


## Data sheet | Item number: 706-3033/601-200

System cable; for Schneider Modicon TM3; 3 analog in- or outputs; Length: 2 m; Conductor cross-section: 0.25 mm<sup>2</sup>



[www.wago.com/706-3033/601-200](http://www.wago.com/706-3033/601-200)

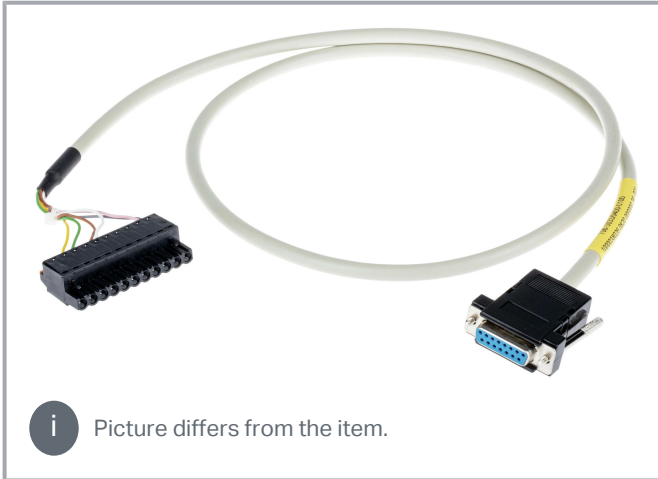

### Data Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.
------	---

### Electrical data

Inputs/outputs	3 analog inputs or outputs
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

### Connection data

Compatible PLC Modules	Schneider Modicon TM3
Compatible PLC I/O Card Types	TM3 TM3(G)
Connection type (1)	System
Pole number 1	15
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	11
Connector 2	TM3 TM3(G)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Cable type	LiYCY
Wire cross-section	0.25 mm <sup>2</sup>
Color code	per DIN VDE 47100

**Physical data**

Cable length	2 m
--------------	-----

**Material data**

Weight	245 g
--------	-------

**Environmental requirements**

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

**Commercial data**

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143628129
Customs tariff number	85444290900

**Downloads****Documentation****System Description**

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

**Environmental Product Compliance****Compliance Search**

Environmental Product Compliance 706-3033/601-200	URL	Download
System cable; for Schneider Modicon TM3; 3 analog in- or outputs; Length: 2 m; Conductor cross-section: 0.25 mm <sup>2</sup>		

Subject to changes. Please also observe the further product documentation!



## Installation Notes

Subject to changes. Please also observe the further product documentation!

---

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.