


Data sheet | Item number: 706-2300/602-100

System cable; for Siemens S7-300; 6 analog inputs or outputs (voltage);

Length: 1 m; Conductor cross-section: 0.25 mm²

www.wago.com/706-2300/602-100

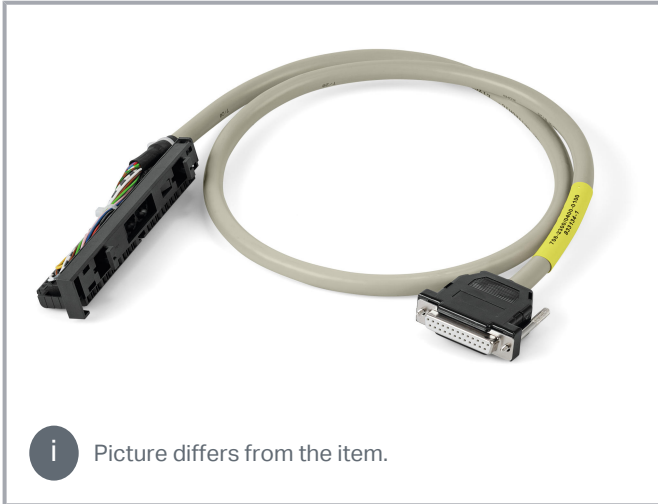

Data

Notes

Note	When using more than 10 wires, the maximum current per wire must be reduced to 1 A.
------	-------------------------------------------------------------------------------------

Electrical data

Inputs/outputs	6 analog inputs or outputs; voltage
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

Connection data

Compatible PLC Modules	Siemens S7-300
Compatible PLC I/O Card Types	6ES7 334-0CE01-0AA0
Connection type (1)	System
Pole number 1	25
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	20
Connector 2	Siemens 6ES7-392-1BJ00-0AA0

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Cable type	LiYCY
Wire cross-section	0.25 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	257 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
-----------------------------------------	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143976794
Customs tariff number	85444290900

Downloads**Documentation****System Description**

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

Environmental Product Compliance**Compliance Search**

Environmental Product Compliance 706-2300/602-100	URL	Download
System cable; for Siemens S7-300; 6 analog inputs or outputs (voltage); Length: 1 m; Conductor cross-section: 0.25 mm ²		

Subject to changes. Please also observe the further product documentation!



Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.