


Data sheet | Item number: 706-3340/300-100

System cable; for Schneider Modicon M340; 16 digital inputs or outputs for higher voltages; Length: 1 m; Conductor cross-section: 0.34 mm²



www.wago.com/706-3340/300-100

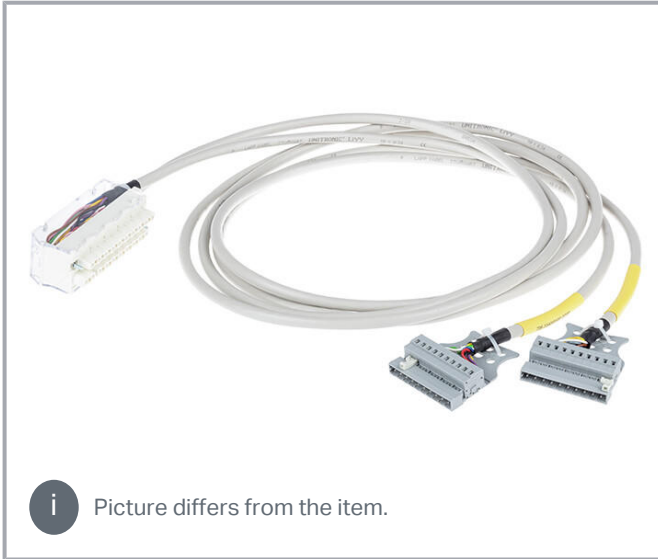

Data

Notes

Note	If less than 3 channels used at the same time, the maximum current per wire 2 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L. If more than 3 channels used at the same time, the maximum current per wire 0.75 A and up to 5 A (amb. T 30 °C) or 3.5 A (amb. T 50 °C) on the power supply pins N/L.
------	--

Electrical data

Inputs/outputs	16 digital inputs or outputs; for higher voltages
Operating voltage	≤ AC/DC 250 V
Current per wire (max.)	0.75 A

Connection data

Compatible PLC Modules	Schneider Modicon M340
Compatible PLC I/O Card Types	BMX DAI 1602 BMX DAI 1603 BMX DAI 1604

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



	BMX DDI 1603 BMX DRA 0805
Connection type (1)	System
Pole number 1	10
Pluggable connectors	WAGO 231 Series
Connection type 2	System
Pole number 2	10
Connector 2	WAGO 231 Series
Connection type (3)	System
Pole number 3	20
Connector 3	Schneider BMXFTB2020
Cable type	LiYY
Wire cross-section	0.34 mm ²
Color code	per DIN VDE 47100

Physical data

Cable length	1 m
--------------	-----

Material data

Weight	330 g
--------	-------

Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

Commercial data

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143980456
Customs tariff number	85444290900

Downloads

Documentation

System Description

WAGO System Wiring, Selection Guide

pdf
545.9 kB

[Download](#)

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



This guide will help you select the appropriate interface modules and system cables for the controller you are using.

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 706-3340/300-100	URL	Download
System cable; for Schneider Modicon M340; 16 digital inputs or outputs for higher voltages; Length: 1 m; Conductor cross-section: 0.34 mm ²		

Installation Notes

Subject to changes. Please also observe the further product documentation!