

KR Electronics, Inc.

General Description


KR Electronics part number 3064 is a 300 MHz lowpass filter. The filter has a minimum 1 dB bandwidth of 300 MHz and a maximum 55 dB bandwidth of 600 MHz. Other bandwidths are available. Please consult the factory.

Features

- 300 MHz Lowpass Filter
- 55 dB min Attenuation at 600 MHz
- Sharp Elliptic Type Design
- 50 Ω Source and Load
- SMA Connectors
- Also available in surface mount

Typical Performance

Overall Response (10 dB/div)

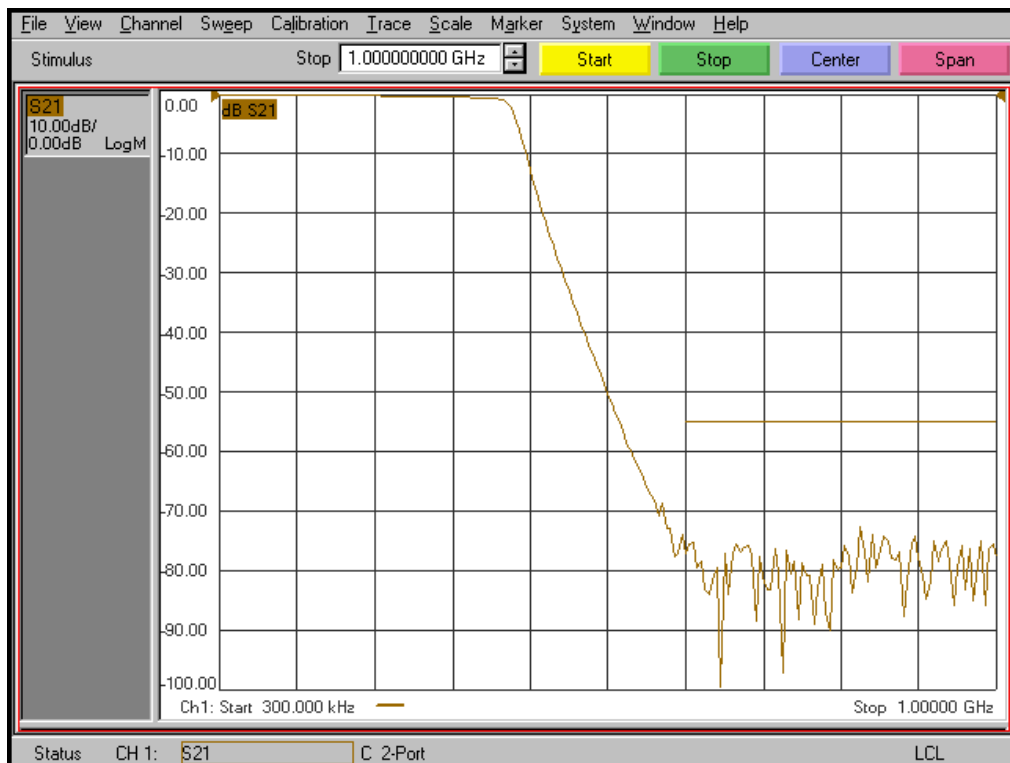

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3064

Passband Amplitude & Group Delay (1 dB/div & 5 nsec/div)



Overall Response (10 dB/div)



KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web: www.krfilters.com
Email: sales@krfilters.com
Phone: (732) 636-1900
Fax: (732) 636-1982

KR Electronics 3064

Specifications

Parameter	Specification
Filter type	Lowpass
End of Passband (1 dB max)	300 MHz
Attenuation at 600 MHz to 1000 MHz	55 dB min > 70 dB typical
Source and Load	50 Ω

Physical Dimensions

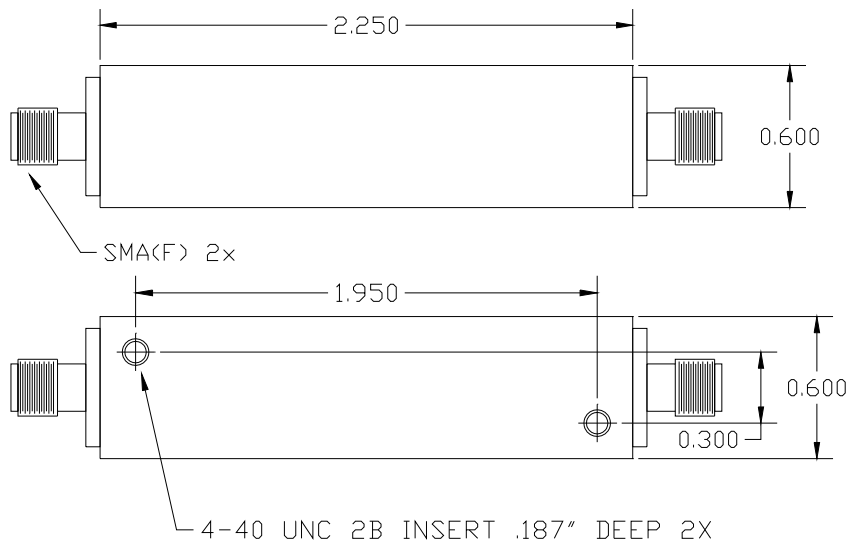

Notes:

1. Dimensions in inches
2. Rectangular case
3. Also available in 0.5" x 1.5" x 0.3" surface mount package

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982