KR Electronics 2489-2 Notch Filter

General Description


KR 2489-2 is a 11.4 MHz notch filter. The filter is designed for 50 Ω source and load impedance. Other notch frequencies, bandwidths and impedances are available. Please consult the factory.

Features

- **Notch Filter**
- **50 Ω**
- **DIP Package**

Typical Performance

Overall Response

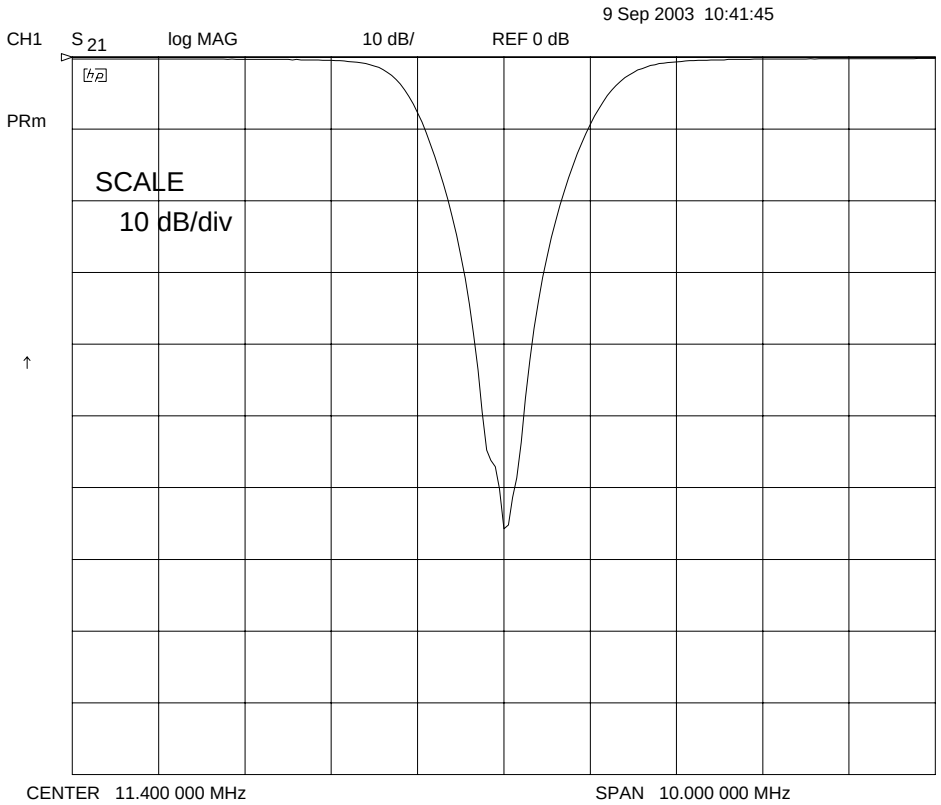

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*


© 2003, KR Electronics, Inc.

KR 2489-2

Specifications

Parameter	Specification
Filter type	Notch
Notch Frequency	11.4 MHz
Maximum 3 dB Bandwidth	4.18 MHz
Source & Load	50 Ω

Physical Dimensions

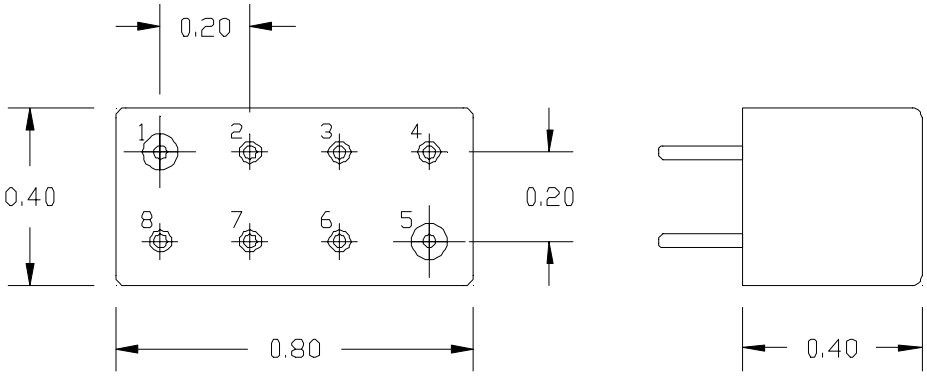

Metal Case
Pin 1 is Input Pin 5 is Output
All other Pins are Ground
All leads .030” diameter
Dimensions inches

KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web *www.krfilters.com*
Email *sales@krfilters.com*
Phone *(732) 636-1900*
Fax *(732) 636-1982*

© 2003, KR Electronics, Inc.