


**Model 7290
LumaVolt, Non Contact AC Voltage Detector**

Press Power Key to turn "on" or "off" both the flashlight and voltage detector function.

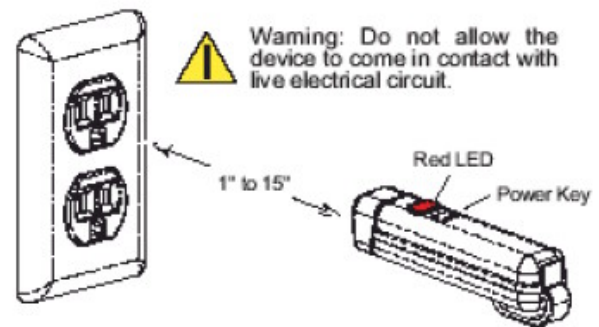

When an AC voltage is detected the Red LED will light.

Non Contact AC Voltage Detector with hands free LED Flashlight

Features

- AC Voltage Detector – Detects Voltages from 40 Vac to 300 Vac from 1 to 15 inches away from the source.
- Flashlight feature includes ultra-Bright white LED with 100,000 hour blub.
- Long Battery Life
- Standard AAA Battery

Specifications

Voltage Range	40 Vac to 300 Vac
Detection Range	1 to 15 inches from source
Temperature	0° C to 50° C
LED Life	100,000 hours

Ordering Information

Model:7290

USA: Sales: 800-490-2361 Fax: 888-403-3360

Europe: 31-(0) 40 2675 150 **International:** 425-446-5500

e-mail: technicalsupport@pomonatest.com

Where to Buy: www.pomonaelectronics.com

All dimensions are in inches. Tolerances (except noted): .xx = ± 0.02 " (.51 mm), .xxx = ± 0.005 " (.127 mm). All specifications are to the latest revisions. Specifications are subject to change without notice. Registered trademarks are the property of their respective companies.