

# 902-928 MHz Dipole Antenna

**AND-C-108**

V3.00

## Features

- Small Size
- High Efficiency
- Low VSWR
- Ground Plane Independent
- Mounting Can Be Customized

## Description


The AND-C-108 dipole provides near theoretical radiation characteristics. The design has been optimized for a small physical size while retaining high radiation efficiency for maximum gain. The antenna is flexible to permit bending without damage.

This antenna is suitable for use in both portable handheld and fixed base equipment applications.



## Specifications

Frequency Range	902-928 MHz
Peak Gain	0 dB Mini
Polarization	Vertical Linear
Nominal Impedance	50 Ohms
VSWR	2.0:1 Max
R. F. Power Handling	1 W Avg. Max 3 W Peak Max
Weight:	12.5 grams
Flex Life:	20,000 cycles $\pm 90^\circ$

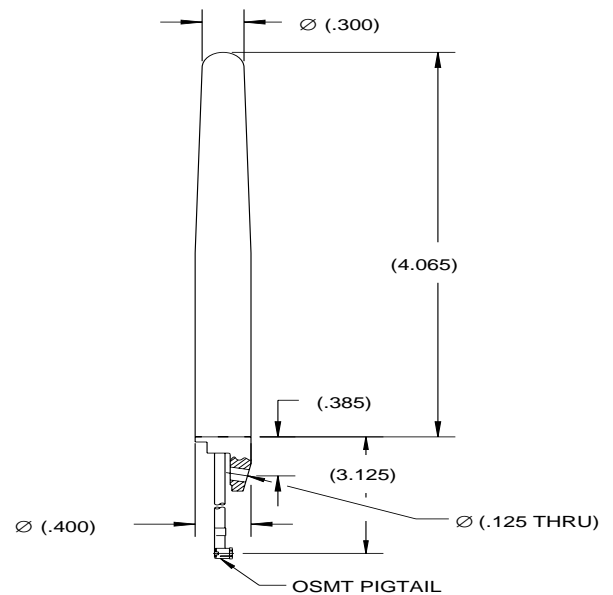

Specifications Subject to Change Without Notice



**M/A-COM Inc.**

North America: Tel. (800) 366-2266  
Fax (800) 618-8883

Asia/Pacific: Tel. +85 2 2111 8088  
Fax +85 2 2111 8087

Europe: Tel. +44 (1344) 869-595  
Fax +44 (1344) 300-020

Typical Electrical Performance

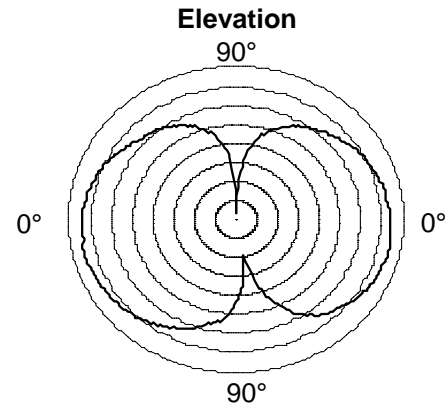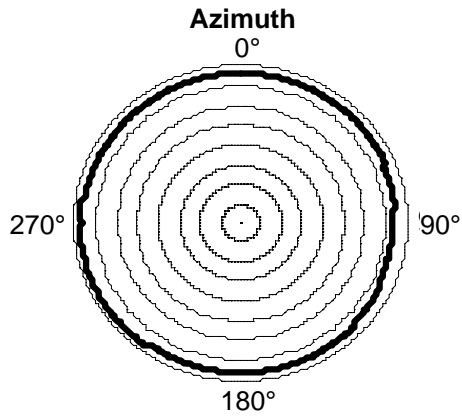

Specifications Subject to Change Without Notice.

**M/A-COM Inc.**

North America: Tel. (800) 366-2266  
Fax (800) 618-8883

♦ Asia/Pacific: Tel. +85 2 2111 8088  
Fax +85 2 2111 8087

♦ Europe: Tel. +44 (1344) 869-595  
Fax +44 (1344) 300-020