

# Active Lowpass Filter




*KR Model  
2376*

KR Model 2376 is easily customized for different cutoff frequencies and gain.  
Contact sales with your requirement.

## Specifications

<b>KR Part Number</b>	<b>2376</b>
<b>Filter Type</b>	60 Hz Active Lowpass Filter
<b>Approximate -3 dB Frequency</b>	60 Hz
<b>Attenuation at 180 Hz and above</b>	>40 dB
<b>Gain</b>	10 dB $\pm$ 0.1 dB
<b>Supply Voltage</b>	$\pm$ 15 V
<b>Supply Current</b>	10 mA max
<b>Operating Temperature</b>	0° C to 70° C
<b>Storage Temperature</b>	0° C to 70° C

## Outline Drawing

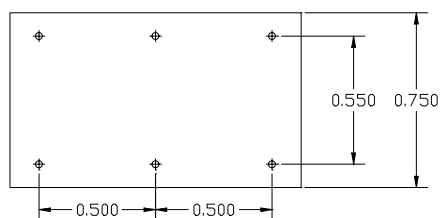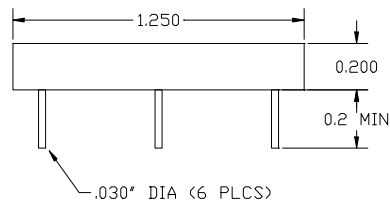

Epoxy Package

All Dimensions inches

**KR Electronics**  
91 Avenel Street  
Avenel, NJ 07001

Phone: (732) 636-1900  
Fax: (732) 636-1982