


# Highpass Filter

KR Model  
2290-35


## Passband Amplitude & Group Delay

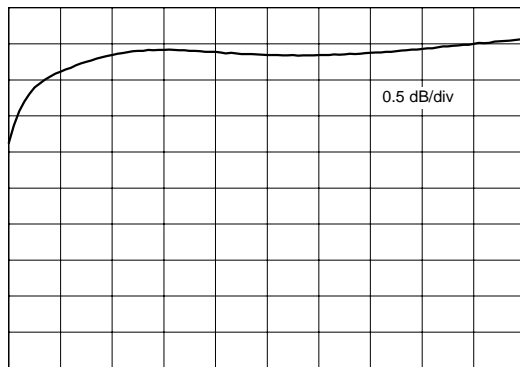

35 MHz

100 MHz

## Overall Amplitude

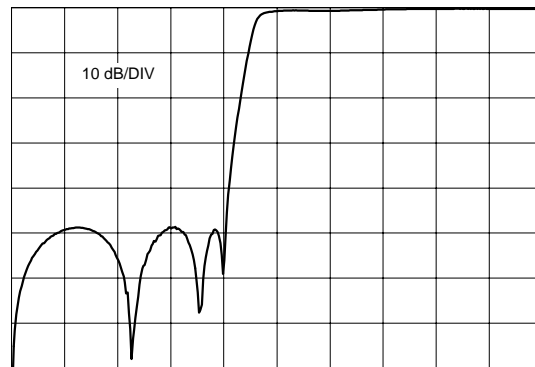


100 KHz

75 MHz

## Specifications

KR Part Number	2290-35
Filter Type	Highpass
Insertion Loss	< 1 dB
End of Stopband >45 dB	30.3 MHz
Start of Passband < 4 dB	35 MHz
Source and Load Impedance	50 Ω

## Outline Drawing

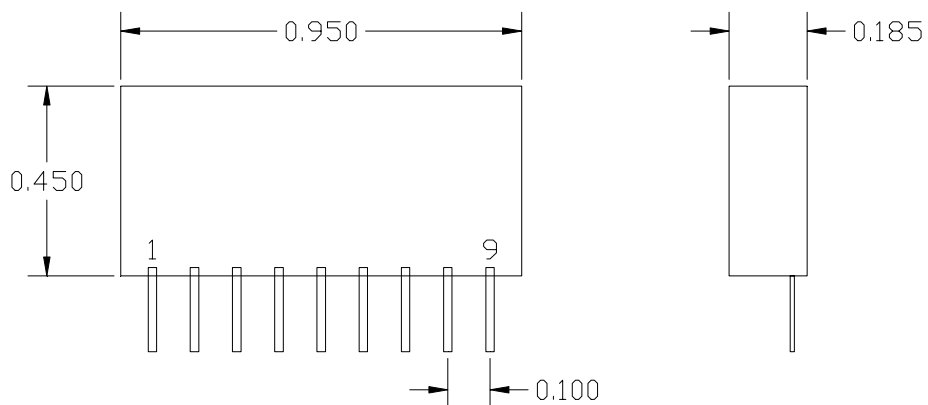

KR Electronics  
www.krfilters.com  
91 Avenel Street  
Avenel, NJ 07001  
732-636-1900

PIN 1 - INPUT  
PIN 9 - OUTPUT  
PIN 2 THRU 8 - GROUND  
UNIT IS UNENCAPSULATED - PARTS ARE EXPOSED