PASTERNACK®
www.pasternack.com

# 75 Ohm F Female to PAL Jack Adapter



## TECHNICAL DATA SHEET PE9634

**75 Ohm F Female to PAL Jack Adapter**

### Configuration

| | |
|---|---|
| Connector 1 | F Female |
| Impedance 1 | 75 Ohms |
| Connector 2 | PAL Jack |
| Impedance 2 | 75 Ohms |
| Adapter Design | Standard |
| Body Style | Straight |

### Mechanical Specifications

**Size**

| | |
|---|---|
| Length, in [mm] | 1.154 [29.31] |
| Width/Dia., in [mm] | 0.43 [10.92] |

**Connector 1**

| | |
|---|---|
| Type | F Female |
| Inner Conductor Material and Plating | Phosphor Bronze, Gold |
| Inner Conductor Plating Specification | 3µ in. minimum |
| Body Material and Plating | Brass, Nickel |
| Body Plating Specification | 100µ in. minimum |
| Dielectric Type | PP |

**Connector 2**

| | |
|---|---|
| Type | PAL Jack |
| Inner Conductor Material and Plating | Brass, Gold |
| Inner Conductor Plating Specification | 3µ in. minimum |
| Body Material and Plating | Brass, Nickel |
| Body Plating Specification | 100µ in. minimum |
| Dielectric Type | POM |

### Compliance Certifications (visit www.Pasternack.com for current document)

| | |
|---|---|
| RoHS Compliant | Yes |

### Plotted and Other Data

| | |
|---|---|
| Notes: | Values at 25 °C, sea level |

URL: http://www.pasternack.com/f-female-pal-jack-straight-adapter-pe9634-p.aspx

75 Ohm F Female to PAL Jack Adapter from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.


Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
**Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2013 Pasternack Enterprises All Rights Reserved

# PE9634 CAD Drawing

75 Ohm F Female to PAL Jack Adapter

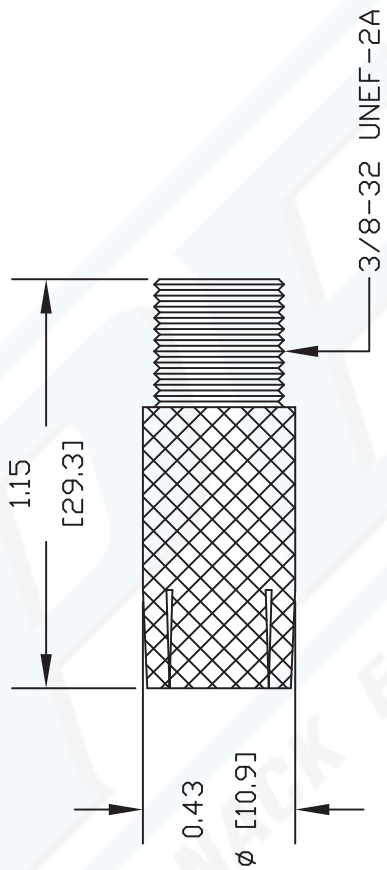


NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE **PE9634**

REV. - | FSCM NO. 53919 | CAD FILE 111502 | SCALE N/A | SIZE A | 127

PASTERNACK ENTERPRISES, INC.
P.O BOX 16759, IRVINE, CA 92623
PHONE (949) 261-1920 FAX (949) 261-7451
WEB ADDRESS: www.pasternack.com
E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS

PASTERNACK ENTERPRISES®
ESTABLISHED 1972

© 2012 Pasternack Enterprises All Rights Reserved