

Technical Data Sheet Chip LED with Right Angle Lens

12-21/Y2C-HL2N1BY/2C

• Package in 8mm tape on 7" diameter reel.

- Compatible with automatic placement equipment.
- Compatible with infrared and vapor phase reflow solder process.
- Mono-color type.
- Pb-free.

Features

• The product itself will remain within RoHS complaint

version.

Descriptions

- The 12-21 SMD LED is much smaller than lead frame type components, thus enable smaller board size, higher packing density, reduced storage space and finally smaller equipment to be obtained.
- Besides, lightweight makes them ideal for miniature applications etc.

Applications

- Backlighting in dashboard and switch.
- Telecommunication: Indicator and backlighting in telephone and fax.
- Flat backlight for LCD, switch and symbol.
- General use.

Device Selection Guide


Part No.	Chip Material	Emitted Color	Resin Color	
12-21/Y2C-HL2N1BY/2C	AlGaInP	Brilliant Yellow	Water Clear	


Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 1 of 10


Device No.: DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian




Package Outline Dimensions

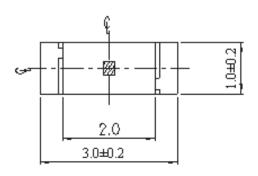






For reflow soldering (propose)



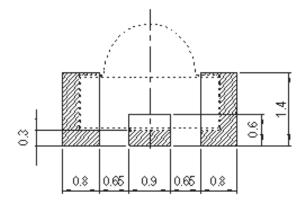

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd.

http://www.everlight.com

Rev.1

Page: 2 of 10

Device No.: DSE-0006457

Prepared date: 10-Jan-2012

Prepared by: Chao DaiJian



Absolute Maximum Ratings (Ta=25°C)

Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	5	V
Forward Current	I_{F}	25	mA
Peak Forward Current (Duty 1/10 @1KHz)	I_{FP}	60	mA
Power Dissipation	P_d	60	mW
ElectrostaticDischarge(HBM)	ESD	2000	V
Operating Temperature	Topr	-40 ~ +85	$^{\circ}\!\mathbb{C}$
Storage Temperature	Tstg	-40~ +90	$^{\circ}\!\mathbb{C}$
Soldering Temperature	Tsol	Reflow Soldering:260 °C for 10 sec Hand Soldering:350°C for 3 sec	

Electro-Optical Characteristics (Ta=25°C)

-		`					
Parameter	Symbol	Min.	Тур.	Max.	Unit	Condition	
Luminous Intensity	I_{V}	14.5		36.0	mcd		
Viewing Angle	$2 heta_{1/2}$		120		deg		
Peak Wavelength	λp		591		nm		
Dominant Wavelength	λd	588		594	nm	I _F =5mA	
Spectrum Radiation Bandwidth	Δλ		15		nm		
Forward Voltage	V_{F}	1.75		2.35	V		
Reverse Current	I_R			10	μΑ	V _R =5V	

Notes:

- 1.Tolerance of Luminous Intensity ±11%
- 2.Tolerance of Dominant Wavelength ±1nm
- 3. Tolerance of Forward Voltage ±0.1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 3 of 10 Device No.:DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian



Bin Range Of Dom Wavelength

Group	Bin	Min	Max	Unit	Condition
Н	DD2	588.0	590.0	nm	I _F =5mA
	DD3	590.0	592.0		
	DD4	592.0	594.0		

Bin Range Of Luminous Intensity

Bin	Min	Max	Unit	Condition
L2	14.5	18.0	mcd	I _F =5mA
M1	18.0	22.5		
M2	22.5	28.5		
N1	28.5	36.0		

Bin Range Of Forward Voltage

Group	Bin	Min	Max	Unit	Condition
	0	1.75	1.95		
В	1	1.95	2.15	V	I _F =5mA
	2	2.15	2.35		

Notes:

1.Tolerance of Luminous Intensity ±11%

2.Tolerance of Dominant Wavelength ±1nm


3.Tolerance of Forward Voltage ±0.1V

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 4 of 10

Device No.:DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian



Typical Electro-Optical Characteristics Curves

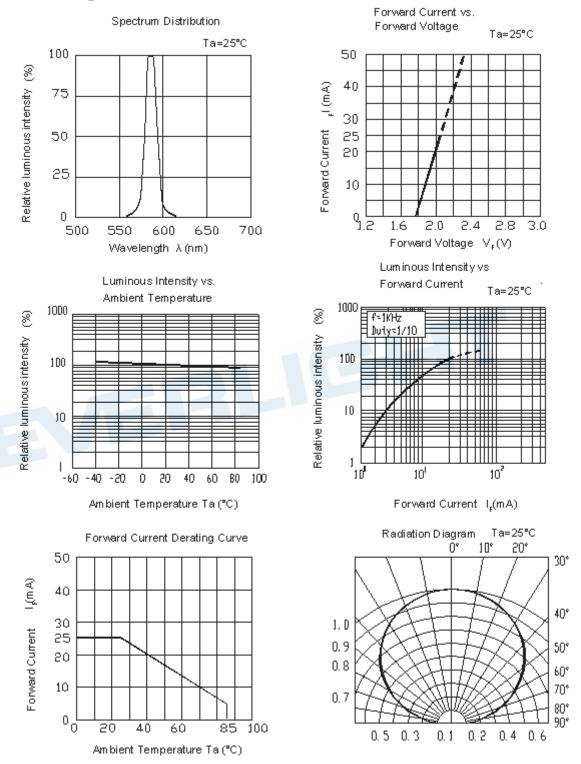

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 5 of 10

Device No.:DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian




Label explanation

CAT: Luminous Intensity Rank

HUE: Chromaticity Coordinates

REF: Forward Voltage Rank



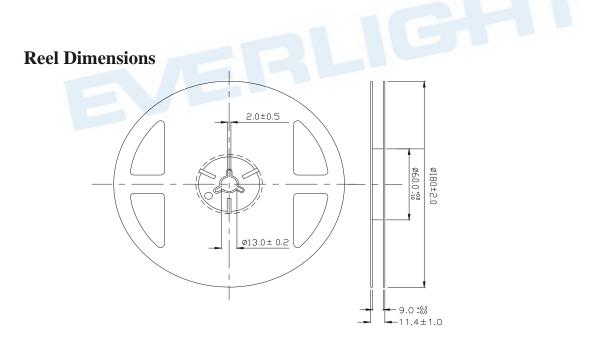


Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 6 of 10

Device No.: DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian




Carrier Tape Dimensions: Loaded quantity 2000 PCS per reel

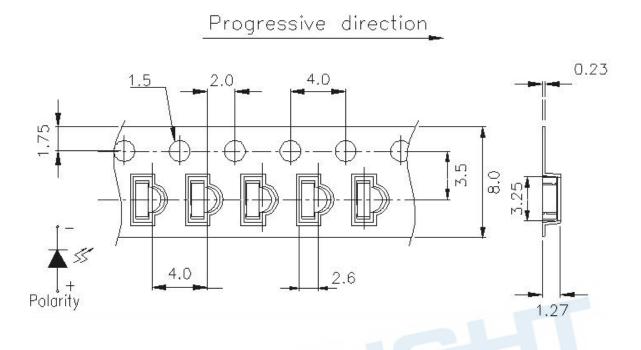

Note: The tolerances unless mentioned is ± 0.1 mm, Unit = mm

Moisture Resistant Packaging

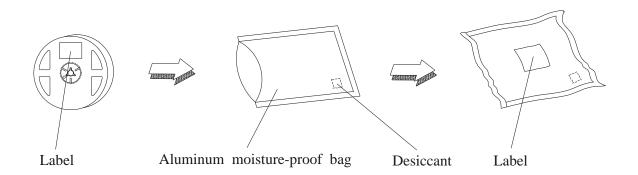

Everlight Electronics Co., Ltd.

Device No.: DSE-0006457

http://www.everlight.com

Prepared date: 10-Jan-2012

Rev.1 Page: 7 of 10

Prepared by: Chao DaiJian



Reliability Test Items And Conditions

The reliability of products shall be satisfied with items listed below.

Confidence level: 90%

LTPD: 10%

No.	Items	Test Condition	Test Hours/Cycles	Sample Size	Ac/Re
1	Reflow Soldering	Temp. : 260°C±5°C Min. 10sec. 6 Min.		22 PCS.	0/1
2	Temperature Cycle	$H: +100^{\circ}\mathbb{C}$ 15min $\int 5 \text{ min}$ $L: -40^{\circ}\mathbb{C}$ 15min	300 Cycles	22 PCS.	0/1
3	Thermal Shock	H:+100°C 5min ∫ 10 sec L:-10°C 5min	300 Cycles	22 PCS.	0/1
4	High Temperature Storage	Temp. : 100°C	1000 Hrs.	22 PCS.	0/1
5	Low Temperature Storage	Temp. : -40°C	1000 Hrs.	22 PCS.	0/1
6	DC Operating Life	$I_F = 20 \text{ mA}$	1000 Hrs.	22 PCS.	0/1
7	High Temperature / High Humidity	85°C / 85% RH	1000 Hrs.	22 PCS.	0/1

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 8 of 10

Device No.:DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian



Precautions For Use


1. Over-current-proof

Customer must apply resistors for protection, otherwise slight voltage shift will cause big current change (Burn out will happen).

2. Storage

- 2.1 Do not open moisture proof bag before the products are ready to use.
- 2.2 Before opening the package, the LEDs should be kept at 30°C or less and 90%RH or less.
- 2.3 After opening the package: The LED's floor life is 1 year under 30°C or less and 60% RH or less. If unused LEDs remain, it should be stored in moisture proof packages.
- 2.4 If the moisture absorbent material (silica gel) has faded away or the LEDs have exceeded the storage time, baking treatment should be performed using the following conditions.

 Baking treatment: 60±5°C for 24 hours.
- 3. Soldering Condition
 - 3.1 Pb-free solder temperature profile

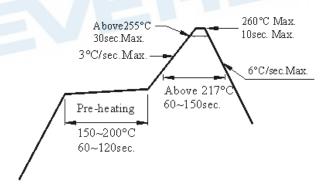

- 3.2 Reflow soldering should not be done more than two times.
- 3.3 When soldering, do not put stress on the LEDs during heating.
- 3.4 After soldering, do not warp the circuit board.

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 9 of 10

Device No.:DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian




4. Soldering Iron

Each terminal is to go to the tip of soldering iron temperature less than 350° C for 3 seconds within once in less than the soldering iron capacity 25W. Leave two seconds and more intervals, and do soldering of each terminal. Be careful because the damage of the product is often started at the time of the hand solder.

5.Repairing

Repair should not be done after the LEDs have been soldered. When repairing is unavoidable, a double-head soldering iron should be used (as below figure). It should be confirmed beforehand whether the characteristics of the LEDs will or will not be damaged by repairing.

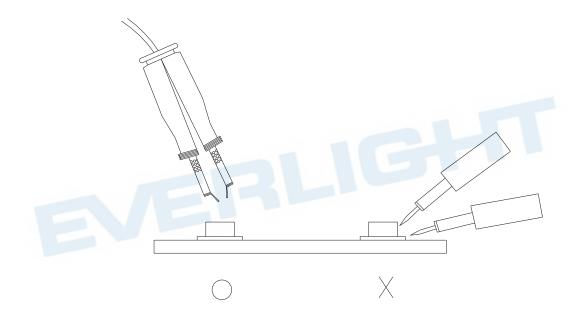

EVERLIGHT ELECTRONICS CO., LTD.

Office: No 25, Lane 76, Sec 3, Chung Yang Rd, Tucheng, Taipei 236, Taiwan, R.O.C Tel: 886-2-2267-2000, 2267-9936

Fax: 886-2267-6244, 2267-6189, 2267-6306

http://www.everlight.com

Everlight Electronics Co., Ltd. http://www.everlight.com Rev.1 Page: 10 of 10 Device No.:DSE-0006457 Prepared date: 10-Jan-2012 Prepared by: Chao DaiJian