

2012 Size

1.92/1.98GHz Band Chip Multilayer Coupler


FSLC-S190E-W

All the technical data and information contained herein are subject to change without notice.




LC-FSLC-S190E-W-0408A

Equivalent Circuits

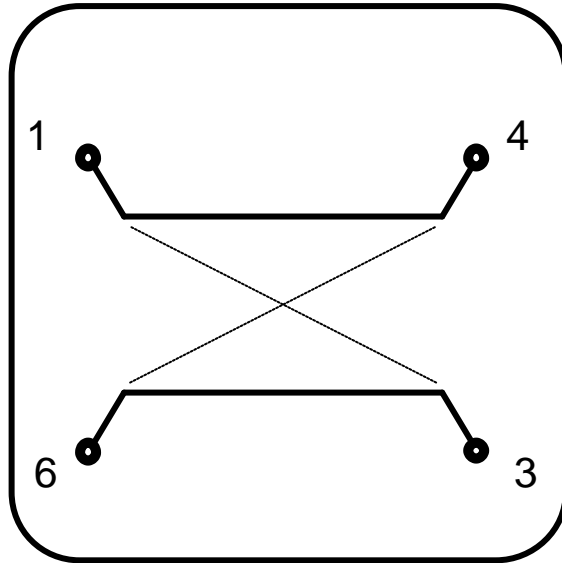

Shape & Size

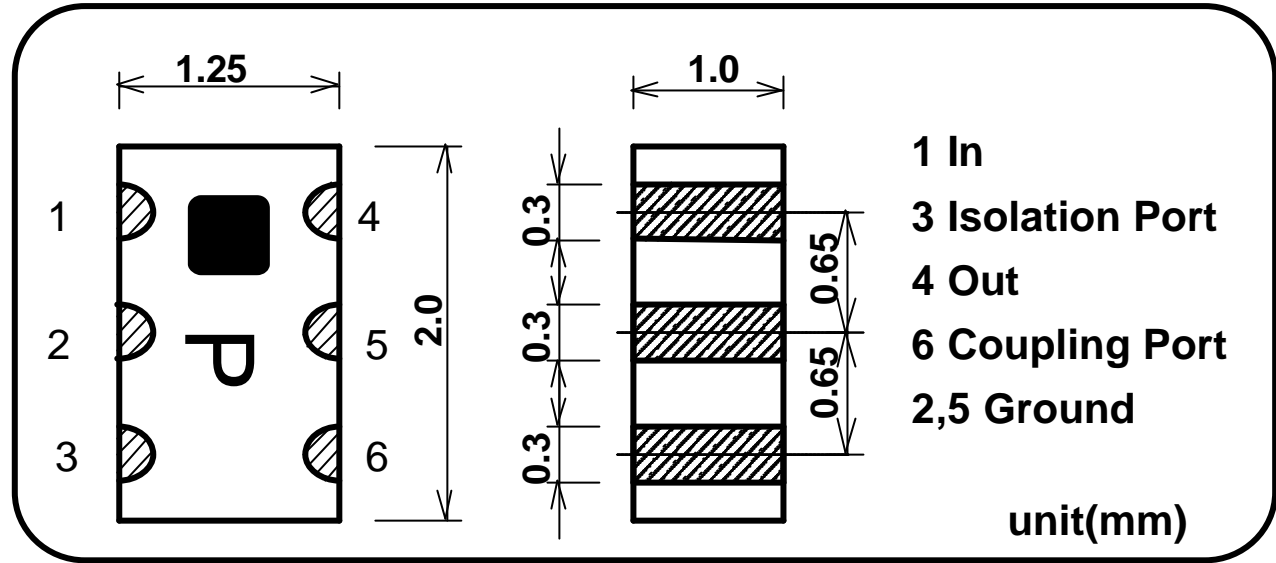

Specifications






P/N: FSLC-S190E-W

Frequency Range(MHz)	Coupling	Insertion Loss	Isolation	Return Loss	Handling Power	Temperature Range
1920-1980	20.5 +/- 1.5dB	0.5dB Max. (0.25dB Typ.)	30dB Typ.	14dB Min. (22dB Typ.)	1W Max. (CW)	-35 to +85 deg.C


All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S190E-W-0408A

FSLC-S190E-W Sample Data

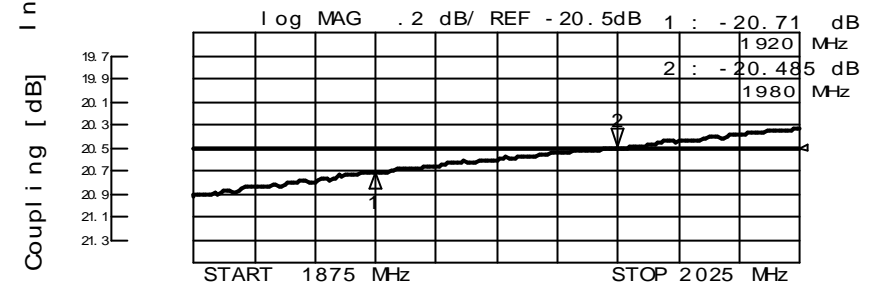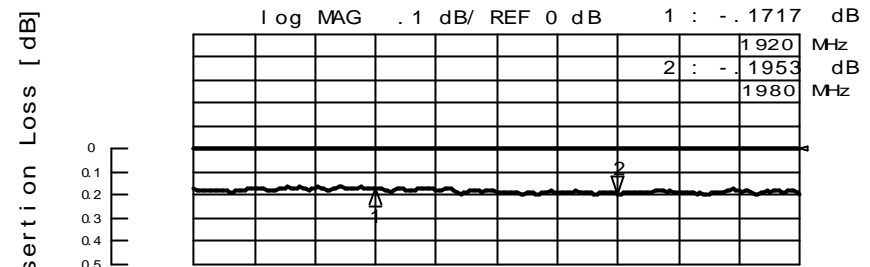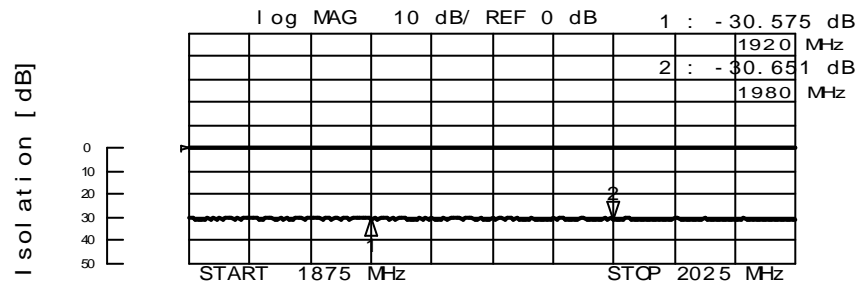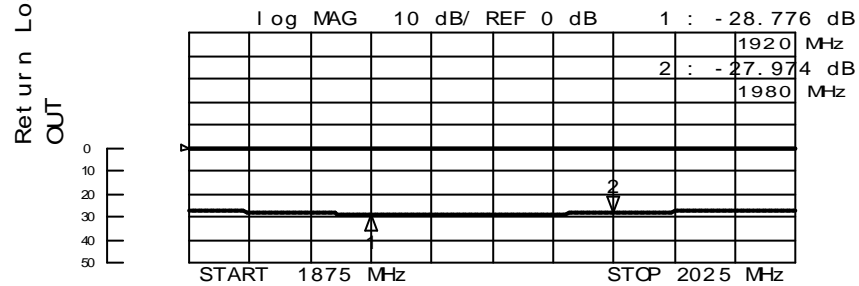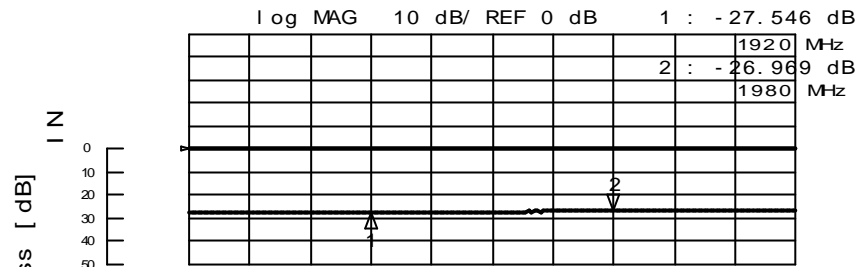


1.92/1.98GHz Band
Chip Multilayer Coupler "FSLC-S190E-W"

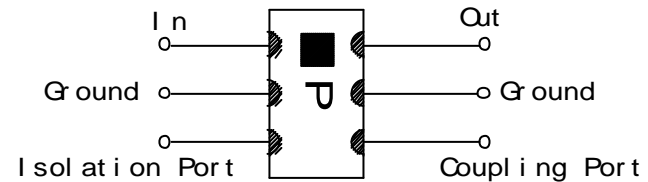

All the technical data and information contained herein are subject to change without notice.

FOOT PATTERN

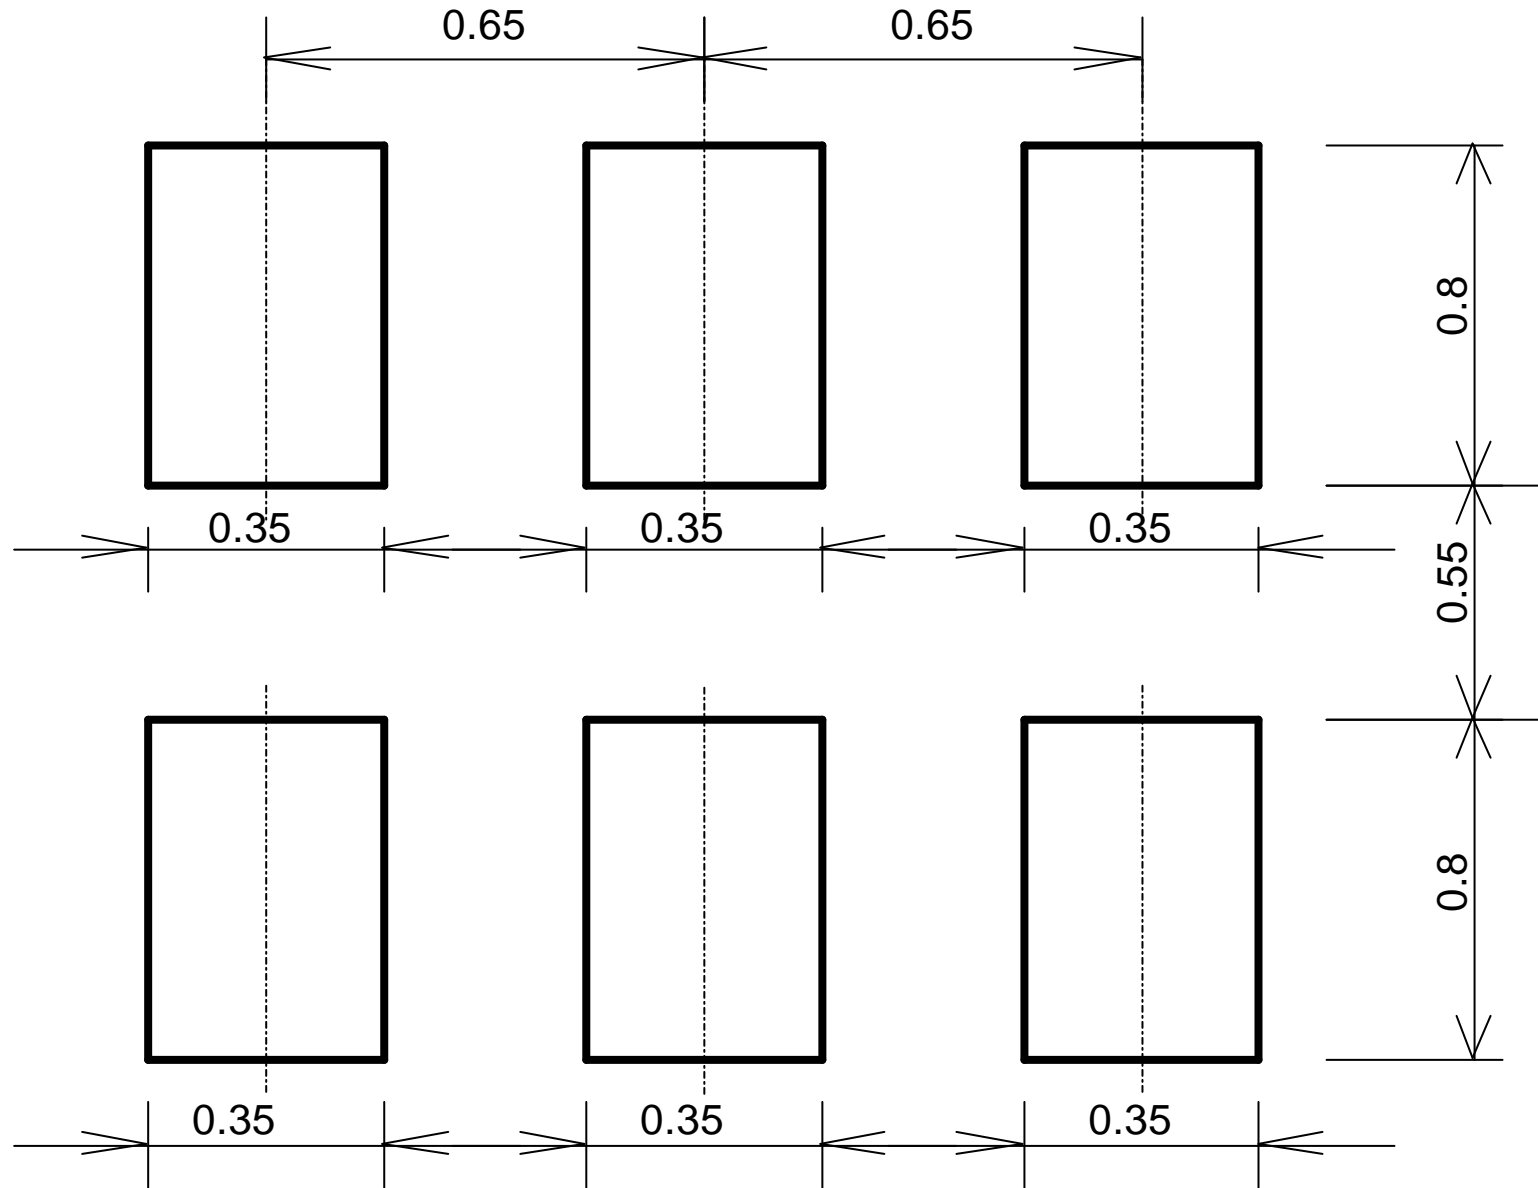

All the technical data and information contained herein are subject to change without notice.

LC-FSLC-S190E-W-0408A