

# KR Electronics, Inc.

## General Description


KR Electronics part number 3054 is a 252 KHz notch filter.  
Please consult the factory for other frequencies.

### Features

- Notch filter
- 252 KHz Notch Frequency
- 50  $\Omega$
- SMA Connectors

## Typical Performance

**Overall Response**  
(10 dB/div)

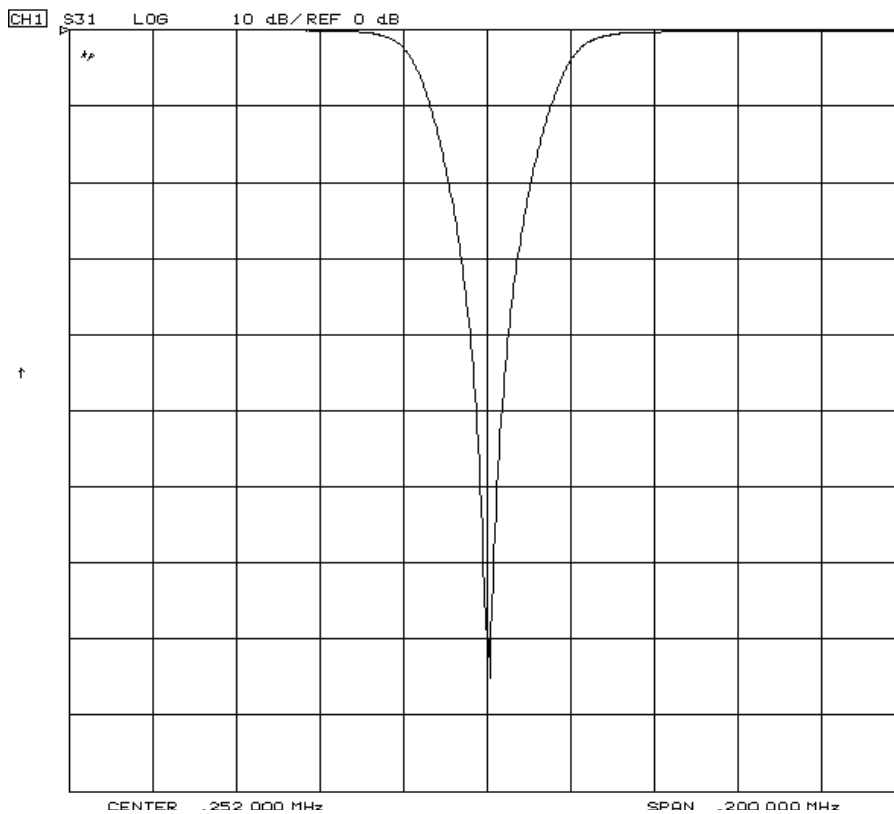

KR Electronics, Inc.  
91 Avenel Street  
Avenel, NJ 07001


Web [www.krfilters.com](http://www.krfilters.com)  
Email [sales@krfilters.com](mailto:sales@krfilters.com)  
Phone (732) 636-1900  
Fax (732) 636-1982

# KR Electronics 3054

## Specifications

Parameter	Specification	
Filter type	Notch	
Notch Frequency	252 KHz	
3 dB Bandwidth	50.4 KHz max	40.4 KHz typical
40 dB Bandwidth	5 KHz min	9.2 KHz typical
Source and Load	50 Ω	

## Physical Dimensions

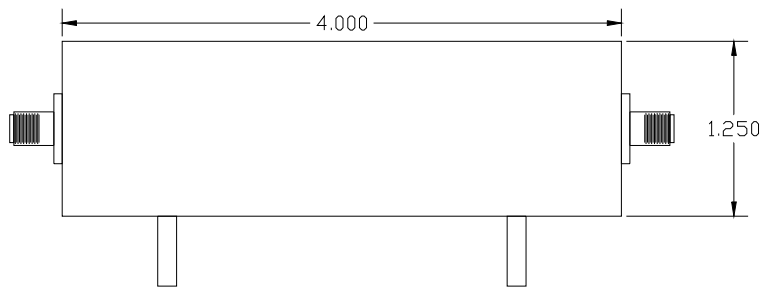

Notes:

1. Dimensions in inches
2. May be supplied in alternate case

