


Highpass Filter

KR Model
2290-55


Passband Amplitude & Group Delay

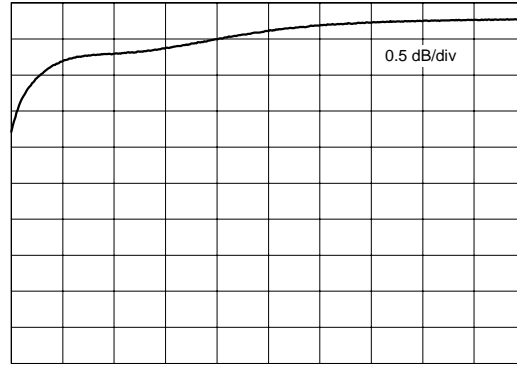

55 MHz

100 MHz

Overall Amplitude

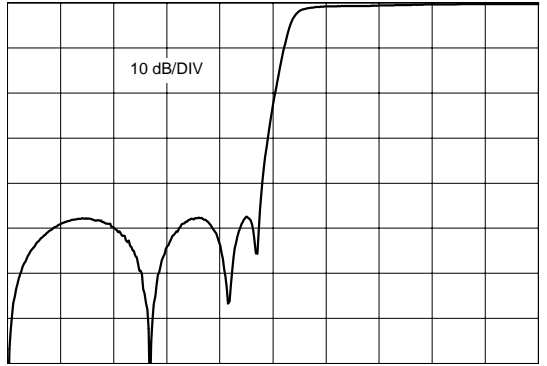


100 KHz

100 MHz

Specifications

KR Part Number	2290-55
Filter Type	Highpass
Insertion Loss	< 1 dB
End of Stopband >45 dB	47.62 MHz
Start of Passband < 4 dB	55 MHz
Source and Load Impedance	50 Ω

Outline Drawing

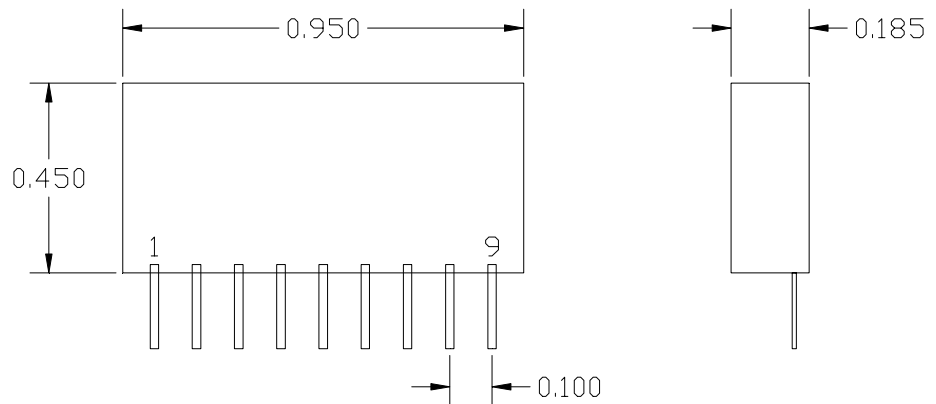

PIN 1 - INPUT
 PIN 9 - OUTPUT
 PIN 2 THRU 8 - GROUND
 UNIT IS UNENCAPSULATED - PARTS ARE EXPOSED

KR Electronics
 www.krfilters.com
 91 Avenel Street
 Avenel, NJ 07001
 732-636-1900