


## Data sheet | Item number: 706-4769/601-200

System cable; for Rockwell Compact Logix; 6 analog inputs or outputs (voltage); Length: 2 m; Conductor cross-section: 0.25 mm<sup>2</sup>

[www.wago.com/706-4769/601-200](http://www.wago.com/706-4769/601-200)

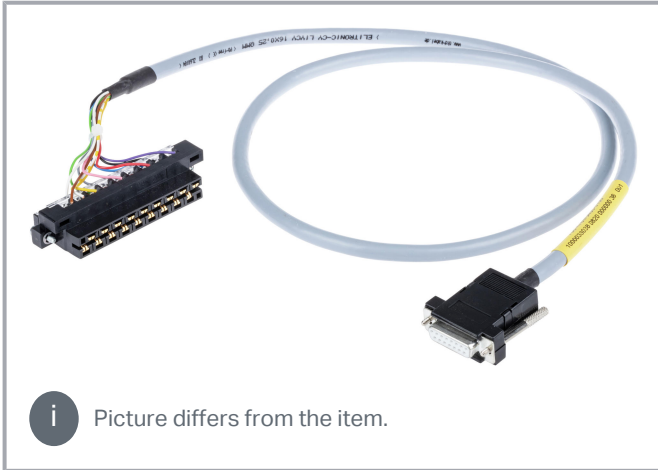

### Data

#### Notes

Note When using more than 10 wires, the maximum current per wire must be reduced to 1 A.

#### Electrical data

Inputs/outputs	6 analog inputs or outputs; voltage
Operating voltage	≤ AC/DC 35 V
Current per wire (max.)	2 A

#### Connection data

Compatible PLC Modules	Rockwell Compact Logix
Compatible PLC I/O Card Types	1769 - IF4XOF2 (F)
Connection type (1)	System
Pole number 1	25
Pluggable connectors	D-sub female connector
Connection type 2	System
Pole number 2	18
Connector 2	Rockwell-RTBN18
Cable type	LIYCY

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



Wire cross-section	0.25 mm <sup>2</sup>
Color code	per DIN VDE 47100

### Physical data

Cable length	2 m
--------------	-----

### Material data

Weight	520 g
--------	-------

### Environmental requirements

Surrounding air temperature (operation)	-20 ... 50 °C
---	---------------

### Commercial data

PU (SPU)	1 Stück
Packaging type	bag
Country of origin	FR
GTIN	4055143985970
Customs tariff number	85444290900

### Downloads

#### Documentation

##### System Description

WAGO System Wiring, Selection Guide	pdf	Download
This guide will help you select the appropriate interface modules and system cables for the controller you are using.	545.9 kB	

### Environmental Product Compliance

#### Compliance Search

Environmental Product Compliance 706-4769/601-200	URL	Download
System cable; for Rockwell Compact Logix; 6 analog inputs or outputs (voltage); Length: 2 m; Conductor cross-section: 0.25 mm <sup>2</sup>		

### Installation Notes

Subject to changes. Please also observe the further product documentation!

WAGO GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.