ISO9001: 2000	ISO14001: 2004

KANAFA2 0504B0404	
Part NO. KAN4542-0501B0101	
Customer's Part NO.	
Customer STart NO.	
Model:	

Customer's Approval Requested. Please return this copy as a certification of your approval. Checked by: Date: Approved by: Date:

APPROVE	REVIEW	POLT
廖明谷	项永才	王蕾蕾

WENZHOU GANGYUAN ELECTRONICS CO., LTD.



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN4542-0501B0101		

1、 概述

GENERAL

1.2 适用范围

APPLICATION

此规格书适用于机械式轻触开关的相关要求

This specification is applied to the requirements for TACTILE SWITCH (MECHANICAL CONTACT)

1.3 工作温度范围

Operating Temperature Range

- -20℃~70℃(在标准大气压、标准湿度条件下)
- -20°C ~70°C (Normal humidity, normal air pressure)
- 1.4 贮藏温度范围

Storage Temperature Range

- -30℃~80℃(在标准大气压、标准湿度条件下)
- -30° C \sim 80 $^{\circ}$ C (Normal humidity, normal air pressure)
- 1.5 测试条件

Test Conditions

在没有其它特定的条件下,应该在以下的条件下进行测试和测量:

Unless otherwise specified, tests and measurement shall be made in the following standard conditions:

常温......5℃~35℃

Normal temperature......5°C ~35°C

标准湿度......相对湿度 25%~85%

Normal humidityrelative humidity 25%~85%

标准大气压......86KPa~106Kpa

Normal air pressure......86Kpa~106Kpa

在制造过程中,测试和测量应该在以下的条件下进行:

If any doubt arise from the judgment, tests shall be conducted at the following conditions:

温度......20℃±2℃

Temperature20℃±2℃

相对湿度......65%±5%

Relative humidity......65%±5%

环境气压......86KPa~106Kpa

Air pressure......86KPa \sim 106Kpa

 APPROVE BY
 廖明谷 14. 11. 29
 CHECKED BY
 项永才 14.11.29
 PRPARE BY
 王蕾蕾 14.11.29



CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN4542-0501B0101		

2、 详细说明

Detailed specification

2.1 外观:应无影响、降低产品性能的缺陷;

Appearance: There should be no defects that affect the serviceability of product.

2.2 结构尺寸和安装尺寸:应符合装配图要求;

Style and dimension: shall conform to the assemble drawings.

2.3 操作形式:有触觉反应的操作

Type of actuating: Tactile feedback.

2.4 开关结构: 单回路单输出(具体的触点结构在装配图中已绘出);

Contact arrangement: 1 pole, 1 throw

(Details of contact arrangement are given in the assembly drawings.)

2.5 开关工作额定值: DC 12V, 50mA (有效值)

Ratings: 12V DC, 50mA (effective value)

3. 电气性能:

ELECTRICAL SPECIFICATION

项	目		<u>-</u>	试验条件			要求
ITI	EM		TE	ST CONDITIONS		RE	QUIREMENTS
1		接触电阻 act Resistance					≤100mΩ
2		绝缘电阻 Insulation Resistance	在端子之间施加 D 之间底座、盖板的电阻	C 100V /1min 的条件 值 III be made following across terminals,	application of		≥100MΩ
3	介质耐压 在端子之间施加 250V AC (50HZ 或 60HZ) /1min 250V AC (50HZ or 60HZ) shall be applied across voltage proof terminals, for one minute.					无击穿、无飞弧 There should be b breakdown and flashover	
APPROVE BY 廖明谷 14. 11. 29 CHECKED BY 项永才 14.11.29 PRPARE I			PRPARE B	Y	王蕾蕾 14.11.29		



		GANGYUAI	N APP	ROVAL	SPECIF	ICAT	IONS	
С	USTOMER	CUSTOMER'	S P/N GYE	'S P/N	PRODUCT		REVISION	
				0501B0101			77 D	
	项目 ITEM		试 验 条 TEST COND			RE	要求 REQUIREMENTS	
4	触点抖动 Bounce	在导通和断开定 Lightly striking normal use (3 tested at "ON"	开关 Switch 10KΩ	ON-3	msec.max 8msec.max			
	械性能: IANICAL SP	ECIFICATION						
1	按力 Operating Force	量开关导通所需 Placing the sw vertical and the center of the s	开关垂直于操作方向放置,在开关驱动件顶端中心逐渐施力,测量开关导通所需的最大力度。 Placing the switch such that the direction of switch operation is vertical and then gradually increasing the load applied to the center of the stem, the maximum load required for the switch to come to a stop shall be measured.					
2	最大行程 Full Trave	开关垂直于操作方向放置,以一个等于 2 倍按力的静负荷施加在 开关驱动件顶端中心,测量顶端移动的距离。 Placing the switch such that the direction of switch operation is vertical and then applying static load of 2times operating force to the center of the stem; the travel distance for the switch to come to a stop shall be measured.					0.25±0.1mm	
APP	ROVE BY	廖明谷 14.11.29	CHECKED BY	项永才 14.	11.29 PRPA	RE BY	王蕾蕾 14.11.29	



	GANGYUAN APPROVAL SPECIF							IONS
С	SUSTOMER	CUSTOMER'S P/N	GYE'S	S P/N	Pl	RODUCT		REVISION
			KAN4542-0)501B0101				
	项目 ITEM			要求 QUIREMENTS				
3	回弹力 Return Force	开关垂直于操作方向放 后,测量顶端向自由位 The sample switch is operation is vertical ar to the whole travel dist	开关垂直于操作方向放置,在开关驱动件顶端中心下降至全行程 后,测量顶端向自由位置转换的力度。					0.4N min.
4	停止强度 Stop Strength	荷持续 1min。 Placing the switch sucvertical, and then a s	开关垂直于操作方向放置,从操作方向向驱动件施加 30N 的静负荷持续 1min。 Placing the switch such that the direction of switch operation is vertical, and then a static load of 30N shall be applied in the direction of stem operation for a period of 1 min.					L械和电气损坏 shall be no sign of e mechanically and electrically.
5	手柄拔出 强度 Stem Strength	开关垂直于操作方向放的行程范围。 Placing the switch sucvertical, and then the ropposite to the direction	ch that the di maximum for	rection of sy	witch op and a pu	eration is		20N.min.
6	可焊性 Solderability	可焊性 olderability (1) 焊接温度:245±5℃ Solder temperature : 245±5℃ Exc coal coal coal coal coal coal coal coa					90%以」 Except	for the edge, the should cover a
APP	PROVE BY	寥明谷 14. 11. 29 CHE (CKED BY	项永才 14.	11.29	PRPAR	RE BY	王蕾蕾 14.11.29



С	USTOMER	(CUSTOMER	'S P/N	GYE'	S P/N	PR	ODUCT		REVISION
		KAN4542-0501B0101								
	项目				试 验	条件				要求
	ITEM				TEST CON	IDITIONS			RE	QUIREMENTS
1	5、极限电气性能: ENVIRONMENTAL SPECIFICATION									
1	低温测试 normal temperature and humidity conditions for 1 h before measurements are made: Solution Condition Condition						Contact ≤200ms 项目 3,4			
2	高温测试 Heat resista	ince	measurements are made: (1) 温度: 80±2℃ temperature:80±2℃ (2) 时间: 96h ≤200mΩ 项目 3,4.1,4.2,4.3 Item 3,4.1,4.2,4.3							t resistance: Ω 4.1,4.2,4.3
3	Change	温度周期性测试 Change of temperature Time -10±2℃ 2(hour) -10~65℃ 1 65±2℃ 2						Contact ≤200ms 项目 3,4		
						王蕾蕾 14.11.29				



GANGYUAN APPROVAL SPECIFICATIONS								
С	USTOMER	MER CUSTOMER'S P/N GYE'S P/N PRODUCT				REVISION		
			KAN4542-050	1B0101				
	项目		试验条/			要求		
	ITEM		TEST CONDIT	IONS		REC	QUIREMENTS	
4	湿温测试 Moisture resistance	标准湿度的环境 Following the te normal tempera measurements (1) 温度: 6 temperat (2) 相对湿度 relative h (3) 时间: 9	temperature: 60±2℃ (2) 相对湿度: 90%~95% relative humidity:90% to 95%					
5	硫化试验 Sulfuration resistance	标准湿度的环境 Following the te normal tempera measurements: (1) H ₂ S 气体 H ₂ S gas (2) 时间: 7 Time: 72	H ₂ S gas concentration: 3ppm±1ppm (2) 时间: 72h Time: 72h (3) 温度: 40±2℃(90~95%RH)					
6	盐雾试验 Salt Mist	在以下设定条件下进行测量: The switch shall be checked after following test: (1) 温度: 35℃±2℃ temperature: 35℃±2℃ (2) 盐溶液浓度: 5±1% (质量百分比) salt solution: 5±1%(solids by mass) (3) 时间: 8h±1h Time: 8h±1 hour 实验后的盐沉积物用水冲掉 After test, salt deposit shall be removed by running water.					arkable corrosion e recognized in	
APP	PROVE BY	寥明谷 14. 11. 29 C	CHECKED BY 項	[永才 14.11.29	PRPARE	E BY	王蕾蕾 14.11.29	



С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT		REVISION		
			KAN4542-0501B0101					
	限机械性能:	DECISIO ATION						
ᆫ	NDURANCE SF 项目	PECIFICATION	试 验 条 件			要求		
	ITEM		TEST CONDITIONS		RE	QUIREMENTS		
1	工作寿命 Operation life	Measurement shall (1) DC 12V, 50 DC 12V, 50 (2) 按动速率: 1 Rate of ope (3) 按力: 按力 Operating Fo (4) 平均无故障	Operating Force: Operating Force1.5 double 项目 3,4.1,4.2,4.3					
2	根据以下给定条件进行测试: Measurement shall be made following the test set forth below: (1) 振动频率范围: 10~55~10Hz Vibration frequency range: 10 to 55 to 10Hz (2) 振幅(峰一峰): 1.5mm Amplitude: 1.5mm (3) 振动方向:包括手柄行程方向在内的三个相互垂直的方向 Direction of vibration:Three mutually perpendicular direction including the direction of stem travel (4) 测试时间:每次 2hours. Duration: Each 2hours.							
	接条件: ERING CONDIT	ΓΙΟNS:						
7.1	手工焊接 Hand solderin	(1) 焊锡温 (2) 连续焊 Please pra (1) Solder	条件进行焊接: 温度: ≤350℃ 焊接时间: ≤3 s actice according to below ing temperature: 350℃ uous soldering time: 3 s M	Max.				



С	USTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	Г	REVISION
			KAN4542-0501B0101			
	项目		推考	条件	•	
	ITEM		Recommen	ded conditions		
7.2	回流焊时 Conditions for reflow	温度(*C) 180 - 150 -	120sec max.(预 3 to 4 m 炉内通过	in.	- 260°C n _ 230°C	nax. 3sec max. — 时间 —
136 HH	·					

说明: 1.1 开关浸焊后,注意不要用溶剂清洗。

After switches were soldered, please be careful not to clean switches with solvent.


- 1.2 在使用烙铁的情况下,焊锡温度应在 350℃以下、3 秒以内。 In the case of using solding iron, solding conditions shall be 350℃ max and 3 sec.max.
- 1.3 浸焊后,注意不要在顶部施加负荷。
 Right after switches were soidered; please be careful not to load to on the knobs of switches.
- 2 设计中应注意的事项(Design instructions):
- 2.1 印刷基板的安装孔尺寸参见产品图。
 Follow recommended P.W.B. piercing plan in outside drawing page.
- 3 注意点(Note):
- 3.1 注意不要施加超负荷的压力或晃动开关
 Please be cautions not to give excessive static load or shock to swiches.
- 3.2 开关浸焊后,印刷基板注意不要叠放。
 Please be careful not to pile up P.W.B.after switches were soldered
- 3.3 保管时尤其应注意避开高湿高温和有腐蚀性气体的环境。如需要长时间保存,请不要打开包装箱。 Preservation under high temperature and high high humidity or corrosive gas should be avoided Especially . When you need to preserve for a long period ,do not open the carton .


APPROVE BY	廖明谷 14.11.29	CHECKED BY	项永才 14.11.29	PRPARE BY	王蕾蕾 14.11.29





GANGYUAN APPROVAL SPECIFICATIONS

CUSTOMER	CUSTOMER'S P/N	GYE'S P/N	PRODUCT	REVISION
		KAN4542-0501B0101		

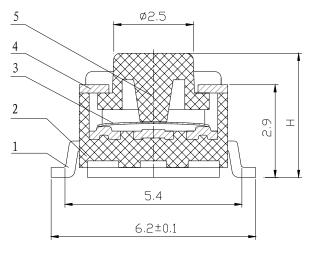



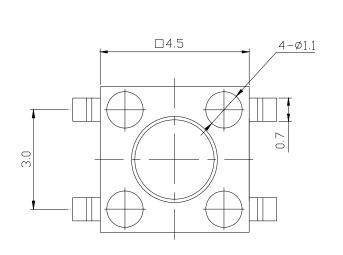

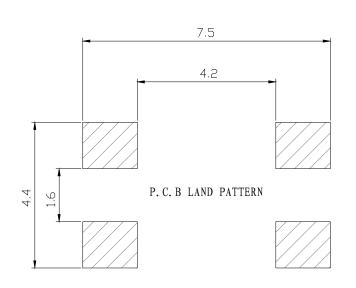

General tolerance: ±0.2mm H=5.0

NO.	NAME	MATERIAL	NATIONALITY	QTY.	FINISHING
1	TERMINAL	Brass	China	1	Silver plating
2	CASE	FR52	USA	1	Black
3	CONTACT	STS 301R	Korea	1	Contact side silver plating
4	COVER	SUS□			
5	STEM	FR52	USA	1	Black

APPF	ROVE BY	廖明谷 14.11.29	CHECKED BY	项永才 14.11.29	PRPARE BY	王蕾蕾 14.11.29