



WR-187 to N Female Waveguide to Coax Adapter 3.95 GHz to 5.85 GHz

TECHNICAL DATA SHEET

PE9822

WR-187 to N Female Waveguide to Coax Adapter 3.95 GHz to 5.85 GHz

Configuration

Waveguide Interface	WR-187
Flange Design	WR
RF Connector	N Female

Electrical Specifications

Frequency Range, GHz	3.95 to 5.85
Maximum VSWR	1.3:1

Mechanical Specifications

Size

Length, in [mm]	2.78 [70.61]
Width/Dia., in [mm]	1.78 [45.21]
Height, in [mm]	2.24 [56.9]

Waveguide Interface

Type	WR-187
Body Material and Plating	Aluminum

RF Connector

Type	N Female
------	----------

Compliance Certifications (visit www.Pasternack.com for current document)

Plotted and Other Data

Notes: Values at 25 °C, sea level

WR-187 to N Female Waveguide to Coax Adapter 3.95 GHz to 5.85 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [WR-187 to N Female Waveguide to Coax Adapter 3.95 GHz to 5.85 GHz PE9822](http://www.pasternack.com/wr-187-n-female-waveguide-coax-adapter-3.95-ghz-5.85-ghz-pe9822-p.aspx)

URL: <http://www.pasternack.com/wr-187-n-female-waveguide-coax-adapter-3.95-ghz-5.85-ghz-pe9822-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.




PE9822 CAD Drawing

WR-187 to N Female Waveguide to Coax Adapter 3.95 GHz to 5.85 GHz

Dimension	Inches	mm
A	0.810	20.57
B	1.620	41.15
C	2.430	61.72
D	0.247	6.27
E	1.183	30.05
F	1.430	36.32
G	1.215	30.86
H	2.781	70.64
I	0.715	18.16
J	1.781	45.24
K	1.872	47.55
L	0.872	22.15

Option	Inches	mm
M	0.250	6.35
N	1.880	47.75
O	2.245	57.02

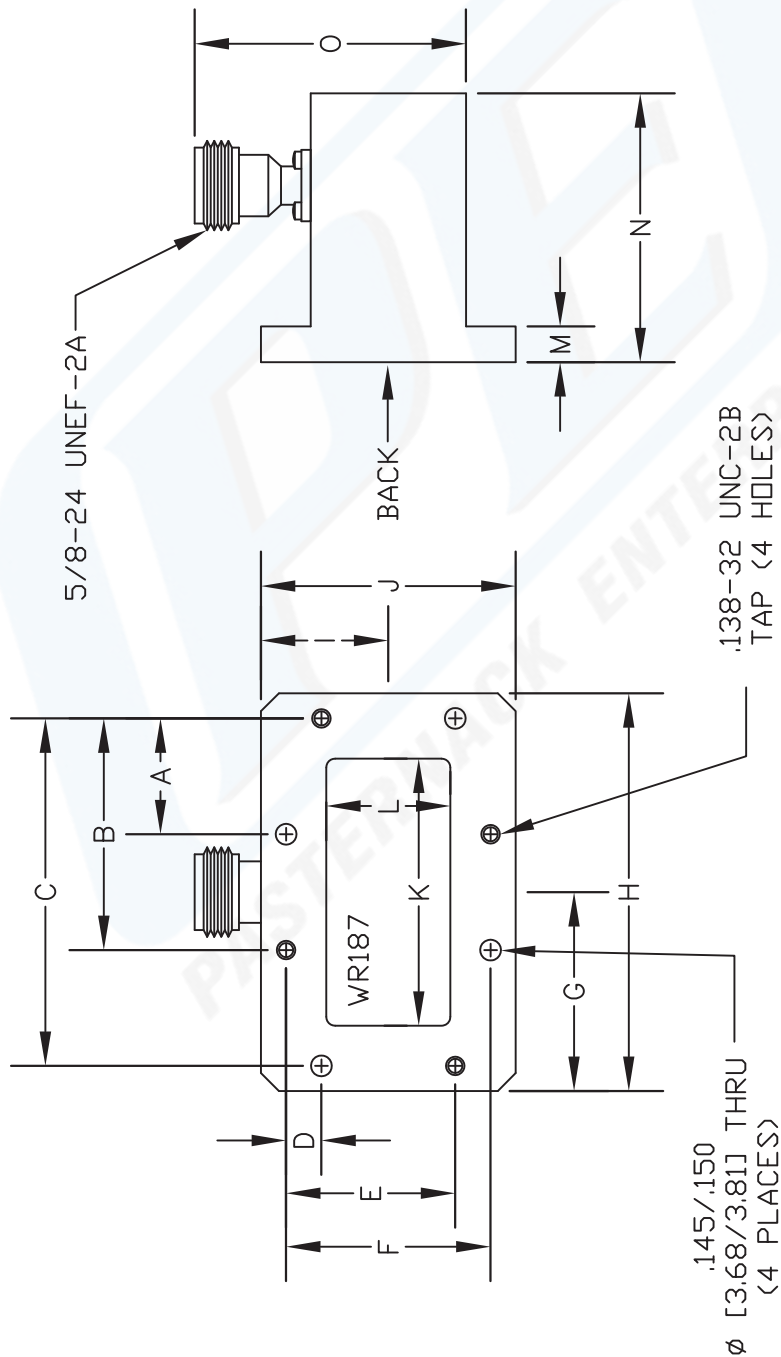

NOTES:
 1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
 2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
 3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE
PE9822

PASTERNAK ENTERPRISES, INC.
 P.O. BOX 16759, IRVINE, CA 92623
 PHONE (949) 261-1920 FAX (949) 261-7451
 WEB ADDRESS: www.pasternack.com
 E-MAIL ADDRESS: sales@pasternack.com
COAXIAL & FIBER OPTICS



127

SIZE A

SCALE N/A

CAD FILE 080504

FSCM NO. 53919

REV. -