

10 MM Stepper Motor with Gearhead


COBHAM

PN 16239



2016 Data Sheet

The most important thing we build is trust

Specification	16239	16240	Units	Basis
Gear Ratio	16:1	256:1	ratio	by design
Output Step Angle	1.875	0.12	degrees	nominal
Running Torque	1.1	13.5	in-oz	nominal
Holding Torque	1.47	18.4	in-oz	nominal
Unpowered Torque	0.3	6	in-oz	nominal
Backlash	0.5	0.5	degrees	maximum
Weight	0.32	0.35	ounces	nominal

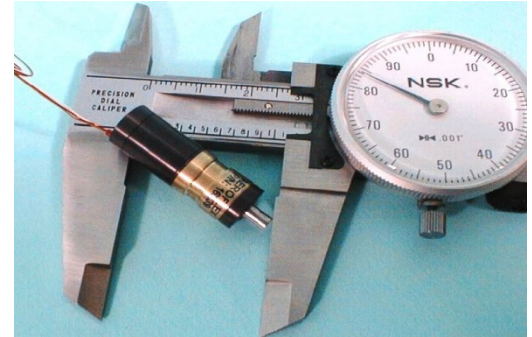

Specification	Value	Units	Basis
Step Angle	30	degrees	nominal
Step Rate	100	pps	maximum
Voltage	2.2	volts DC	maximum
Power	3	watts	maximum
Phase Resistance	9	ohms	nominal
Phase Inductance	100	μ H	nominal
Phases/Poles	$\frac{3}{4}$	phases/poles	by design
Redundant Windings	no	windings	by design

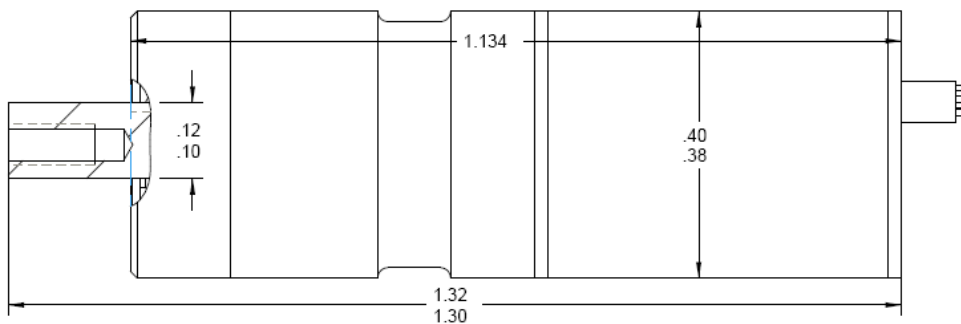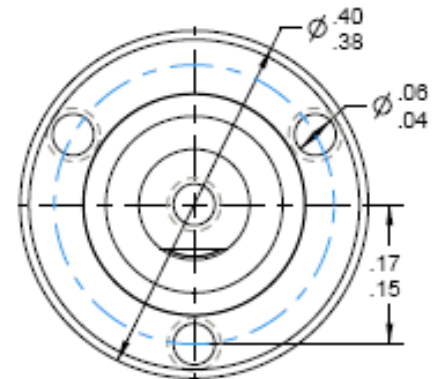

Cobham Advanced Electronic Solutions

Integrated Electronic Solutions

Tel: 1.631.231.9100

Email: motion.sales@cobham.com

www.cobham.com