proper Crimp adjustment

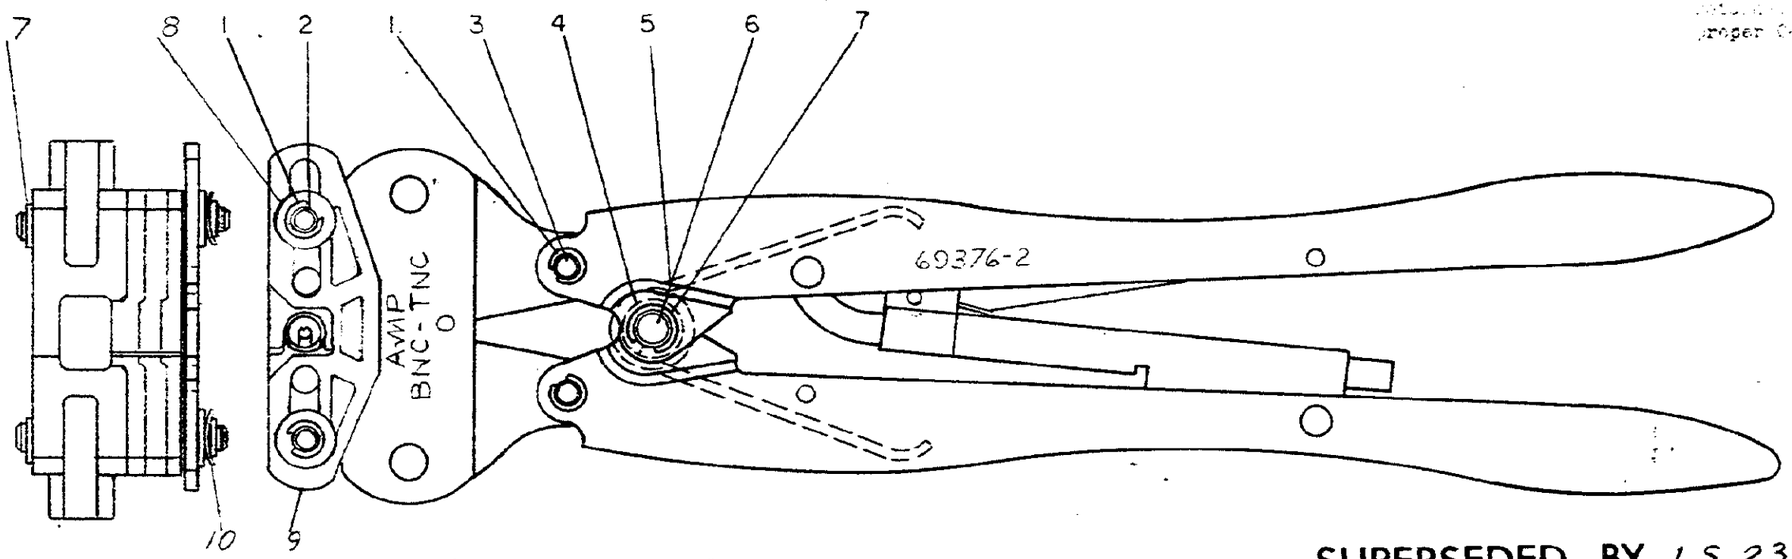

SUPERSEDED BY LS 2349

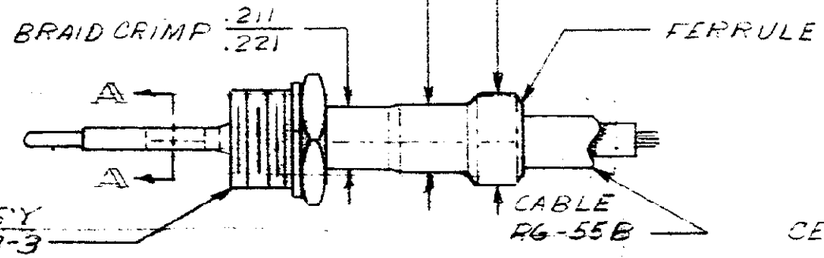

METHOD OF GAGING CRIMP DIMS

THE CRIMP DIMS APPLY ONLY TO THE ABOVE COMBINATIONS ON A CRIMPED PRODUCT.



CENTER CONTACT CRIMP SECTION A-A

2		24058-6	CURVED WASHER	10
1		307089-2	LOCATOR	9
2		125115-1	WASHER	8
4		21045-6	RING - RETAINING	7
1		300449	PIN - RETAINING	6
1		39364	SPRING	5
1		39366	COLLAR	4
2		58123	PIN - RETAINING	3
2		1-306055-3	PIN - RETAINING	2
6		21045-3	RING - RETAINING	1
-2	DWG SIZE	NUMBER	NAME	REMARKS

LTR	REVISION RECORD	DR	CHK	DATE
F	SUP BY L.S. 2349	E.W.F.	C.W.F.	3-20-72
E	REVISED	PL		3-1-71
D	REVISED	BS	E.W.F.	1-21-71
C	REVISED	PL	E.W.F.	1-25-69
B	REVISED	PL	E.W.F.	2-5-69
A	REVISED	BS	RJ	8-4-67

NUMBER 69376-2

REQUIRED PER ASSEMBLY

DESCRIPTION

©1967 BY AMP INCORPORATED. ALL RIGHTS RESERVED
AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING

CUSTOMER COPY REFERENCE ONLY

DR C.J. Flaymik 3-16-67

CHK R.F. Jaeger 3-29-67

DE

APP E.W. Fink 4-10-67

MATERIAL AND FINISH

WIRE - RANGE - INSULATION RG-55 B/U

TOLERANCE EXCEPT AS NOTED ± .015 ± 1°0

SCALE 1-1

AMP INCORPORATED HARRISBURG PENNA

CLASS

TYPE BNC-TNC

LOC M B NO 69376-2 REV F

NAME HAND TOOL ASSEMBLY

PRINT DWG 69376-2 REV F

DIMENSIONS IN INCHES UNLESS OTHERWISE NOTED

F.1

18