

KR Electronics, Inc.

General Description


KR Electronics part number 3254-32-LP is a 32 MHz lowpass filter. Other cutoff frequencies are available. Please consult the factory.

Features

- 32 MHz Lowpass Filter
- < 1 dB typical at 32 MHz
- Selective Elliptic Type
- 60 dB min at 50 MHz
- 50 Ω Source and Load
- Surface Mount -
- Available with SMA Connectors
- Other frequencies available

Typical Performance

Overall Response (10 dB/div)

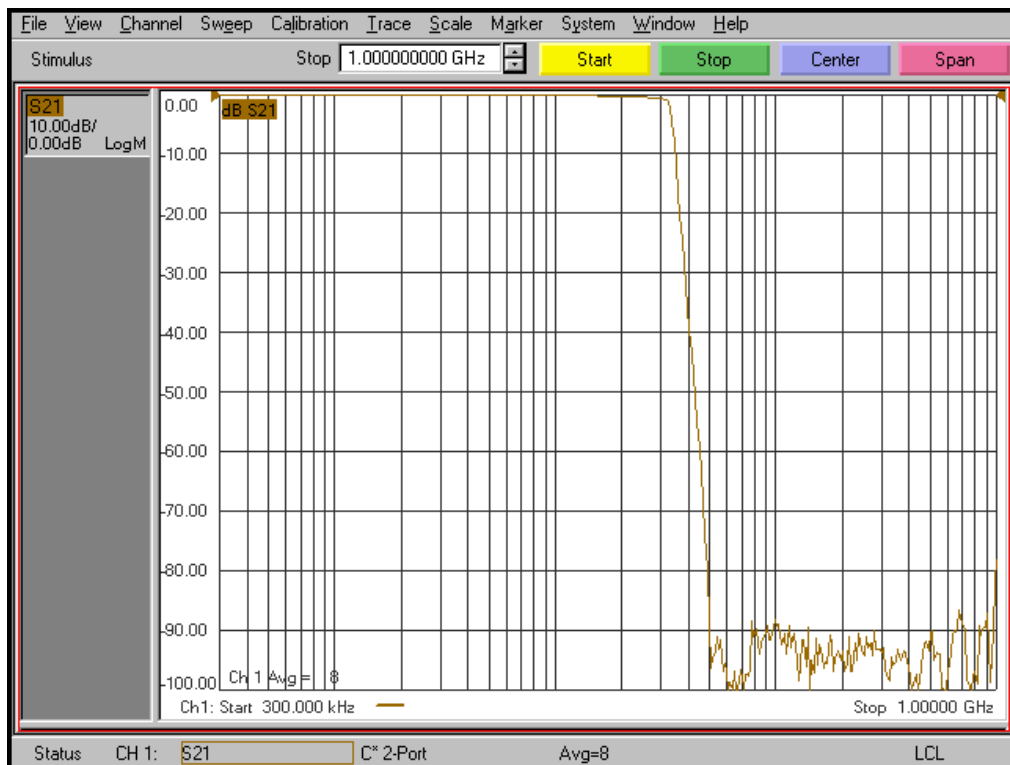


KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001

Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3254-32-LP

Passband Amplitude & Group Delay (1 dB/div & 50 nsec/div)

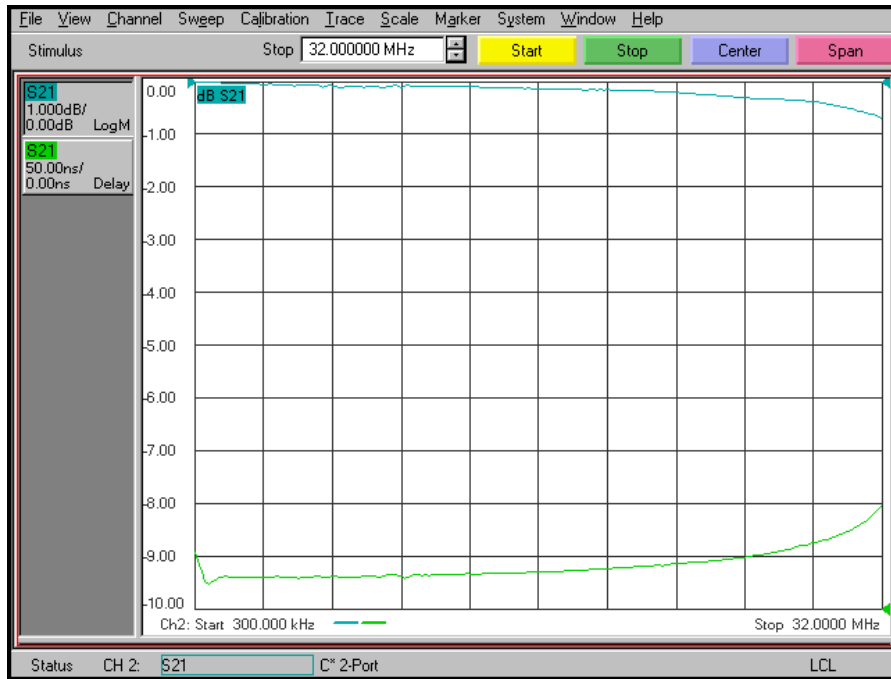

Overall Response (10 dB/div)



KR Electronics, Inc.
91 Avenel Street
Avenel, NJ 07001


Web www.krfilters.com
Email sales@krfilters.com
Phone (732) 636-1900
Fax (732) 636-1982

KR Electronics 3254-32-LP

Specifications

Parameter	Specification	
Filter type	Lowpass	
Attenuation at 32 MHz	1.5 dB max	< 1 dB typical
Attenuation 50 to 1000 MHz	60 dB min	>80 dB to 1000 MHz typical
Source and Load	50 Ω	

Physical Dimensions

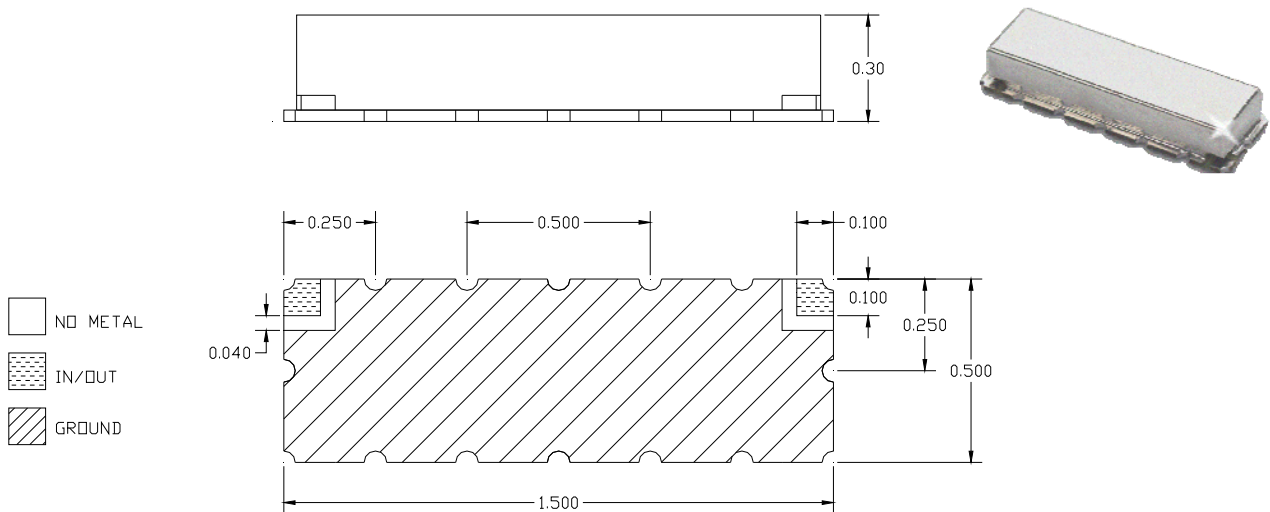

Notes:

1. Surface mount package
2. Dimensions in inches
3. Max reflow temperature 230° C for 10 sec
4. If boards are cleaned after installation units must be completely dried