


# Pressurizing Transformers CKT Series

Coils, Filters

## C5-KT2.2L

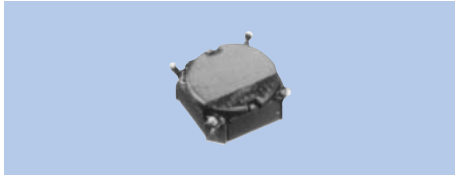


**Specifications**

- (1) -
- (2) 10~1000kHz
- (3) 0.7W


**Features**

- SMD
- 2000pcs./Reel

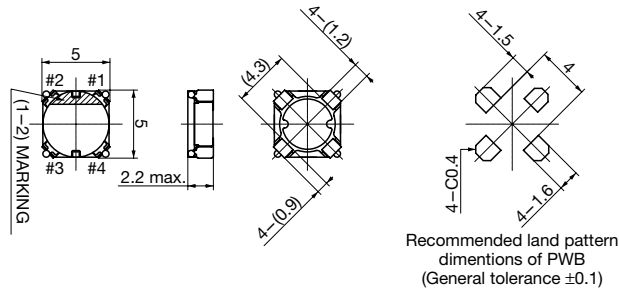

Recommended land pattern dimensions of PWB (General tolerance  $\pm 0.1$ )

## C5-KT2.5L

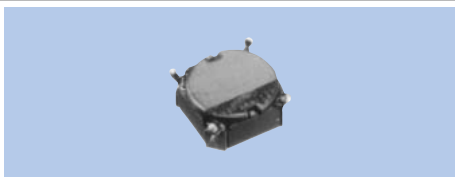


**Specifications**

- (1) -
- (2) 10~1000kHz
- (3) 0.8W

**Features**

- SMD
- 2000pcs./Reel

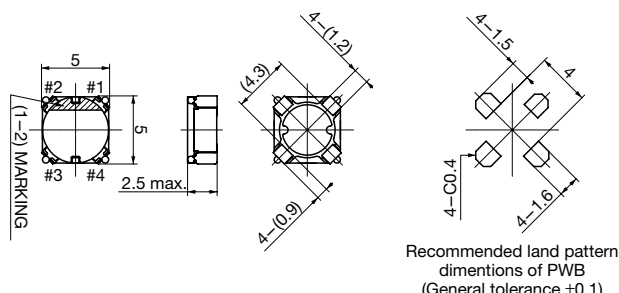

Recommended land pattern dimensions of PWB (General tolerance  $\pm 0.1$ )

## C5-KT3L




**Specifications**

- (1) -
- (2) 10~1000kHz
- (3) 1W


**Features**

- SMD
- 2000pcs./Reel

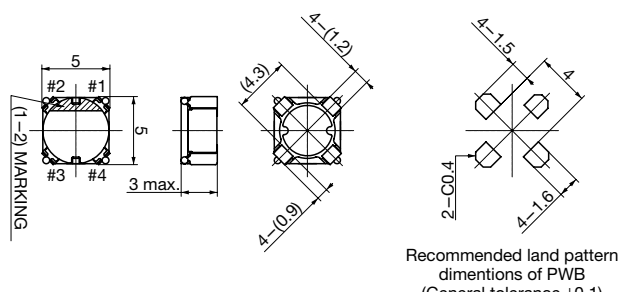

Recommended land pattern dimensions of PWB (General tolerance  $\pm 0.1$ )

## C6-KT2L

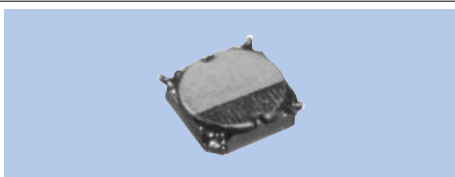


**Specifications**

- (1) -
- (2) 10~1000kHz
- (3) 0.8W


**Features**

- SMD
- 1000pcs./Reel

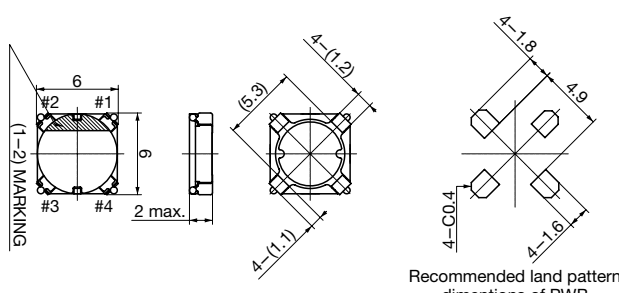

Recommended land pattern dimensions of PWB (General tolerance  $\pm 0.1$ )

## C6-KT3L

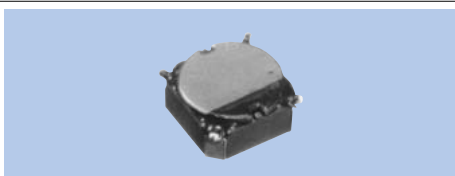


**Specifications**

- (1) -
- (2) 10~1000kHz
- (3) 1.2W

**Features**

- SMD
- 1000pcs./Reel

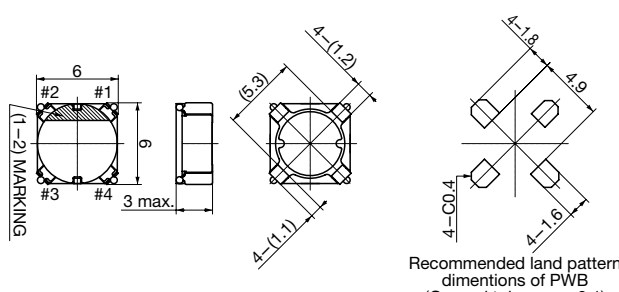

Recommended land pattern dimensions of PWB (General tolerance  $\pm 0.1$ )

- (1) Inductance
- (2) Operational frequency
- (3) Power Capacity