
HAND FLEX™

COAXIAL CABLES

Designer's Kit KHFC-1+

SPEED UP
THE SOLUTION!

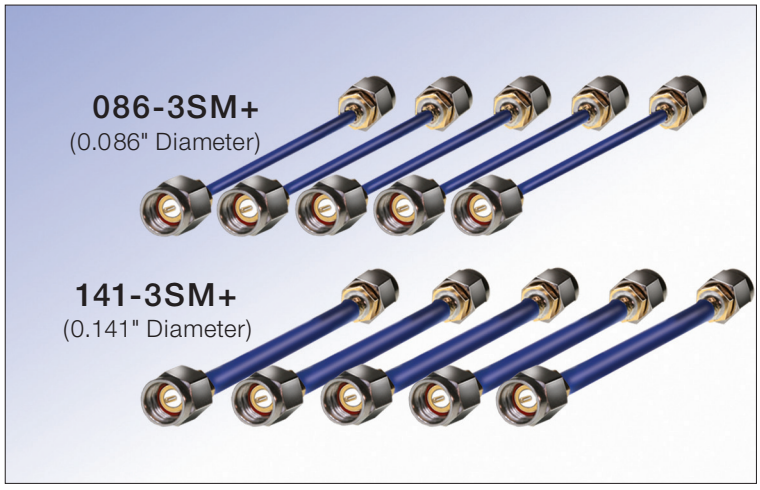

DC to 18 GHz

Features

- Hand Formable
- Robust
- Tight Bend Radius
  - 086-3SM+ 30 mm radius Min.
  - 141-3SM+ 40 mm radius Min.
- Excellent Return Loss
- Excellent Insertion Loss
- Very Low Cost

Typical Bending Capability



RoHS compliant

only $79.95 ea. kit (Kit includes 5 of each model, total 10 pieces)

Kit KHFC-1+ Electrical specifications of each model

Model[1] No.	Freq. (GHz) f_L-f_U	Length[2] (inch)	Insertion Loss (dB)								Return Loss (dB)							
			DC-2 GHz		2-6 GHz		6-10 GHz		10-18 GHz		DC-2 GHz		2-6 GHz		6-10 GHz		10-18 GHz	
			Typ.	Max	Typ.	Max	Typ.	Max	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min	Typ.	Min.
086-3SM+	DC-18	3	0.04	0.22	0.14	0.40	0.20	0.52	0.31	0.71	49	23	37	23	33	17	27	16
141-3SM+	DC-18	3	0.07	0.15	0.08	0.27	0.23	0.36	0.21	0.49	56	23	41	23	38	17	37	17

1. Unjacketed cable also available upon request.
2. Custom sizes available, consult factory.

Mini-Circuits®

www.minicircuits.com P.O. Box 35166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. OR
M129538
KHFC-1+