

# Product data sheet

## Characteristics

# 2601AG2

Switch, reversing drum, 2 HP at 230 V AC single phase, 2 HP at 575 V AC polyphase, handle operated, NEMA 1 enclosure

Product availability : Stock - Normally stocked in distribution facility



Price\* : 207.91 USD



### Main

Product	Reversing Drum Switch
Enclosure Rating	NEMA 1
Horsepower	1.5 hp 115 V AC, 1 phase 2 hp 230 V AC, 1 phase 2 hp 200 V AC, 3 phase 2 hp 230 V AC, 3 phase 2 hp 460 V AC, 3 phase 2 hp 575 V AC, 3 phase 0.25 hp 115 V DC 0.25 hp 230 V DC
Maximum Rated Voltage	600 V AC 250 V DC
Number of Poles	3P

### Complementary

Certifications	UL Listed CSA
Electrical Connection	Screw-clamp terminals
Type	A
Width	2.68 in (68.07 mm)
Height	5.38 in (136.65 mm)
Depth	4.61 in (117.09 mm)
Product weight	1.34 lb(US) (0.61 kg)

### Ordering and shipping details

Category	21116 - 2601
----------	--------------

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Discount Schedule	CP1
GTIN	00785901555414
Nbr. of units in pkg.	1
Package weight(Lbs)	1.25 lb(US) (0.57 kg)
Returnability	Yes
Country of origin	MX

### Packing Units

Package 1 Height	4.60 in (11.684 cm)
Package 1 width	5.50 in (13.970 cm)
Package 1 Length	7.10 in (18.034 cm)


### Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.

### Contractual warranty


Warranty	18 months
----------	-----------

Approximate Dimensions

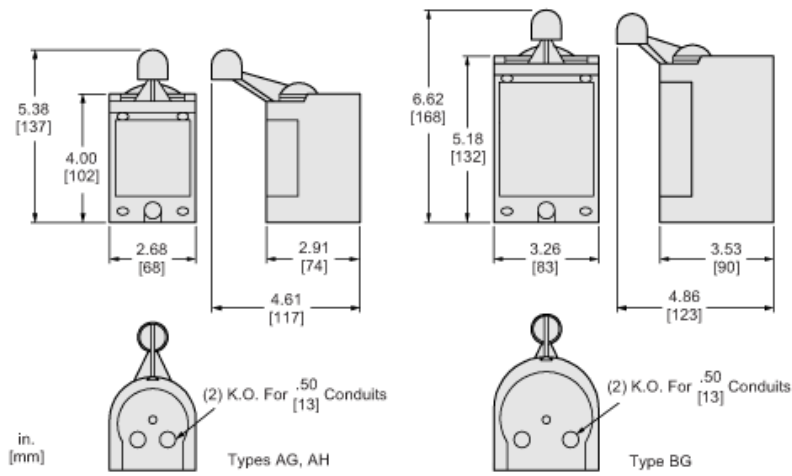

Connections and Wiring Diagrams

Internal Switching

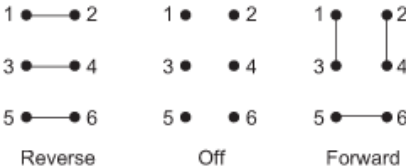

Three-Phase Wiring Diagram

