


# Leaded Common Mode Chokes – BCB Series

## BCB Series


High Speed Data Line Filters

BCB0603RI-4R4-N

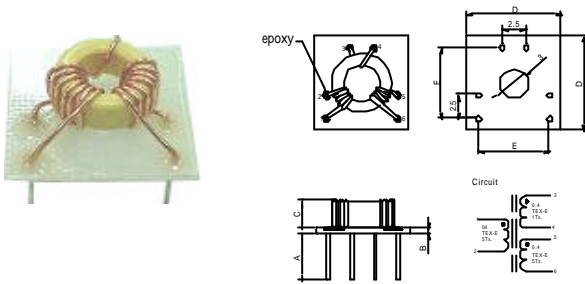


Dim (mm)	A	B	C	D	E
	5.0 ±1.0	0.5 ±0.05	6.0 <sup>+0</sup>	10 ±0.5	7.5 ±0.5
Spec	L(1-2)(μ H)		L(3-4)(μ H)		L(5-6)(μ H)
	3.54~5.53		0.141~0.52		3.6~6.53

BCB1104RI-330-N

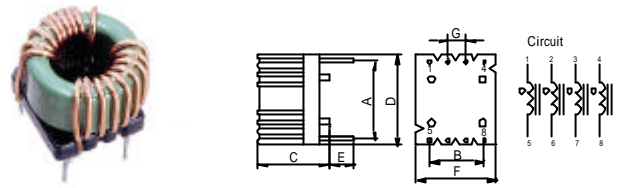


Dim (mm)	A	B	C	D	E	F	G
	10.8 ±0.5	7.62 ±0.5	8.89 <sup>+0</sup>	12.45 ±0.5	3.5 ±0.5	10.92 ±0.5	2.5 ±0.15
Spec	L(μ H) @100KHz		LK(μ H) @1KHz	RDC ( )	Interwinding Capacitance (p F)		
	25~50		1 <sup>+0</sup>	0.07 <sup>+0</sup>	30 <sup>+0</sup>		

BCB1306RI-221-N

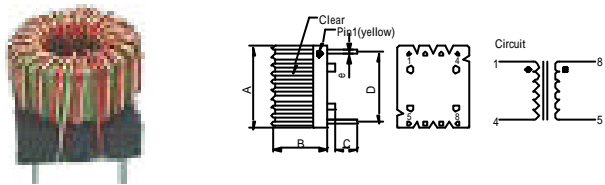

Dim (mm)	A	B	C	D	E
	16.0 <sup>+0</sup>	12.7 <sup>+0</sup>	3.48 ±0.5	10.8 ±0.5	0.65
Spec	L(μ H) @ 1KHz 1V		RDC (m )		
	220 ±30%		25 <sup>+0</sup>		

BCB1306RI-221-N

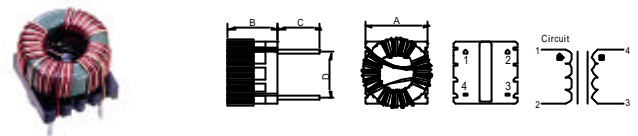

Dim (mm)	A	B	C	D
	15 <sup>+0</sup>	12 <sup>+0</sup>	3.5 ±1	7.8 ±0.2
Spec	L (mH)	RDC ( )	Hi-Pot (V)(AC&DC)	
	1.5 <sup>0</sup>	0.11	650	