
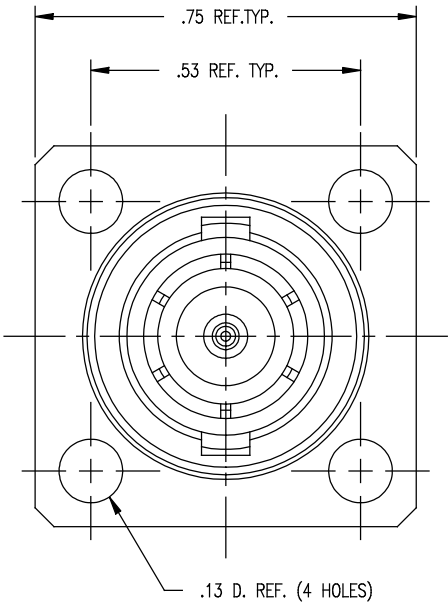


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

KC-79-51

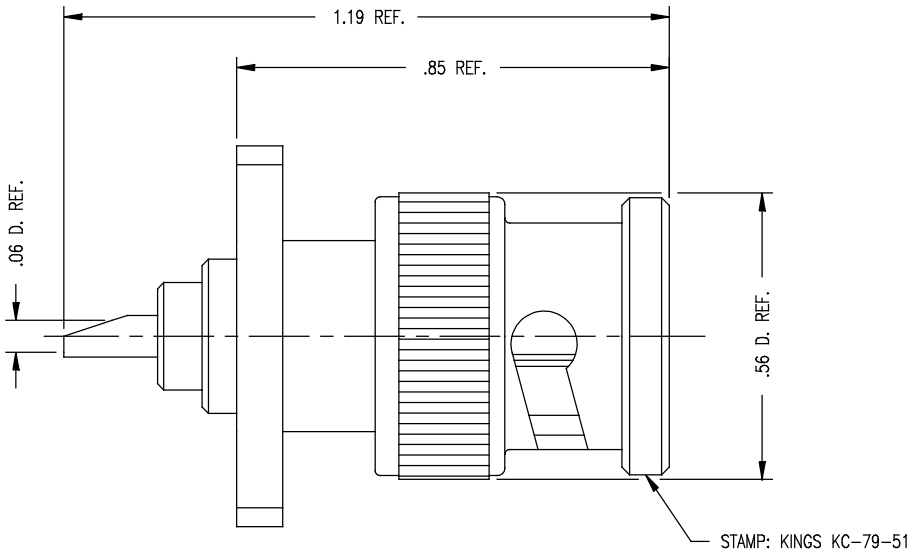

- NOTES:
1. INTERFACE PER MIL-STD-348, FIG. 301-1.
 2. MATERIALS:
INSULATOR: TEFLON, ASTM-D-1457
GASKET: SILICONE RUBBER, ZZ-R-765
OUTER CONTACT }
SPRING WASHER } BER. COPPER, ASTM-B-196
ALL OTHER METAL PARTS: BRASS, QQ-B-626
 3. FINISHES:
SPRING WASHER: SILVER PLATE, QQ-S-365
CENTER CONTACT: HARD GOLD PLATE, PER MIL-G-45204
ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
 4. ELECTRICAL CHARACTERISTICS:
NOMINAL IMPEDANCE: 50 OHMS
WORKING VOLTAGE: 500 VRMS
FREQUENCY RANGE: DC TO 4 GHz.

GSD

REVISIONS	
ISSUE	CHANGES
8	CN 32975 C REDRAWN WJM 05/16/91
WJM1058	
SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF:	
RECEPTACLE, PANEL, BNC, M	
DRAWN WJM	DATE 05/16/91
DESIGN LJ	DATE 05/23/91
APPR.	DATE
 KINGS ELECTRONICS CO., INC. TUCKAHOE, NEW YORK 10707	
KC-79-51	