
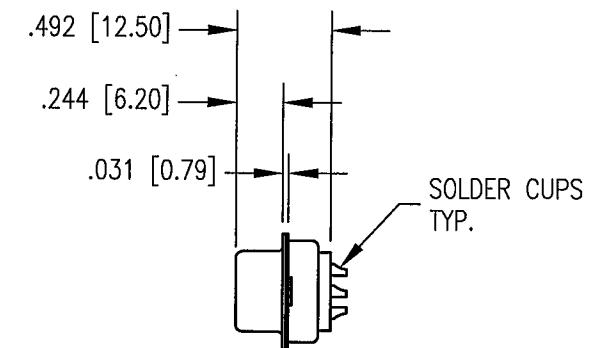
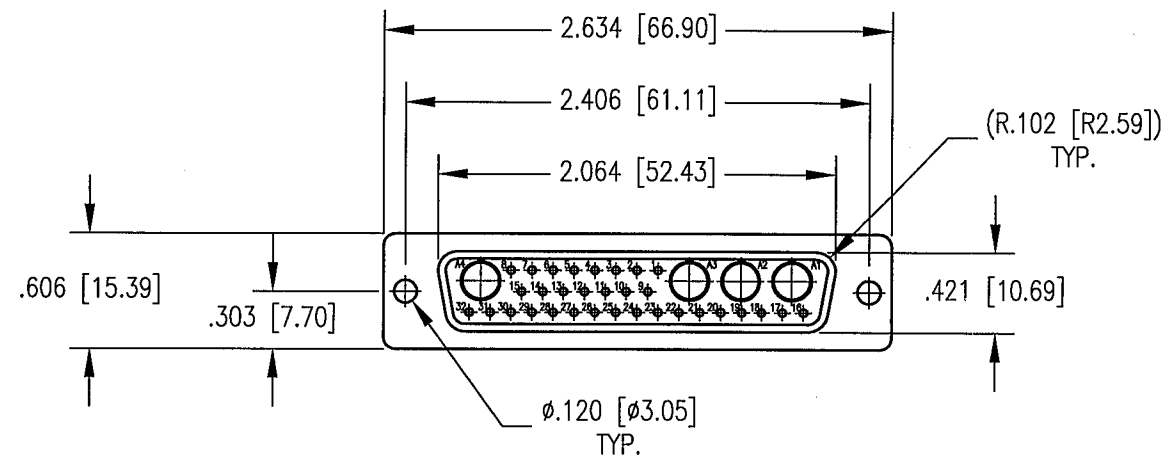


DWG. NO.		RM36W4S-50-ZB	
REV	DESCRIPTION	BY DATE	APPROVED
A	RELEASE PER ECR 7489	JWH 9/25/02	9/25/02

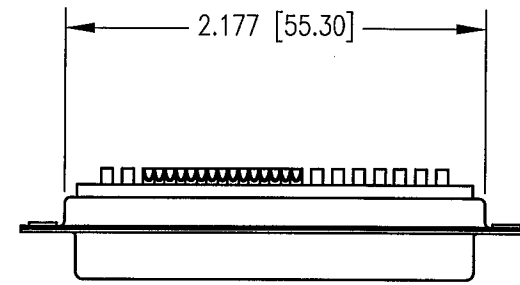

NOTES:

1. MATERIALS:

SHELL: COLD ROLLED STEEL PER ASTM A568
 INSULATOR: GLASS FILLED POLYESTER
 SIGNAL CONTACTS: COPPER ALLOY

2. FINISH:

SHELL: YELLOW CHROMATE OVER ZINC PER ASTM B633
 SIGNAL CONTACTS: .000030 MIN. GOLD PER MIL-G-45204 OVER
 .000050 MIN. NICKEL PER QQ-N-290
 INSULATOR: GREEN

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES OR INCHES/MM TOLERANCES: .XX ± .01 [0.254] .XXX ± .005 [0.127] ANGLES ± 2° SCALE: 1:1		NORTHROP GRUMMAN Winchester Electronics 400 Park Road Watertown, CT 06795	
CUSTOMER DRAWING		TITLE 36W4S D-SUB CONNECTOR	
DRAWN JWH	DATE 9/25/02	CHECKED [Signature]	DATE 9/27/02
APPROVED [Signature]	DATE 9/26/02	APPROVED [Signature]	DATE 9/26/02
A RM36W4S-50-ZB		SHT. 1 OF 1	REV. A