


DWG. NO.	RM3W3P-1023		
REV	DESCRIPTION	BY DATE	APPD
C	ECR 6890	MM 10/13/01	

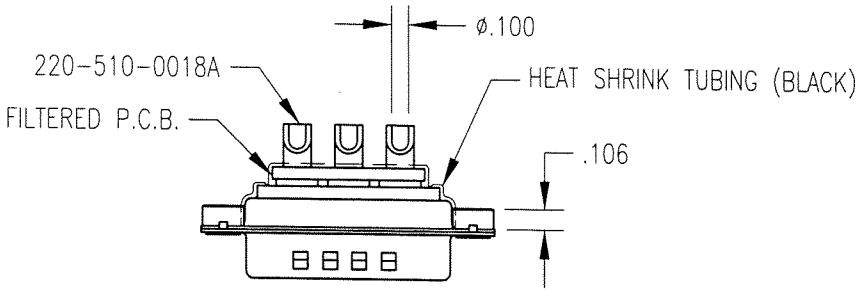

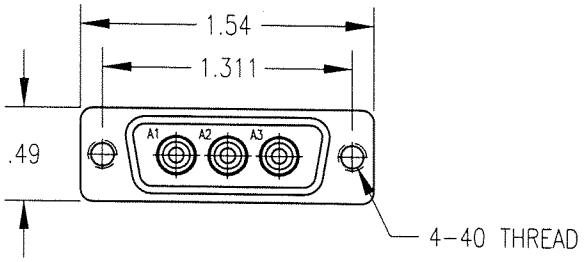

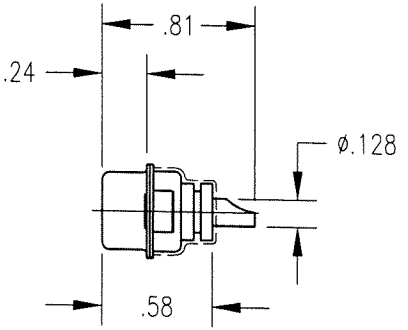

NOTES:

1. MATERIALS:
   - SHELLS: COLD ROLLED STEEL PER ASTM A568
   - INSULATORS: GLASS FILLED POLYESTER
   - P.C.B.: FR-4, .062 THICK
   - CLINCH NUTS: BRASS PER ASTM B16
   - FOR POWER CONTACT SPECIFICATIONS SEE CONTACT SALES DRAWING
2. FINISH:
   - SHELLS AND CLINCH NUTS: TIN PLATED PER ASTM B545
   - INSULATOR: GREEN
   - FOR POWER CONTACT SPECIFICATIONS SEE CONTACT SALES DRAWING
3. POWER CONTACTS FILTERED WITH A 10 NF CAPACITIVE ELEMENT.
4. UNDERWRITER'S LABORATORIES INC. AUTHORIZATION: RECOGNIZED, FILE E31650
   25 AMP, 48V VDC, WIRE RANGE 12-14 AWG.

PER ASME Y14.5M-1994
UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES [MM]
TOLERANCES:
DECIMALS .xx ± .01/0.254
xxx ± .005/0.127
ANGLES ± 2°
SCALE: 1:1

Litton
Winchester/Retconn
400 Pork Road
Watertown, Connecticut 06795

CUSTOMER DRAWING

TITLE: 3W3P D-SUB HOUSING WITH FILTERED POWER CONTACTS

DRAWN	DATE	CHECKED	DATE
KJT	06/02/00	JH	06/06/00
APPROVED	DATE	APPROVED	DATE
JMC	06/06/00	JFD	06/06/00

SIZE	DWG. NO.	SHT.	OF	REV.
A	RM3W3P-1023	1	1	C

June 2006 - This drawing became the property of Winchester Electronics Corporation, Wallingford, CT.