



### 1. CONFIGURATION & DIMENSIONS :

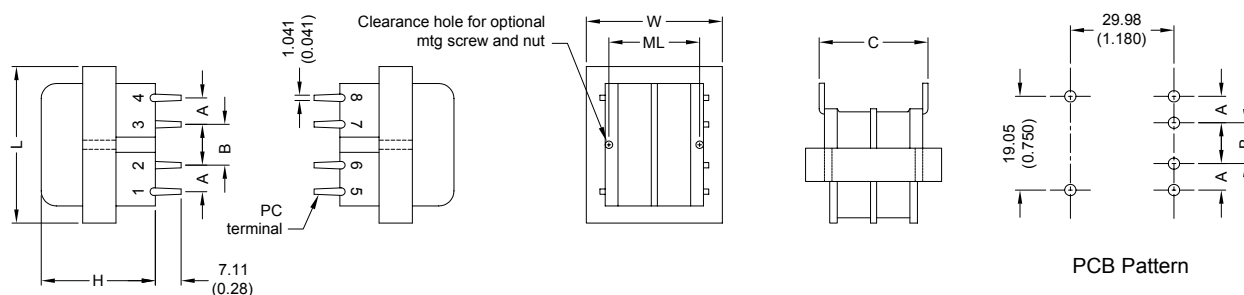

UNIT : mm (inch)

| SIZE | VA  | L               | W                | H               | ML   | A              | B              | C                | Optional mtg. screw & nut* | gram |
|------|-----|-----------------|------------------|-----------------|------|----------------|----------------|------------------|----------------------------|------|
| 3    | 2.4 | 35.50<br>(1.40) | 30.00<br>(1.180) | 30.50<br>(1.20) | ---- | 6.35<br>(.250) | 6.35<br>(.250) | 30.48<br>(1.200) | None                       | 110  |

### 2. SCHEMATIC :



### 3. ELECTRICAL CHARACTERISTICS ( @ 25°C ) :

|                                      |                                            |
|--------------------------------------|--------------------------------------------|
| a. Primary Voltage                   | AC 115 V 60 Hz .                           |
| b. No Load Primary Current           | Less Than 15mA .                           |
| c. Secondary Voltage (±5%)           | Series AC 21.40V .<br>Parallel AC 10.70V . |
| d. Secondary Load Current            | Series 0.15A .<br>Parallel 0.30A .         |
| e. Full Load Primary Current         | Less Than 40mA .                           |
| f. Full Load Secondary Voltage (±5%) | Series 16.00V .<br>Parallel 8.00V .        |
| g. DC Resistance                     |                                            |
| Pin 1-4                              | Primary = 416 Ohm .                        |
| Pin 5-6                              | Secondary = 6.29 Ohm .                     |
| Pin 7-8                              | = 7.81 Ohm .                               |
| h. Insulation Resistance             | DC 500V 100Meg Ohm Of More .               |
| i. Withstand Voltage (Hi-Pot)        | AC 2500V 60Hz 1 Minutes .                  |
| j. Temperature Rise                  | Less Than 60 Deg C .                       |
| k. Core Size                         | EI-35 x 14.00 m/m .                        |



**RoHS Compliant**

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



**SUPERWORLD ELECTRONICS (S) PTE LTD**