

Customer Information Sheet

SPECIFICATIONS:

MATERIAL:

 MOULDING = GLASS-FILLED PPS,
 UL94V-0, BLACK

 CONTACT = PHOSPHOR BRONZE

 JACKSCREW = STAINLESS STEEL

FINISH (CONTACTS):

 22 = 0.75µ GOLD ON CONTACT AREA,
 3µ 90/10 TIN/LEAD ON TAILS

 42 = 0.75µ GOLD ON CONTACT AREA,
 3µ 100% TIN OVER NICKEL ON TAILS

 05 = 0.75µ GOLD ALL OVER

ELECTRICAL:

 CURRENT RATING AT 25°C = 3.0A MAX

 CURRENT RATING AT 85°C = 2.2A MAX

 WORKING VOLTAGE = 800V AC/DC

 VOLTAGE PROOF = 1200V AC/DC

 CONTACT RESISTANCE = 25 mΩ MAX

 INSULATION RESISTANCE = 100 MΩ MIN

MECHANICAL:

 DURABILITY = 500 OPERATIONS



ENVIRONMENTAL:

 TEMPERATURE RANGE = -55°C TO +125°C



PACKING:

 TUBE WITH FIXINGS IN ATTACHED BAG.

FOR COMPLETE SPECIFICATION, SEE
COMPONENT SPEC. C005XX (LATEST ISSUE)

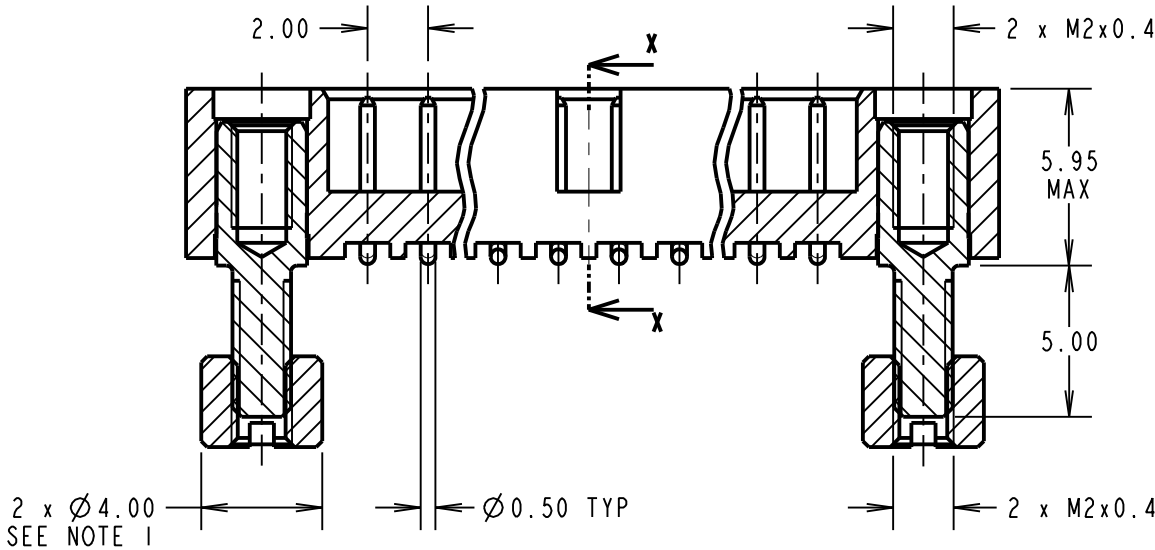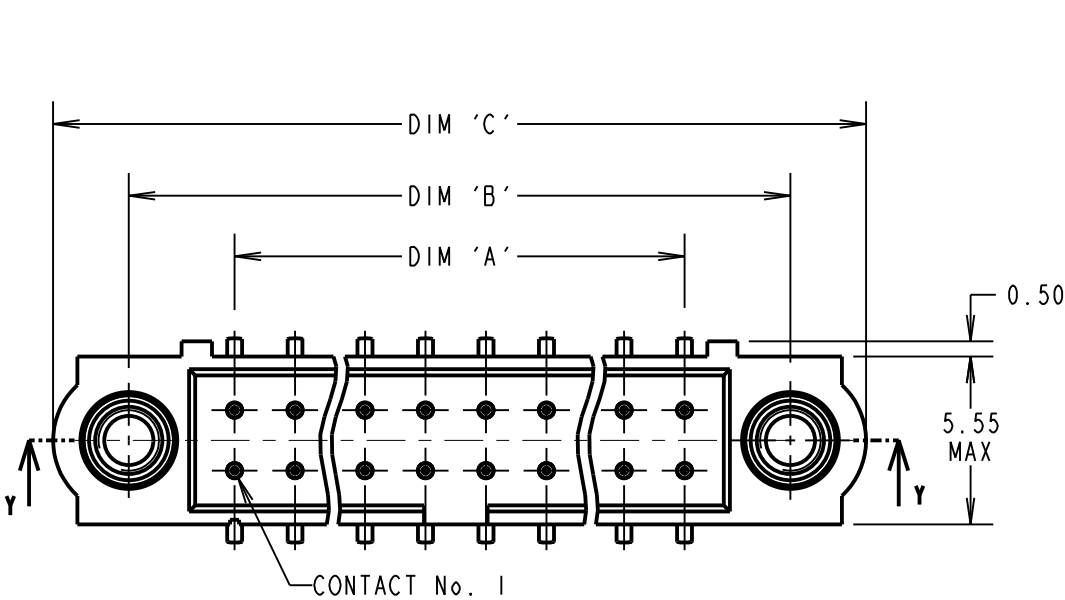

PART SECTION Y-Y

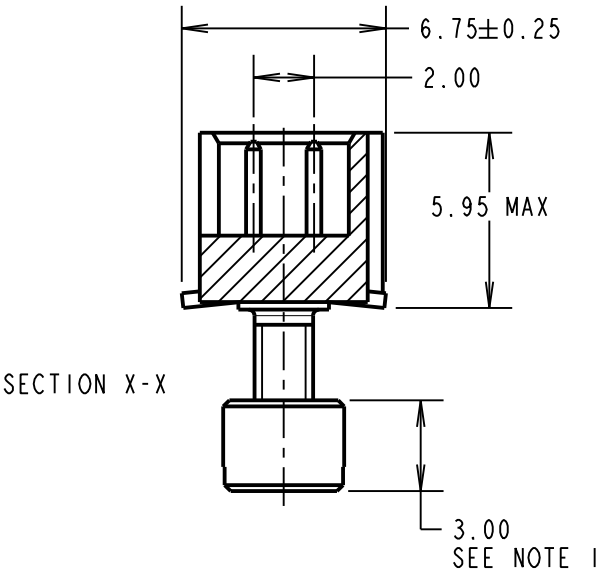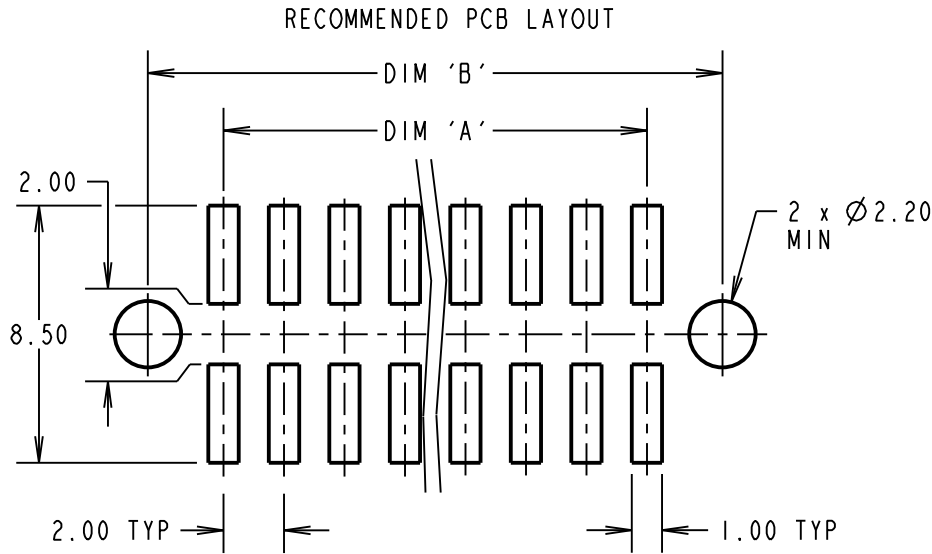

DIMENSION	CALCULATION
DIM 'A'	TOTAL No. OF CONTACTS - 2
DIM 'B'	TOTAL No. OF CONTACTS + 5
DIM 'C'	TOTAL No. OF CONTACTS + 10
EXAMPLE: CONNECTOR WITH 20 CONTACTS, GOLD ON CONTACT AREA AND 100% TIN ON TAIL, M80-5132042.	
DIM 'A' = 18.00mm, DIM 'B' = 25.00mm, DIM 'C' = 30.00mm	

NOTES:

1. CONNECTOR IS SUPPLIED WITH BOARD MOUNT NUTS NOT ASSEMBLED AS SHOWN. SUPPLIED LOOSE IN BAG ATTACHED TO PACKING TUBE.

ORDER CODE:

M80-513XXXX

TOTAL No. OF CONTACTS
04 TO 50
(EVEN NUMBERS ONLY)

FINISH

22 - GOLD ON CONTACT AREA / TIN/LEAD ON TAIL
42 - GOLD ON CONTACT AREA / 100% TIN ON TAIL
05 - ALL OVER GOLD

MSP	8	04.04.16	13302
NAME	ISS.	DATE	C/NOTE
APPROVED: M.PERREN			
CHECKED: M.PLESTED			
DRAWN: W. J. BOURNE			
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com

technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

X. = ±1mm

X.X = ±0.50mm

X.XX = ±0.10mm

X.XXX = ±0.01mm

ANGLES = ±5°

UNLESS STATED

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA: mm²

TITLE: DATAMATE J-TEK
MALE VERTICAL SMT ASSY
WITH 5mm BOARD MOUNT

DRAWING NUMBER: M80-513XXXX

SHT 2 OF 2