PART NO.	ENG. NO.	
02-06-1201	1787-(P901)	
02-06-1202	1787-(P901)L	
02-06-5205	1787-(P591)	
02-06-5206	1787-(P591)L	**OBSOLETE**
02-06-5201	1787-(P550)	
02-06-5202	1787-(P550)L	**OBSOLETE**

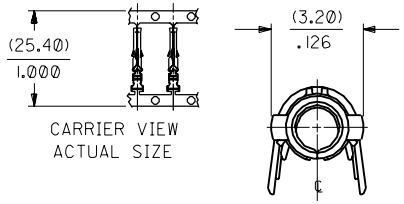



SECT. "B-B"

SCALE: 10X



SECT. "C-C"

SCALE: 10X

LEGEND

1787-(****)*

- P=PREPLATE / BLANK=POSTPLATE
- FINISH CODE
- FORM BLANK=CHAIN L=LOOSE

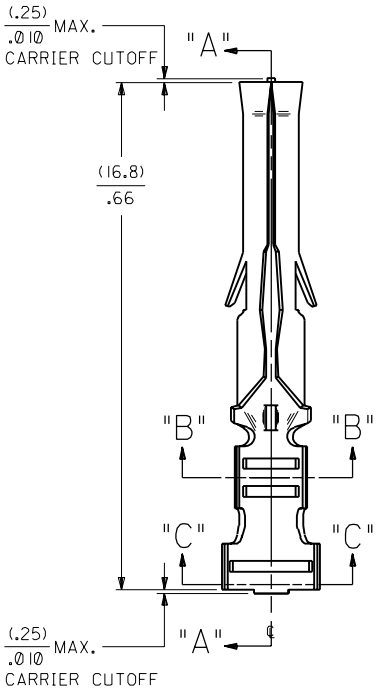

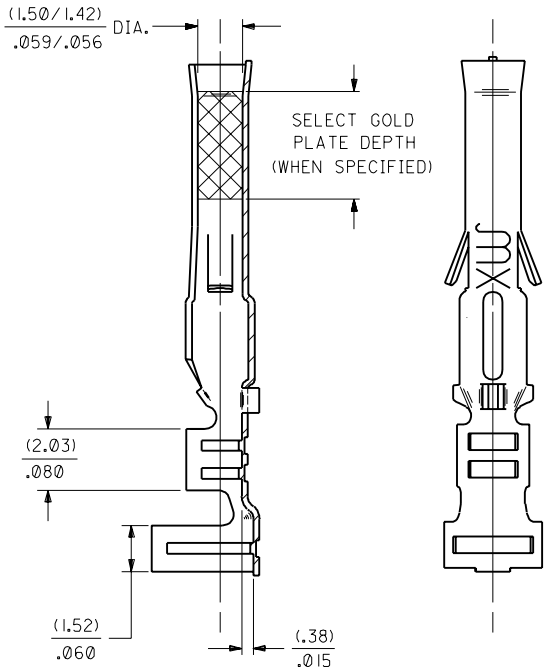

SECT. "A-A"

NOTES:

1. TERMINAL FOR USE WITH (1.57)/.062 DIA. SERIES HOUSINGS AND WILL ACCEPT 18 THRU 24 AWG WIRE WITH (1.52/3.05)/.060/.120 INSULATION DIA.
2. THIS PART CONFORMS TO PRODUCT SPEC. 02-06.

FINISH CODES:

901 HOT TIN DIP (.00051)/.000020 MIN.

591 SELECT GOLD PLATE (.00127)/.000050 MIN. IN CONTACT AREA, OVER (.00127)/.000050 MIN. NICKEL OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.

550 SELECT GOLD PLATE (.00038)/.000015 MIN. IN CONTACT AREA, OVER (.00076)/.000030 MIN. NICKEL OVERALL WITH (.00025)/.000010 MAX. GOLD FLASH OVERALL.

MATERIAL NOTE:

PHOSPHOR BRONZE, ALLOY #C51000, (.20)/.008 THICK, SPING TEMPER.

MFG.	SH.	REV.	LTR.	REVISIONS
		AN		OBSOLETE P/N UCR2002-0270 COMERCI 01/9/27
		AM1		OBSOLETE -(P558) & -(P558)L ECR U6 0358 GC 9/15/95 RW
		AM		REV. AND REDRAWN PER ECR 10372 GEP 6-17-87 RW

DIMENSIONS SHOWN (METRIC) INCH

UNLESS OTHERWISE SPECIFIED TOLERANCES: ANGULAR ± 1/2°

	INCH	METRIC
3 PLACE	± .010	---
2 PLACE	± .014	± 0.25
1 PLACE	---	± 0.35

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

▽ = 0 ▼ = 0 REVISE ONLY ON CAD SYSTEM

TITLE: CRIMP TERMINAL, FEMALE (1.57)/.062 DIA., PHOS. BRONZE FOR 18 THRU 24 GA. WIRE

MOLEX INCORPORATED LISLE, ILL. 60532 U.S.A.

SHEET NO. 1 OF 1 | DATE 9/17/87

PART NO. SEE CHART | DRWG. NO. SD-1787-*

DRWG. BY	CHK'D. BY	FILE NAME	DIV.	SIZE
GEP	RW	SD1787X1.DGN	CP	C
APP'D. BY: RAS	SCALE: 8 : 1			

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INC. AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

1787