


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

SD

8605-3-9

REVISIONS	
ISSUE	CHANGES
0	ER 39979 DRK 06/21/07

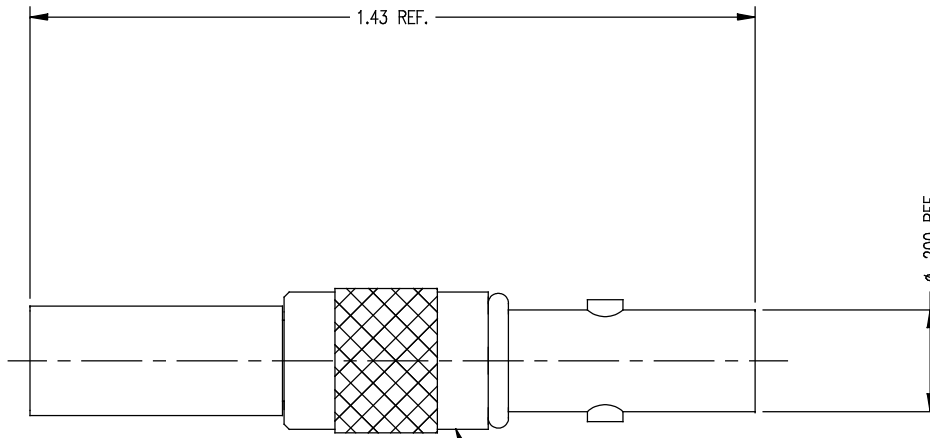

STAMP: KINGS 8605-3-9  
YRWK (DATE CODE)

NOTES:

- FOR USE WITH BELDEN 1855A & 1865A CABLES.
- FOR CRIMPING USE DIE KTH-2025.
- FOR CABLING INSTRUCTIONS SEE 3-661-6.
- CENTER CONTACT, 1-8892-1 MC9, AND K-GRIP SLEEVE 1-3983-1 M06 SUPPLIED USASSEMBLED.
- MATERIAL:  
INSULATOR- TEFLON, ASTM-D-4894  
GASKET- SILICONE RUBBER, ZZ-R-765  
ALL OTHER METAL PARTS- BRASS, ASTM-B16
- FINISHES:  
CENTER CONTACT- GOLD PLATED, PER MIL-G-45204  
ALL OTHER METAL PARTS- NICKEL PLATE PER QQ-N-290
- ELECTRICAL CHARACTERISTICS:  
NOMINAL IMPEDANCE- 75 OHMS  
WORKING VOLTAGE- 500 VRMS  
FREQUENCY RANGE- DC TO 2.4 GHz, -23 dB MAX.
- MARK PACKAGE: KINGS 8605-3-9  
YRWK (DATE CODE)

SCALE 4:1

APPROX SURFACE AREA

USED ON

REF:

A/V MINI PLUG

DRAWN DRK DATE 06/21/07

DESIGN DATE

APPR. DATE



8605-3-9

SD