

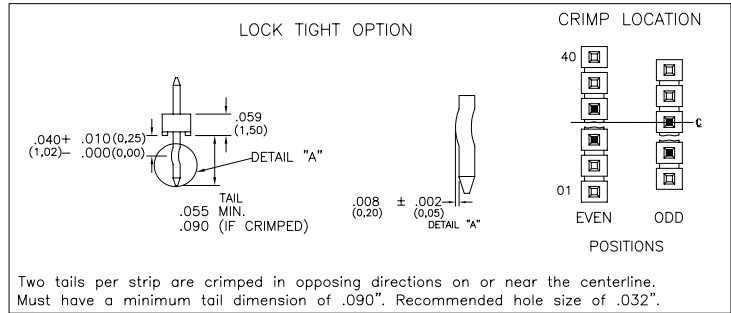


Major League Electronics .079 cl Terminal Strip Headers - Custom

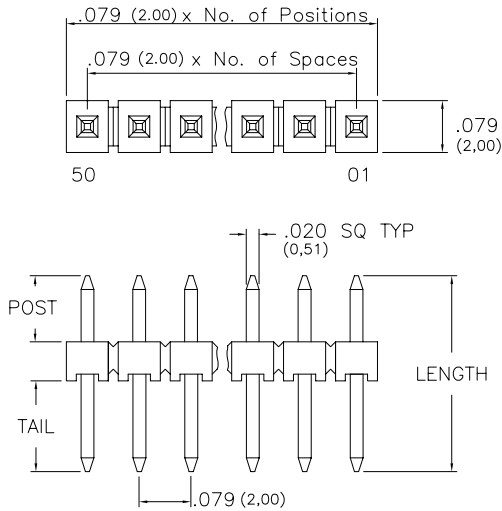

Tails may be clipped to achieve desired pin length

$$\text{Length (L)} - \text{Post Height (P)} - .059 (1.50) = \text{Tail Length (T)}$$

Ordering Information

TSHC-2 [XX] - S - [XX] - [XX] - [XX] - [XX] - [XX] - [XX] - LF

Pins Per Row: 01 - 40
 Row Specification: S = Single Row
 Lead Free

Pin Options			
Length	Max. Post Height		
.255	6.48mm	.115	2.92mm 01
.302	7.67mm	.162	4.11mm 02
.323	8.20mm	.183	4.65mm 03
.377	9.58mm	.237	6.02mm 04
.397	10.08mm	.257	6.53mm 06
.456	11.58mm	.316	8.03mm 07
.555	14.10mm	.415	10.54mm 08
.535	13.59mm	.395	10.03mm 09
.575	14.61mm	.435	11.05mm 10
.594	15.09mm	.454	11.53mm 12
.614	15.60mm	.474	12.04mm 14
.673	17.09mm	.533	13.54mm 15
.713	18.11mm	.573	14.55mm 16
.733	18.62mm	.593	15.06mm 17
.752	19.10mm	.612	15.54mm 18
.830	21.08mm	.690	17.53mm 22
.871	22.12mm	.731	18.57mm 24
.950	24.13mm	.810	20.57mm 28
1.110	28.19mm	.970	24.64mm 30
1.117	29.72mm	1.030	26.16mm 36

Polarized Position
 Leave blank if not needed
 If required, specify empty pin position, e.g. 012 for Pin 12

Lock Tight "LT" Option
 Leave blank if not needed
 LT = With

Plating Options	
G	10µ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10µ Gold on Contact Area / Matte Tin on Tail
H	30µ Gold on Contact Area / Matte Tin on Tail

Desired Post Height
 Please specify
 e.g. .100 (2.54) = 100

Specifications


- Current Rating: 2.0 Ampere
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 500V AC
- Contact Resistance: 20 mΩ Max.
- Operating Temperature: -40°C to + 105°C
- Max. Process Temperature:
 - Peak: 260°C up to 10 secs.
 - Process: 230°C up to 60 secs.
 - Wave: 260°C up to 6 secs.
 - Manual Solder: 350°C up to 5 secs.

Materials

- Contact Material: Phosphor Bronze
- Insulator Material: Nylon 6T
- Plating: Au or Sn over 50µ" (1.27) Ni

Products cut to specific sizes are uncancellable/nonreturnable

Parts are subject to change without notice



Mates with:
 SSHS,
 SSHR,
 SH,
 BSSH,
 BSSQ,
 SSHSM,
 SSHQ,
 SSHQR

TSHC-2-S SERIES

.079cl Single Row - Custom Terminal Strip Headers

20 FEB 07

Scale NTS

UNLESS OTHERWISE SPECIFIED DIMENSIONS IN INCHES (MM) TOLERANCES ARE:

ONE PLACE DECIMALS ±.100
 TWO PLACE DECIMALS ±.010
 THREE PLACE DECIMALS ±.005
 FOUR PLACE DECIMALS ±.0020
 ANGLES ±5°



4235 Earnings Way, New Albany, Indiana, 47150, USA
 1-800-782-3486 (USA/Canada/Mexico)

Tel: 812-944-7244
 Fax: 812-944-7268

E-mail: mle@mlelectronics.com
 Web: www.mlelectronics.com

Edition 1

Sheet 1/1