
This document was generated on 04/12/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0191930013
Status: Active
Description: VersaKrimp™ Ring Tongue Terminal for 18-22 AWG Wire

Documents:
Drawing (PDF) RoHS Certificate of Compliance (PDF)



Series image - Reference only

Agency Certification

CSA	LR18689
UL	E32244

General

Product Family	Ring and Spade Terminals
Series	19193
Crimp Quality Equipment	Yes
Mil-Spec	N/A
Product Name	VersaKrimp™
Type	Ring

Physical

Barrel Type	Closed - Brazed
Insulation	None
Material - Plating Mating	Tin
Packaging Type	Adhesive Tape on Reel
Stud Size	5-6 (M3-3.5)
Wire Size AWG	18, 20, 22
Wire Size mm²	0.35 - 0.80

Material Info

Old Part Number	AA-321-06T

Reference - Drawing Numbers

Sales Drawing	AACD30101

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.

Search Parts in this Series
19193Series

Application Tooling | **FAQ**

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
ATP Tooling Kit for ATP-100 and ATP-300 Series Air Crimping Press for Mylar Tape Mounted Terminals	0190270034
Mini-Mac™ Applicator	0638853800

This document was generated on 04/12/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

FILE NO. AA-CD-301-01

NOTES:

① MAT'L: COPPER
PLATING: ELECTRO-TIN (.0003 MIN.)

② BRAZED SEAM

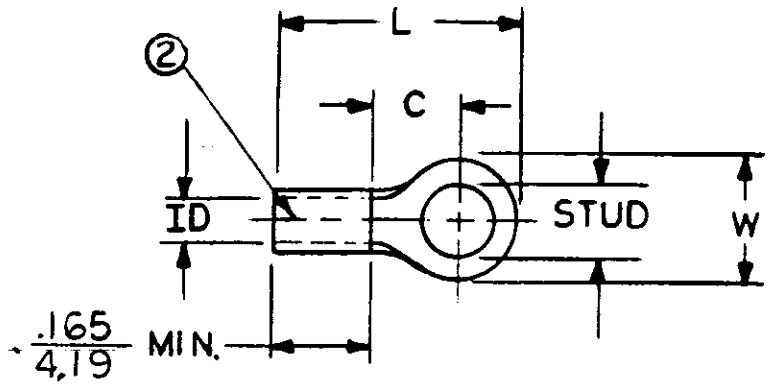

STUD SIZES: (±.005)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390
209 = .209

"UL" LISTING #E32244
"CSA" LISTING #18689

ALL DIMENSIONS = INCHES / MM

WIRE SIZE: 22-18 AWG / .25-1.5 MM²

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.			AVAILABLE STUD SIZES	STOCK THICKNESS	
AA-320-	.225 / 5.72	.157 / 3.99	.484 / 12.29	.062 / 1.57			02, 04, 06	.028 +.001 -.000 / .71	
AA-321-	.312 / 7.93	.270 / 6.86	.641 / 16.28	.062 / 1.57			06, 08, 10, 209	.028 +.001 -.000 / .71	
AA-322-	.467 / 11.86	.386 / 9.80	.835 / 21.21	.062 / 1.57			10, 14, 56	.028 +.001 -.000 / .71	
AA-326-	.534 / 13.56	.552 / 14.02	1.034 / 26.26	.054 / 1.37			10, 14, 56, 38	.031 ±.001 / .79	
AA-332-	.254 / 6.45	.240 / 6.10	.582 / 14.78	.062 / 1.57			04, 06, 08	.028 +.001 -.000 / .71	

DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED			REFERENCE	SCALE: NTS	DATE
FRAC.	DEC.	ANG.		DRWN. BY: JJ	11-27-84
±	±	±		CHKD. BY: GZ	11-30-84
				APPRD. BY:	

TITLE: RING TONGUE TERMINAL VERSAKRIMP 300-SERIES

ETC molex INCORPORATED

DWG. NO. A CUSTOMER DWG.