

## Han 2Mod agg

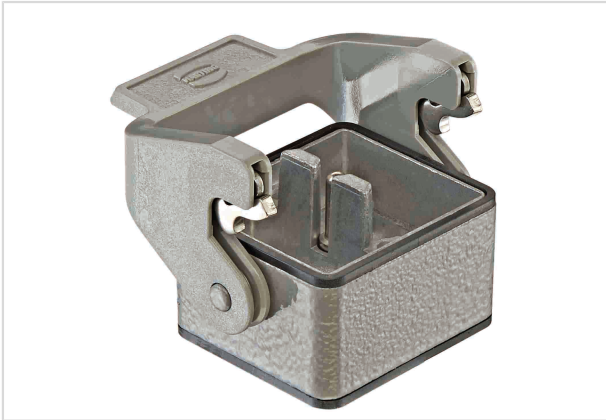


Image is for illustration purposes only. Please refer to product description.

Part number	09 14 002 0301
Specification	Han 2Mod agg
HARTING eCatalogue	<a href="https://b2b.harting.com/09140020301">https://b2b.harting.com/09140020301</a>

### Identification

Category	Hoods/Housings
Series of hoods/housings	Han-Modular® Twin
Type of hood/housing	Bulkhead mounted housing

### Version

Locking type	Single locking lever
Han-Easy Lock®	Yes
Size	Modular Twin

### Technical characteristics

Stripping length	10 mm PE contact
Tightening torque	1 Nm PE screw
Limiting temperature	-40 ... +125 °C
Mating cycles	≥500
Degree of protection acc. to IEC 60529	IP65

### Material properties

Material (hood/housing)	Aluminium die-cast
Surface (hood/housing)	Powder-coated
Colour (hood/housing)	RAL 7037 (dust grey)
Material (seal)	NBR
Material (locking)	Polycarbonate (PC) Stainless steel



Pushing Performance

## Material properties

Colour (locking)	RAL 7037 (dust grey)
Material flammability class acc. to UL 94 (locking levers)	V-0
RoHS	compliant with exemption
RoHS exemptions	6(c): Copper alloy containing up to 4 % lead by weight
ELV status	compliant with exemption
China RoHS	50
REACH Annex XVII substances	No
REACH ANNEX XIV substances	No
REACH SVHC substances	Yes
REACH SVHC substances	Lead Potassium 1,1,2,2,3,3,4,4,4,4-nonafluorobutane-1-sulphonate

## Specifications and approvals

Specifications	IEC 61984
CE	Yes

## Commercial data

Packaging size	1
Net weight	75.4 g
Country of origin	Germany
European customs tariff number	85389099
eCl@ss	27440202 Shell for industrial connectors