


SAW Bandpass Filter 261901B



1. Features

- IF bandpass filter
- High attenuation
- Single-ended operation
- DIP Package
- Maximum Storage Temperature Range : -40℃ ~ 85℃
- Electrostatics Sensitive Device (ESD)

2. Package Dimension

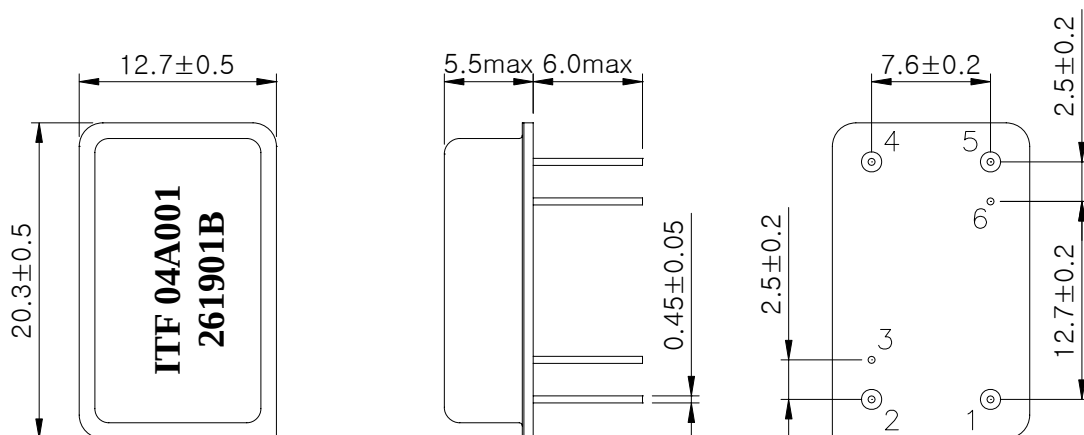

Package : D2012

Dimensions shown are nominal in millimeters

Base : Fe(SPCC), Au plating over Ni plated

Cap : Cu & Cr Alloy, Ni Plated

Termination : Kovar, Au Plated

Pin Configuration	
1	Input
5	Output
2, 4	Ground
3, 6	Case ground

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	261901B	
		Rev. Date	2004-07-09	
		Rev.	NM4018-CS02	1/5

SAW Bandpass Filter 261901B



3. Specifications

Fo = 280.0 MHz

Terminating source impedance : 50Ω and matching network

Terminating load impedance : 50Ω and matching network

		Minimum	Typical	Maximum
Center Frequency	MHz	279.875	280.0	280.125
Insertion Loss	dB	-	27.0	30.0
1dB Bandwidth	MHz	-	19.0	-
3dB Bandwidth	MHz	19.0	19.4	-
50dB Bandwidth	MHz	-	21.3	21.6
Amplitude Ripple (Fo +/- 9.375 MHz)	dB	-	0.7	1.2
Group Delay Variation (Fo +/- 9.375 MHz)	nsec	-	50	100
Absolute Delay	usec	-	2.32	-
Ultimate Rejection	dB	48	50	-
Temperature Coefficient of Frequency	ppm/°C	-	-23	-

Notes :

- 1) All specifications are based on the matching schematic shown below
- 2) All specifications are measured by Agilent Network analyzer and full 2 port calibration at room temperature
- 3) All attenuation measurements are measured relative to insertion loss


 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	261901B	
		Rev. Date	2004-07-09	
		Rev.	NM4018-CS02	2/5

SAW Bandpass Filter 261901B



4. Matching Schematic

(Actual matching values may vary due to PCB layout and parasitics)

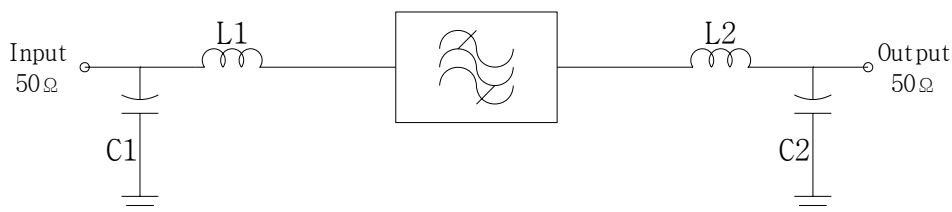

$$L1 = L2 = 12 \text{ nH}$$

$$C1 = C2 = 24 \text{ pF}$$

5. Marking Configuration

ITF¹⁾ 04A001²⁾

261901B³⁾

1) Manufacturer name

2) Lot Number



3) Part Number

 Integrated Technology Future	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809	Part No.	261901B	
		Rev. Date	2004-07-09	
		Rev.	NM4018-CS02	3/5

SAW Bandpass Filter 261901B







6. Typical Performance (at +25 °C)

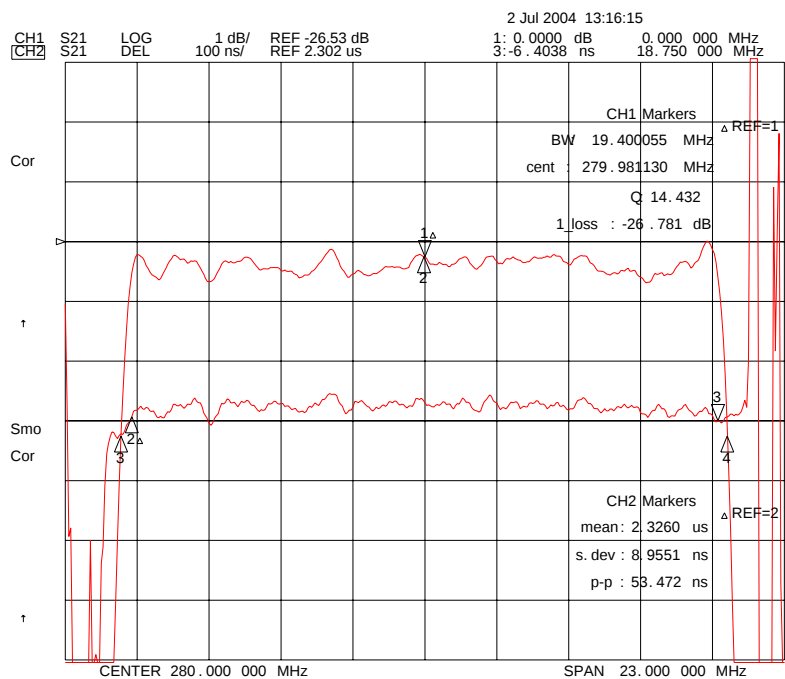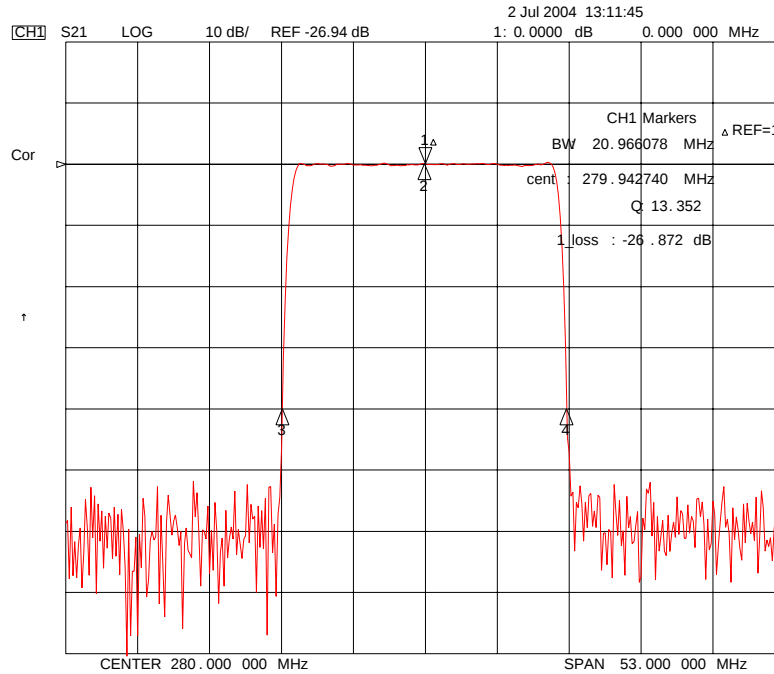

	ITF Co., Ltd. 102-901, Bucheon Technopark 364, Samjeong-Dong, Ojeong-Gu, Bucheon-City, Gyeonggi-Do, Korea 421-809		Part No. 261901B	
			Rev. Date 2004-07-09	
			Rev. NM4018-CS02	4/5

SAW Bandpass Filter 261901B

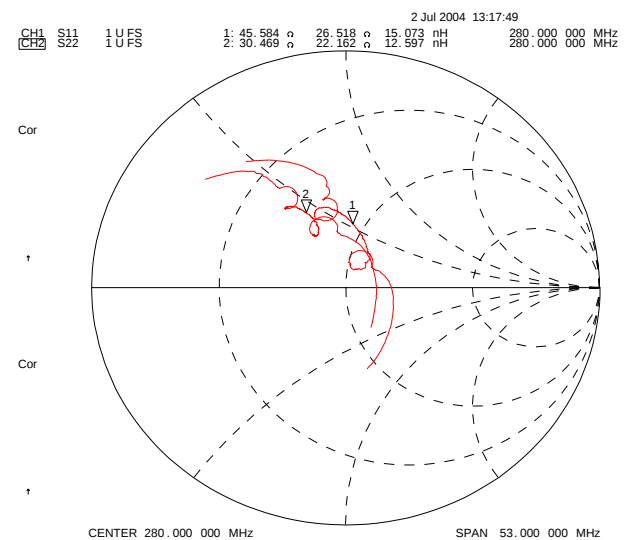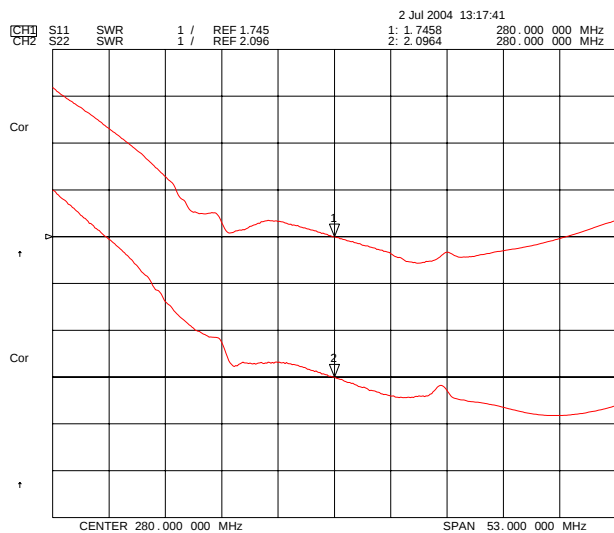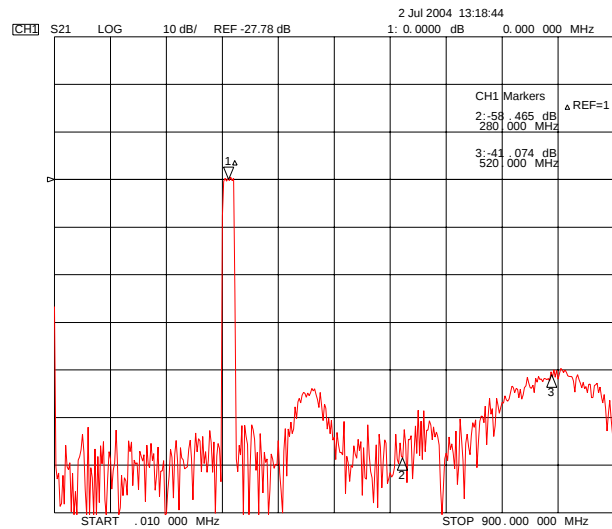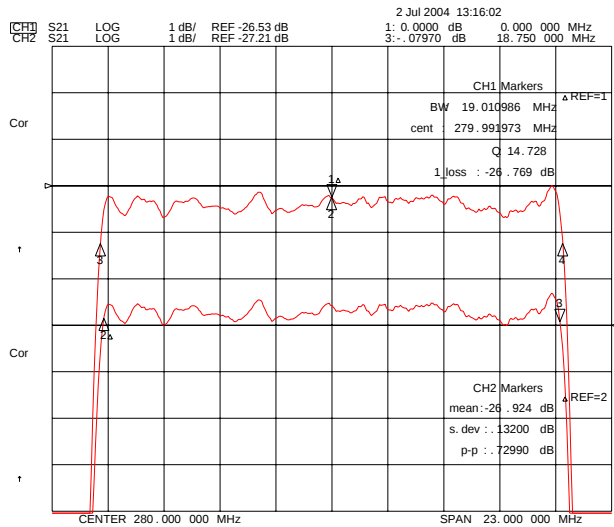

ITF Co., Ltd.
102-901, Bucheon Technopark 364,
Samjeong-Dong, Ojeong-Gu, Bucheon-City,
Gyeonggi-Do, Korea 421-809

Part No.

261901B

Rev. Date

2004-07-09

Rev.

NM4018-CS02

5/5