



DATE	REV	ECN	APP'D. BY
1/30/06	A1	7462	JM
2-14-11	A2	9128	TRM
5-23-12	A3	9477	SMN

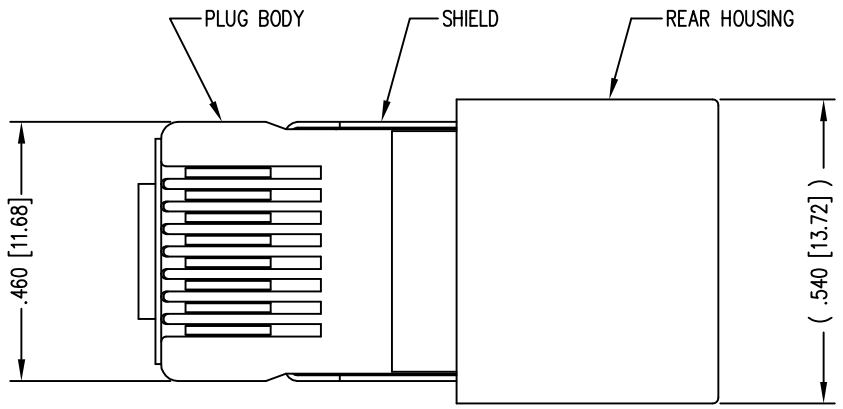

(SHOWN ASSEMBLED)

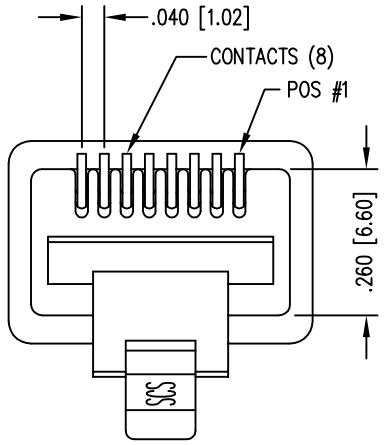


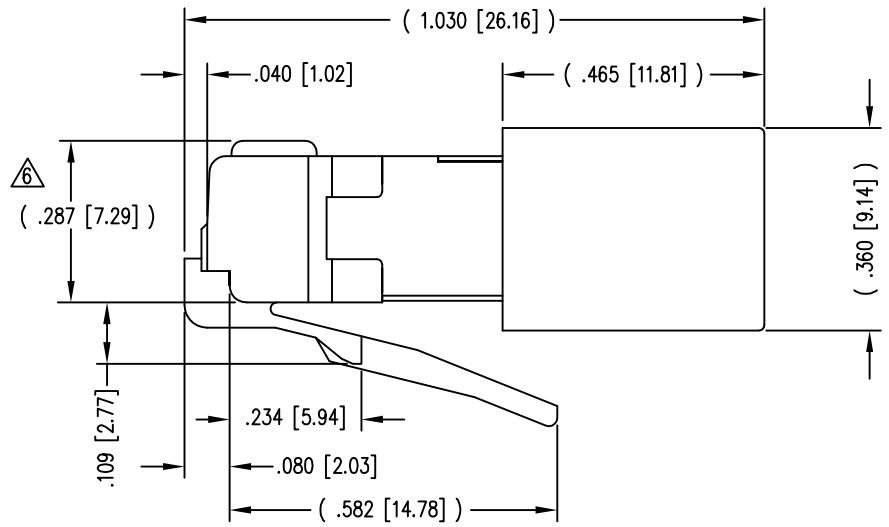

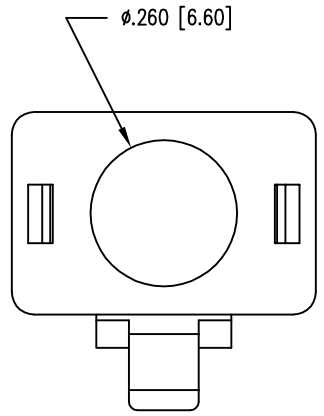


NOTES:

1- PLUG KIT CONSISTS OF :
   PRE-INSERTED PLUG HOUSING & SHIELD
   MANAGEMENT BAR
   FERRULE
2- MATERIALS :
   FRONT HOUSING PLASTIC : CLEAR POLYCARBONATE, UL 94-V0
   MANAGEMENT BAR : CLEAR POLYCARBONATE, UL 94-V0
   SHIELD : TIN PLATED BRASS
   CONTACTS : PHOSPHOR BRONZE, SELECTIVE GOLD PLATING
   FERRULE : NICKEL OR TIN PLATED BRASS
3- CONTACTS TERMINATE STRANDED & SOLID CONDUCTORS UP TO .042 [1.07] OUTSIDE DIAMETER OF INSULATION.
4- FOR PRODUCT SPECIFICATION SEE PR026-01.
5- DIMENSIONS AND TOLERANCES COMPLY WITH TIA-1096 STANDARD.
6 TERMINATED PLUG HEIGHT: .237 [6.02] ±.005 [0.13] ON CABLE
7- DESIGNED FOR CATEGORY 5/5e APPLICATIONS.

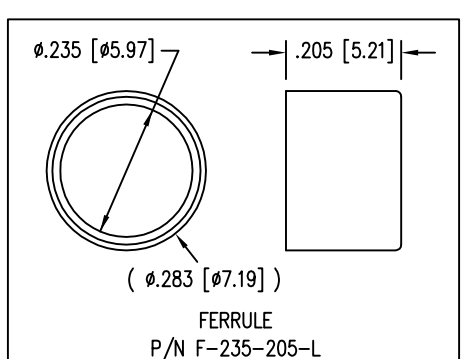

FERRULE
P/N F-235-205-L

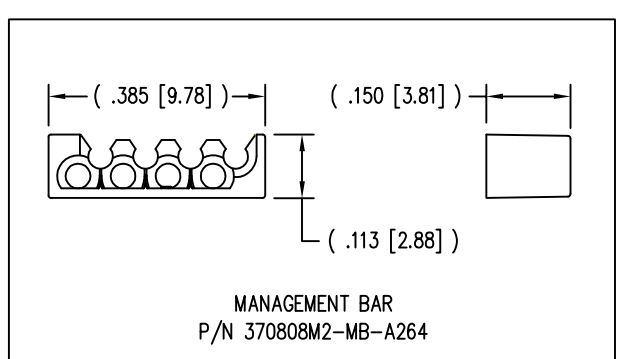

MANAGEMENT BAR
P/N 370808M2-MB-A264

BULK	50 MICRO-INCHES [1.27um]	CN0002
PACKAGE	CONTACT PLATING IN MATING AREA	PART NUMBER

RoHS 2002/95/EC

THIRD ANGLE PROJECTION

DO NOT SCALE DRAWING
DRAWING IS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS: INCHES [METRIC]
UNLESS OTHERWISE SPECIFIED TOLERANCES ARE ±.005 [0.13] ANGLES ARE ± 1°
SHEET NO. 1 OF 1

Bel Stewart Connector
11118 Susquehanna Trail South
Glen Rock, PA 17327-9199
(717) 235-7512 Fax: (717) 235-7954 http://www.stewartconnector.com

TITLE: SHIELDED CAT 5 PLUG 8 X 8

THIS DRAWING AND THE SUBJECT MATTER SHOWN THEREON ARE CONFIDENTIAL AND THE PROPRIETARY PROPERTY OF BEL STEWART CONNECTOR AND SHALL NOT BE REPRODUCED, COPIED, OR USED IN ANY MANNER WITHOUT PRIOR WRITTEN CONSENT OF BEL STEWART CONNECTOR. THIS PRODUCT MAY BE PROTECTED BY ONE OR MORE OF THE FOLLOWING US PATENTS:
5628647 6402559 6409535 6524128
7753717 8033863
OTHER PATENTS MAY BE PENDING.

DRN BY:	R.C.	DATE	6-26-97
APPD BY:	R.L.	DATE	6-26-97
DWG NO.	CT370014	REV.	A3

REV. 7/3/03

AutoCAD