



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	1	INITIAL RELEASE	26AUG2019	BM	RH

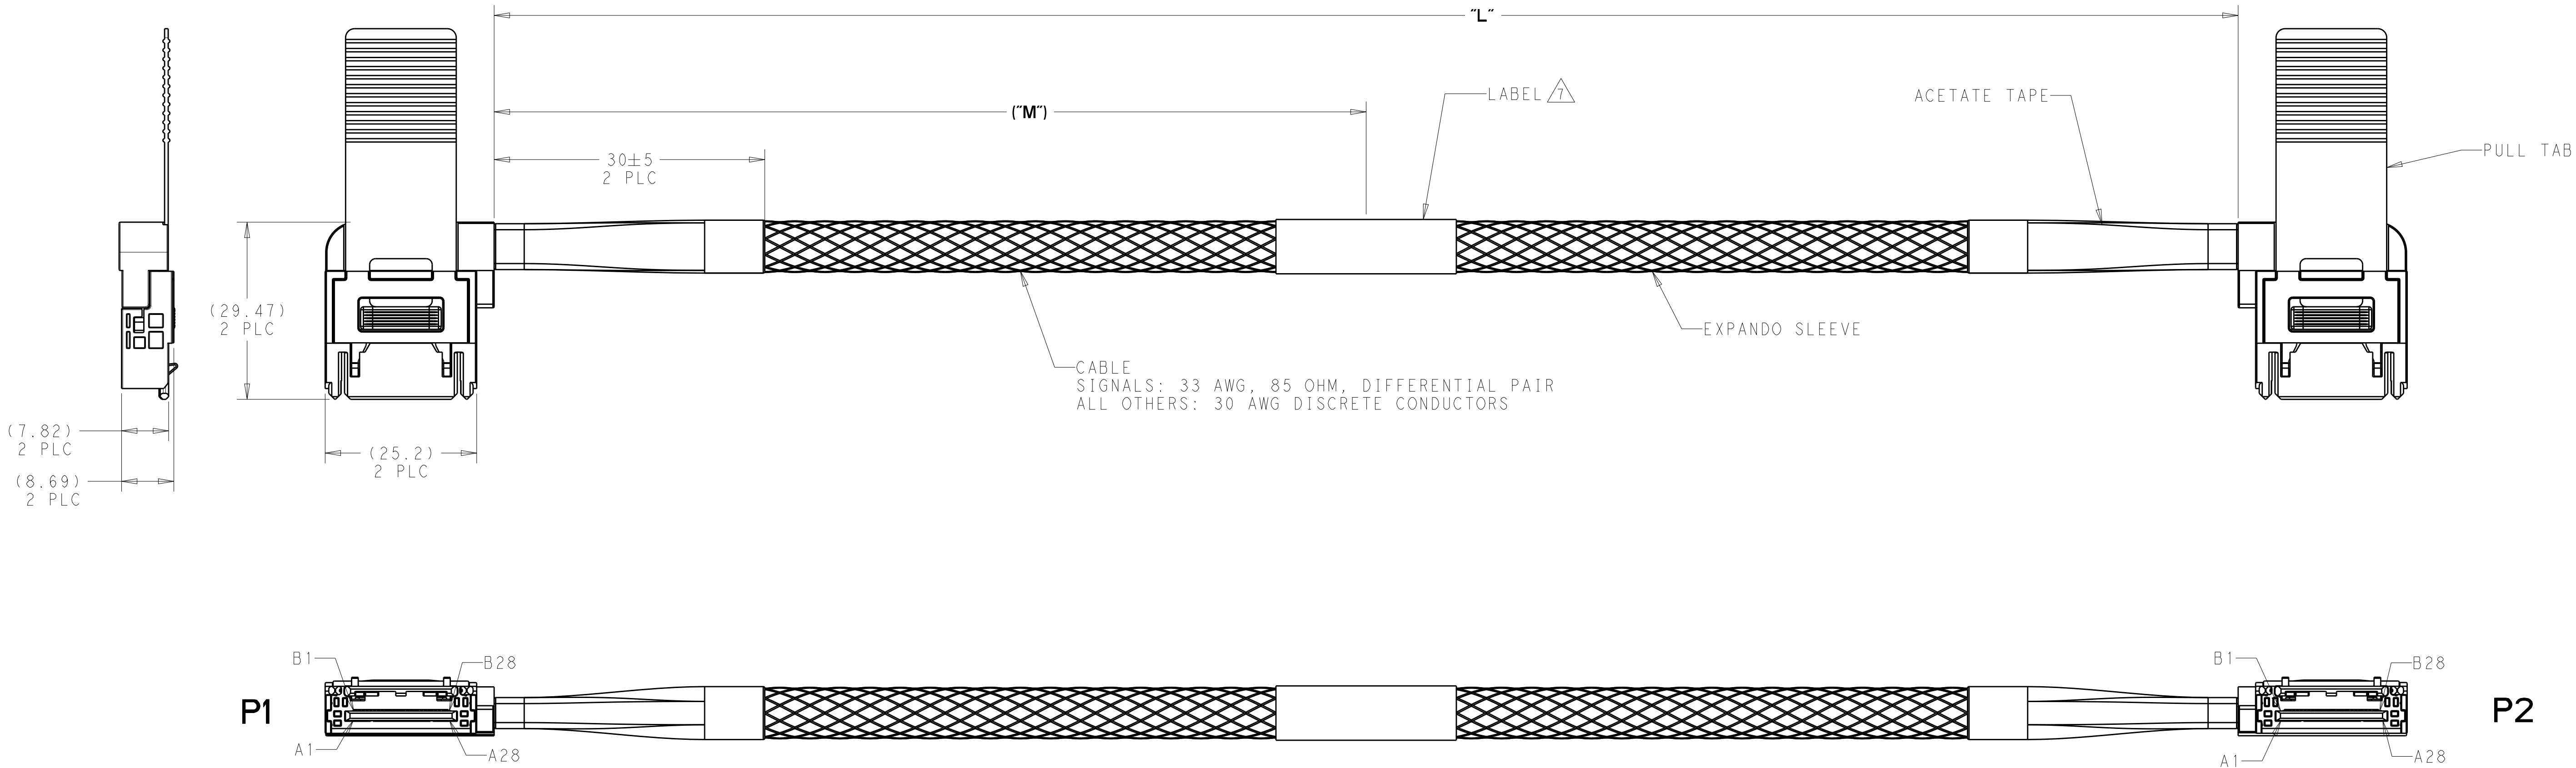

1. ALL MATERIALS, COMPONENTS AND PROCESS SHALL COMPLY WITH TEC-138-702. (CONTAINS NO BANNED OR RESTICTED SUBSTANCES).
2. NO REACH SvHC SHALL BE CONTAINED ABOVE THE THRESHOLD AS DEFINED IN REACH SvHC COMPLIANCE DEFINITION IN ANNEX A OF TEC-138-702.
3. ASSEMBLY TESTED FOR CONTINUITY, OPENS, SHORTS, AND SIGNAL INTEGRITY.
4. CABLE BEND RADIUS 5X BUNDLED CABLE OD.
5. SEE SHEETS 2 FOR WIRING SCHEMATIC.
6. CONNECTORS ARE GEN-Z COMPATIBLE.

7. LABEL INFORMATION SHOWN BELOW:

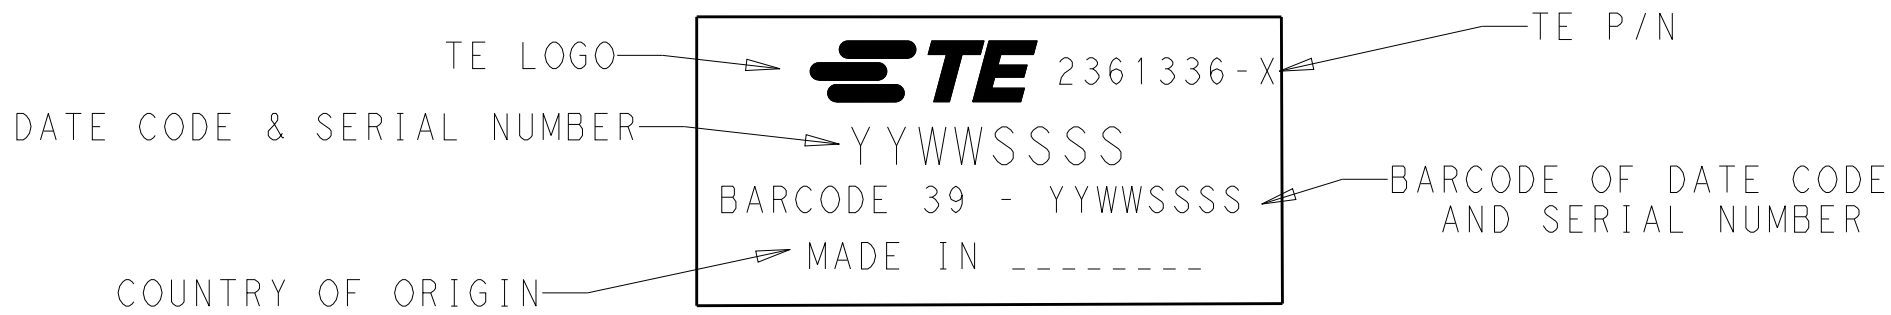

8. CABLE CONNECTOR MATES WITH TE SLIVER RECEPTACLE P/N 2332141-X, OR 2332208-X.

500	1000 +10/-0	2361336-2
250	500 +10/-0	2361336-1
("M")	"L"	TE P/N

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MATTHEWS 26AUG2019	TE Connectivity	
DIMENSIONS:		CHK R. HENRY 26AUG2019		
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	NAME	SLIVER 2.0 1C 33 AWG LATERAL TO LATERAL
	0 PLC	±"	PRODUCT SPEC	
	1 PLC	±"	APPLICATION SPEC	
	2 PLC	±"	SIZE	CAGE CODE
	3 PLC	±"	DRAWING NO	RESTRICTED TO
MATERIAL	SEE BOM	-	WEIGHT	-
	-	-	CUSTOMER DRAWING	SCALE 7:4 SHEET 1 OF 2 REV 1

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

P1			WIRE TYPE	P2		
PIN NO.	PAIR NO.	DESIGNATION		DESIGNATION	PAIR NO.	PIN NO.
A1		GROUND	30AWG DISCRETE	GROUND		A1
A2		GROUND	30AWG DISCRETE	GROUND		A2
A3		GROUND	30AWG DISCRETE	GROUND		A3
A4		GROUND	30AWG DISCRETE	GROUND		A4
A5		GROUND	30AWG DISCRETE	GROUND		A5
A6		GROUND	30AWG DISCRETE	GROUND		A6
A7		SIDE BAND	30AWG DISCRETE	SIDE BAND		A7
A8		SIDE BAND	30AWG DISCRETE	SIDE BAND		A8
A9		SIDE BAND	30AWG DISCRETE	SIDE BAND		A9
A10		SIDE BAND	30AWG DISCRETE	SIDE BAND		A10
A11		SIDE BAND	30AWG DISCRETE	SIDE BAND		A11
A12		SIDE BAND	30AWG DISCRETE	SIDE BAND		A12
A13		GND		GND		A13
A14		CLK	33AWG DIFF PAIR	CLK		A14
A15		CLK	33AWG DIFF PAIR	CLK		A15
A16		GND		GND		A16
A17	1	PCIe TX	33AWG DIFF PAIR	PCIe TX	1	A17
A18	1	PCIe TX	33AWG DIFF PAIR	PCIe TX	1	A18
A19		GND		GND		A19
A20	2	PCIe TX	33AWG DIFF PAIR	PCIe TX	2	A20
A21	2	PCIe TX	33AWG DIFF PAIR	PCIe TX	2	A21
A22		GND		GND		A22
A23	3	PCIe TX	33AWG DIFF PAIR	PCIe TX	3	A23
A24	3	PCIe TX	33AWG DIFF PAIR	PCIe TX	3	A24
A25		GND		GND		A25
A26	4	PCIe TX	33AWG DIFF PAIR	PCIe TX	4	A26
A27	4	PCIe TX	33AWG DIFF PAIR	PCIe TX	4	A27
A28		GND		GND		A28

P1			WIRE TYPE	P2		
PIN NO.	PAIR NO.	DESIGNATION		DESIGNATION	PAIR NO.	PIN NO.
B1		12V POWER	30AWG DISCRETE	12V POWER		B1
B2		12V POWER	30AWG DISCRETE	12V POWER		B2
B3		12V POWER	30AWG DISCRETE	12V POWER		B3
B4		12V POWER	30AWG DISCRETE	12V POWER		B4
B5		12V POWER	30AWG DISCRETE	12V POWER		B5
B6		12V POWER	30AWG DISCRETE	12V POWER		B6
B7		SIDE BAND	30AWG DISCRETE	SIDE BAND		B7
B8		SIDE BAND	30AWG DISCRETE	SIDE BAND		B8
B9		SIDE BAND	30AWG DISCRETE	SIDE BAND		B9
B10		SIDE BAND	30AWG DISCRETE	SIDE BAND		B10
B11		3.3 AUX POWER	30AWG DISCRETE	3.3 AUX POWER		B11
B12		SIDE BAND	30AWG DISCRETE	SIDE BAND		B12
B13		GND		GND		B13
B14		CLK	33AWG DIFF PAIR	CLK		B14
B15		CLK	33AWG DIFF PAIR	CLK		B15
B16		GND		GND		B16
B17	5	PCIe RX	33AWG DIFF PAIR	PCIe RX	5	B17
B18	5	PCIe RX	33AWG DIFF PAIR	PCIe RX	5	B18
B19		GND		GND		B19
B20	6	PCIe RX	33AWG DIFF PAIR	PCIe RX	6	B20
B21	6	PCIe RX	33AWG DIFF PAIR	PCIe RX	6	B21
B22		GND		GND		B22
B23	7	PCIe RX	33AWG DIFF PAIR	PCIe RX	7	B23
B24	7	PCIe RX	33AWG DIFF PAIR	PCIe RX	7	B24
B25		GND		GND		B25
B26	8	PCIe RX	33AWG DIFF PAIR	PCIe RX	8	B26
B27	8	PCIe RX	33AWG DIFF PAIR	PCIe RX	8	B27
B28		GND		GND		B28

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
B. MATTHEWS
26AUG2019

CHK
R. HENRY
26AUG2019

APVD
-

NAME
SLIVER 2.0 1C 33 AWG
LATERAL TO LATERAL

DIMENSIONS:
mm

0 PLC
1 PLC
2 PLC
3 PLC
4 PLC
ANGLES
FINISH

±
±
±
±
±
±
±

MATERIAL
SEE BOM
-

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

-
-

PRODUCT SPEC
APPLICATION SPEC
WEIGHT
CUSTOMER DRAWING

SIZE
A1

CAGE CODE
00779

DRAWING NO
C=2361336

RESTRICTED TO
-

SCALE
1:1

SHEET
2

OF
2

REV
1

TE Connectivity