



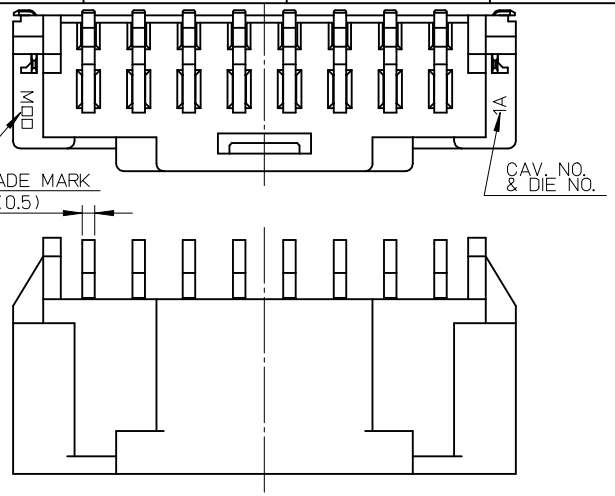


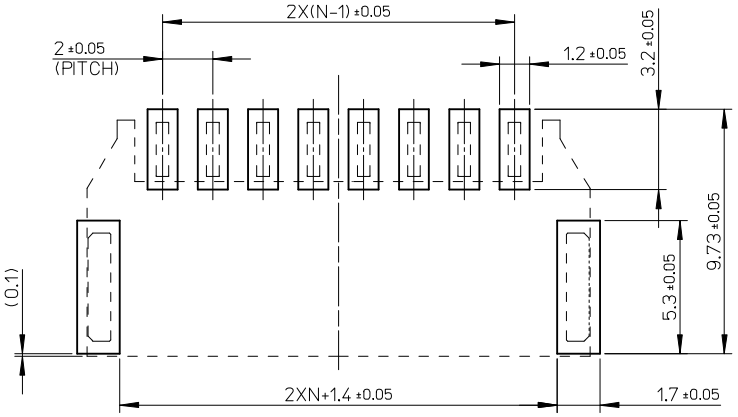


参考基板取り付け寸法(N=極数)

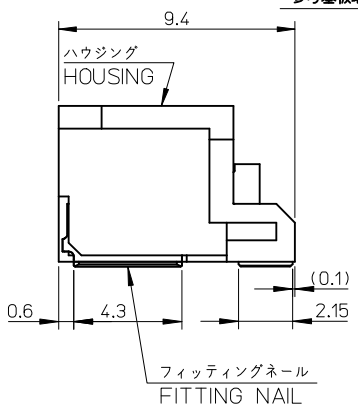



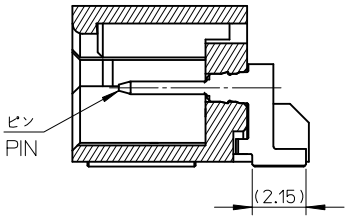

SECTION Z-Z



嵌合寸法
MATED DIMENSION

注記
NOTES

1. 材質
   ハウジング：耐熱性ナイロン UL94V-0
   ピン：銅合金、ニッケル下地、錫メッキ、金メッキ
   フィッティングネール：銅合金、ニッケル下地、錫メッキ
   MATERIAL
   HOUSING: POLYAMIDE UL94V-0
   PIN: COPPER ALLOY, GOLD OR TIN OVER NICKEL PLATE.
   FINNTING NAIL: COPPER ALLOY, TIN OVER NICKEL PLATE.
2. 色：ナチュラル、黒、赤、青
   COLOR: NATURAL, BLACK, RED, BLUE
3. 嵌合相手
   ハウジング:502351-**0*
   錫メッキ端子:50212-8*00、50372-8*00、560085-0101
   金メッキ端子:56161-8*81
   MATES WITH
   HOUSING: 502351-**0*
   SN PLATING TERMINAL: 50212-8*00,50372-8*00,560085-0101
   AU PLATING TERMINAL: 56161-8*81
4. エンボス梱包品の詳細はSD-502352-002参照
   DETAILED TAPING PACKAGE, SEE SD-502352-002.
5. ELV及びRoHS適合
   ELV AND RoHS COMPLIANT
6. 半田付け面のコプラナリティ: 0.1mm MAX.
   CO-PLANARITY OF SOLDERING TAILS TO BE 0.1mm MAX.
7. 一般公差
   GENERAL TOLERANCES
   10 UNDER: 0.2
   10 OVER 30 UNDER: 0.25
   30 OVER: 0.3
   ANGULAR: ±3°

REVISED
EC NO: JTR2016-0015 2016/03/01
DRWN:KNAGAI02 2016/03/04
CHKD:HKOMATSU 2016/03/08
APPR:MAYAMAMOTO 2016/03/08
DESCRIPTION
REV
K

QUALITY SYMBOLS
F_A=0
F_C=0
F_P=0

GENERAL TOLERANCES (UNLESS SPECIFIED)


	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±
ANGULAR ± - °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE	MM ONLY
SCALE	5:1
DESIGN UNITS	METRIC
	THIRD ANGLE PROJECTION
DRAWN BY	SHSHIBATA
DATE	2007/12/18
CHECKED BY	HKOMATSU
DATE	2007/12/18
APPROVED BY	AKANESHIGE
DATE	2007/12/18
MATERIAL NO.	SEE CHART
TITLE	2.0MM PITCH W/B CONN. WAFER ASSY R/A SMT
DOCUMENT NO.	SD-502352-001
SHEET NO.	1 OF 4
SIZE	A3

molex

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

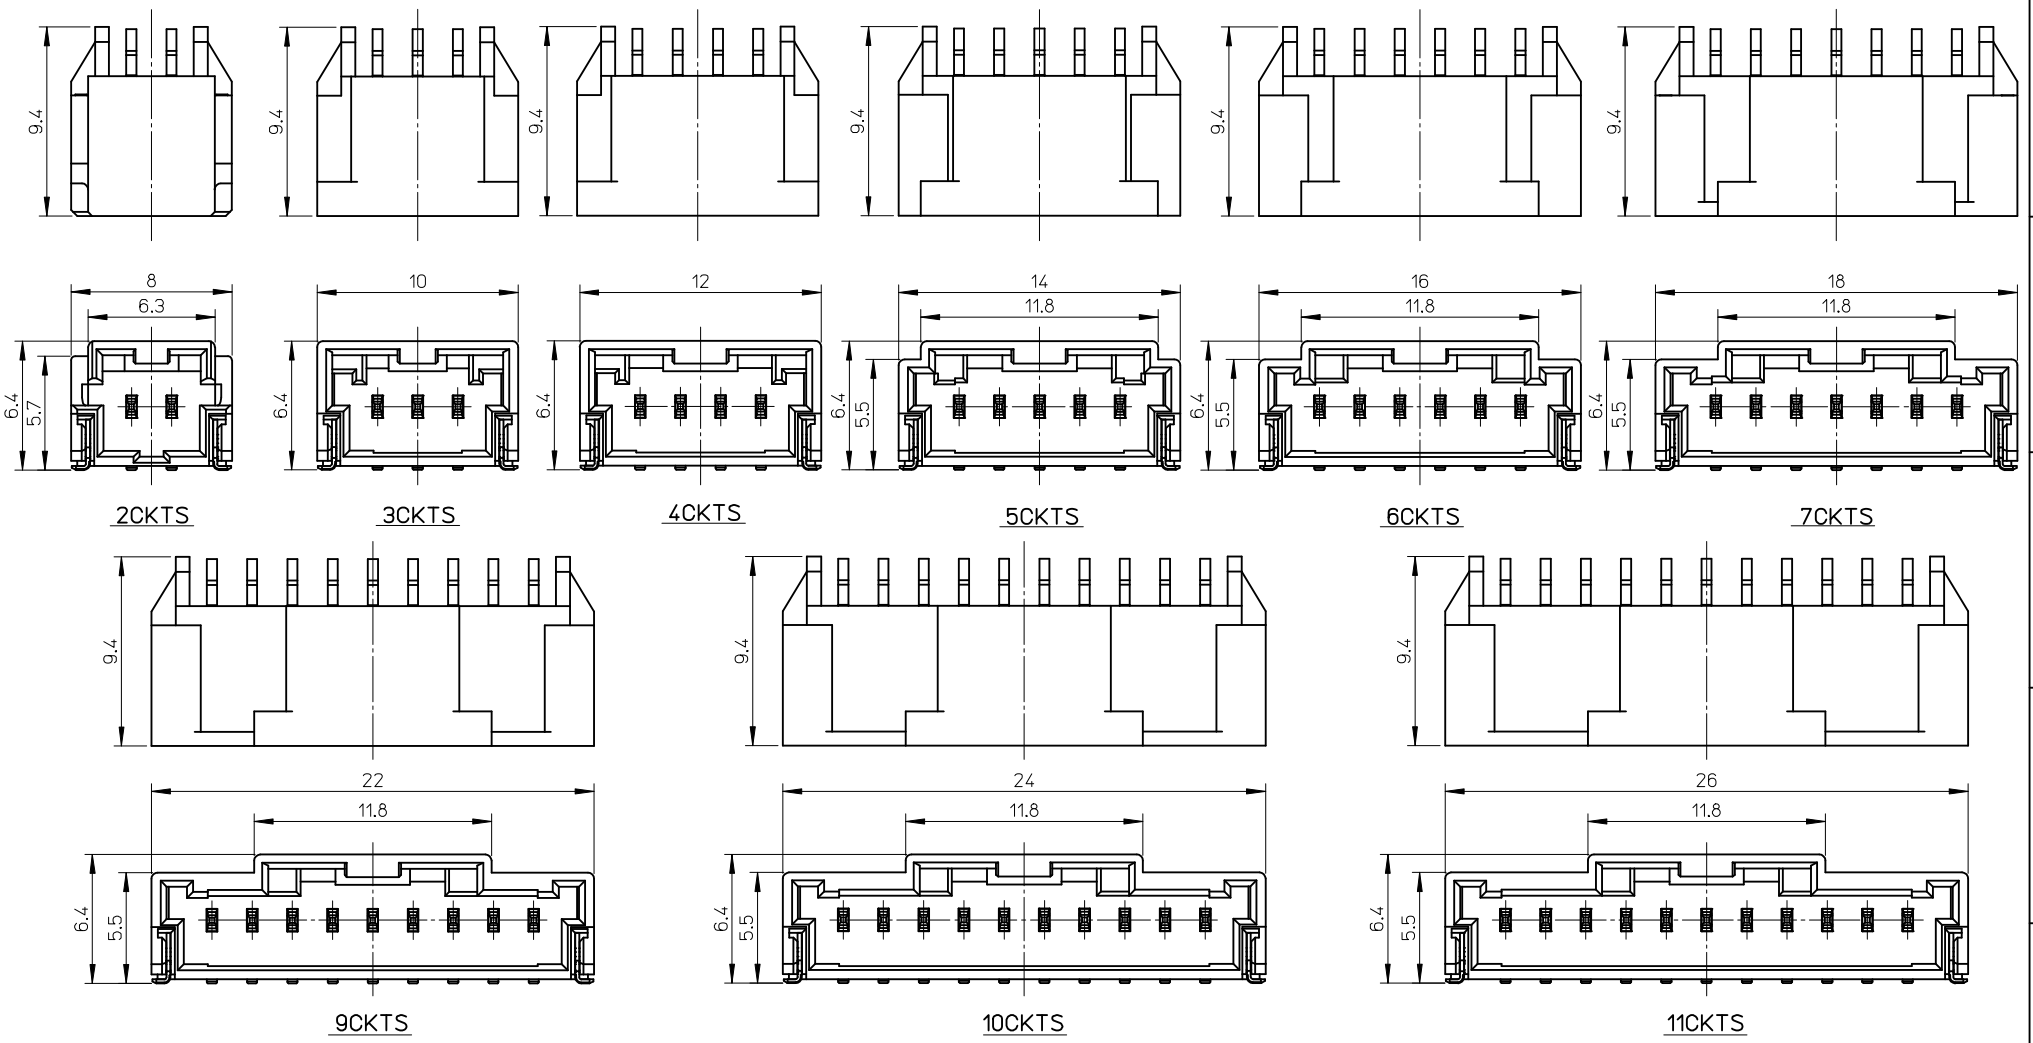

REVISED			
EC NO: JTR2016-0015			
DRWN:KNAGAI02	2016/03/01		
CH'KD:HKOMATSU	2016/03/04		
APPR:MAYAMAMOTO	2016/03/08		
REV	DESCRIPTION		
K			


QUALITY SYMBOLS

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±
ANGULAR ± - °		


DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: 4:1	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: SHSHIBATA	DATE: 2007/12/18	TITLE: 2.0MM PITCH W/B CONN. WAFER ASSY R/A SMT	
CHECKED BY: HKOMATSU	DATE: 2007/12/18		
APPROVED BY: AKANESHIGE	DATE: 2007/12/18	molex	
MATERIAL NO.: SEE CHART		DOCUMENT NO.: SD-502352-001	SHEET NO.: 2 OF 4
SIZE: A3			


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

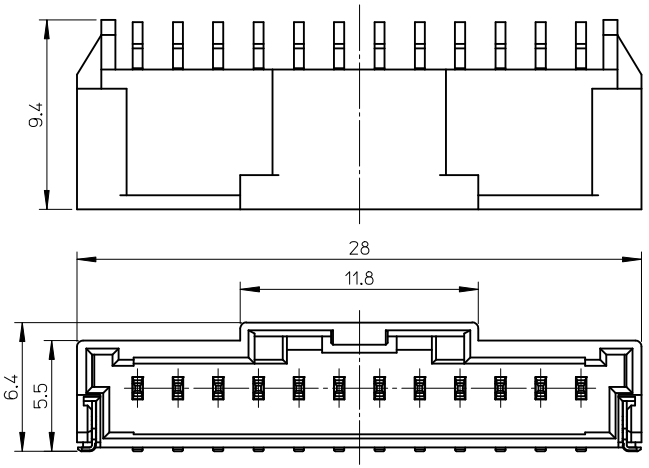


12CKTS

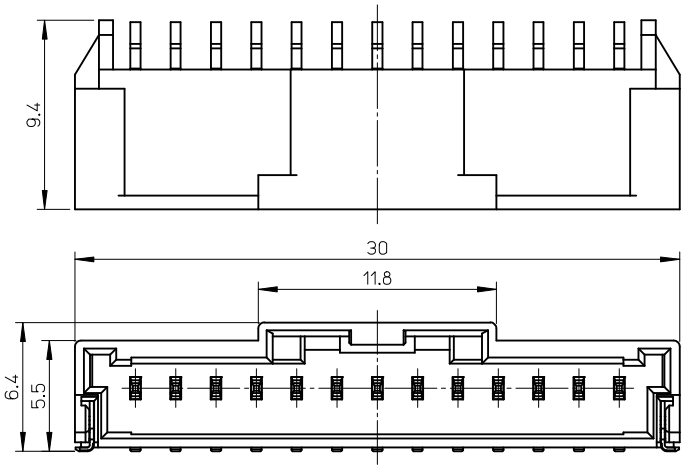

13CKTS

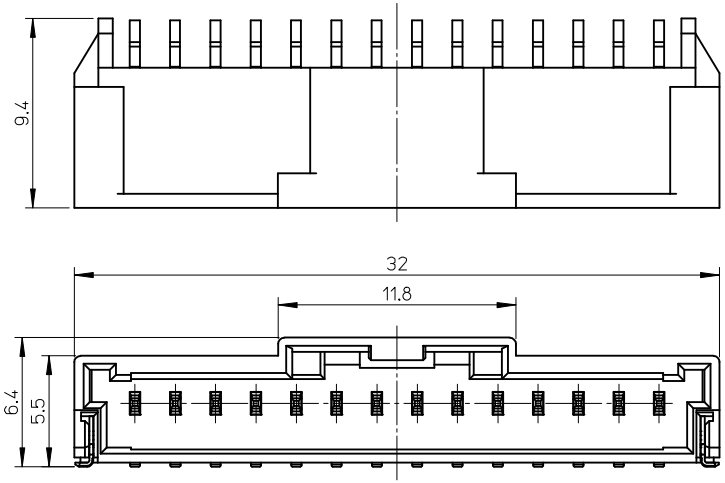

14CKTS

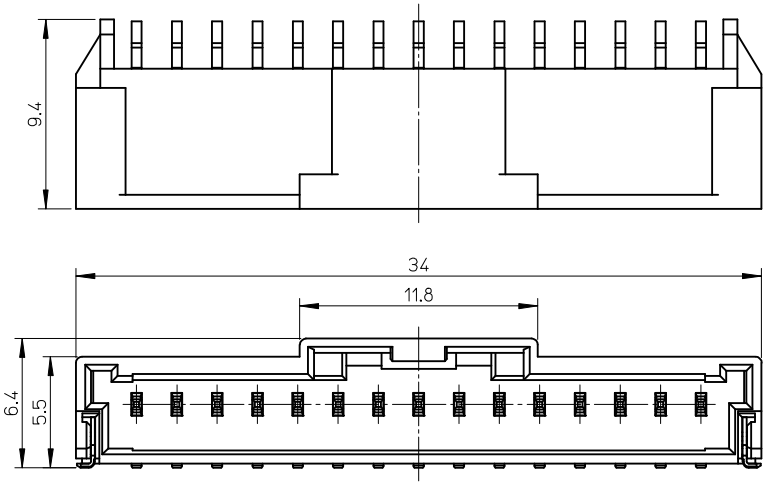

15CKTS

REVISED
EC NO: JTR2016-0015 2016/03/01
DRWN:KNAGAI02 2016/03/04
CH'KD:HKOMATSU 2016/03/08
APPR:MAYAMAMOTO 2016/03/08
DESCRIPTION
REV
K

QUALITY SYMBOLS
F =0
S =0
R =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±

ANGULAR ± - °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 4:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: SHSHIBATA DATE: 2007/12/18
CHECKED BY: HKOMATSU DATE: 2007/12/18
APPROVED BY: AKANESHIGE DATE: 2007/12/18

TITLE: 2.0MM PITCH W/B CONN. WAFER ASSY R/A SMT

molex

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-502352-001
SHEET NO.: 3 OF 4
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PLATING COLOR	A	EMBOSSED PACKAGE ORDER NO.	CKTS
Sn NATURAL	34.0	502352-1500	15
	32.0	502352-1400	14
	30.0	502352-1300	13
	28.0	502352-1200	12
	26.0	502352-1100	11
	24.0	502352-1000	10
	22.0	502352-0900	9
	20.0	502352-0800	8
	18.0	502352-0700	7
	16.0	502352-0600	6
	14.0	502352-0500	5
	12.0	502352-0400	4
	10.0	502352-0300	3
	8.0	502352-0200	2

CONNECTOR SERIES NO. 502352-**08

PLATING COLOR	A	EMBOSSED PACKGE ORDER NO.	CKTS
Au NATURAL	34.0	502352-1510	15
	32.0	502352-1410	14
	30.0	502352-1310	13
	28.0	502352-1210	12
	26.0	502352-1110	11
	24.0	502352-1010	10
	22.0	502352-0910	9
	20.0	502352-0810	8
	18.0	502352-0710	7
	16.0	502352-0610	6
	14.0	502352-0510	5
	12.0	502352-0410	4
	10.0	502352-0310	3
	8.0	502352-0210	2

CONNECTOR SERIES NO. 502352-**18

PLATING COLOR	A	EMBOSSED PACKAGE ORDER NO.	CKTS
Sn BLACK			15
			14
			13
			12
			11
			10
			9
	20.0	502352-0801	8
	18.0	502352-0701	7
	16.0	502352-0601	6
	14.0	502352-0501	5
	12.0	502352-0401	4
	10.0	502352-0301	3
	8.0	502352-0201	2

CONNECTOR SERIES NO. 502352-**28

PLATING COLOR	A	EMBOSSED PACKAGE ORDER NO.	CKTS
Sn RED			15
			14
			13
			12
			11
			10
			9
	20.0	502352-0802	8
			7
	16.0	502352-0602	6
			5
	12.0	502352-0402	4
	10.0	502352-0302	3
	8.0	502352-0202	2

CONNECTOR SERIES NO. 502352-**48

PLATING COLOR	A	EMBOSSED PACKAGE ORDER NO.	CKTS
Sn BLUE			15
			14
			13
			12
			11
			10
			9
	20.0	502352-0803	8
			7
	16.0	502352-0603	6
			5
	12.0	502352-0403	4
	10.0	502352-0303	3
	8.0	502352-0203	2

CONNECTOR SERIES NO. 502352-**68

REVISED
EC NO: JTR2016-0015 2016/03/01
DRWN:KNAGAI02 2016/03/04
CH'KD:HKOMATSU 2016/03/08
APPR:MAYAMAMOTO
DESCRIPTION
REV
K

QUALITY SYMBOLS
F=0
Fc=0
Fp=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	±	±

ANGULAR ± - °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 5:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION


DRAWN BY: SHSHIBATA DATE: 2007/12/18
CHECKED BY: HKOMATSU DATE: 2007/12/18
APPROVED BY: AKANESHIGE DATE: 2007/12/18

TITLE: 2.0MM PITCH W/B CONN. WAFER ASSY R/A SMT


molex


MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-502352-001
SHEET NO.: 4 OF 4
SIZE: A3


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION



DETAIL Y

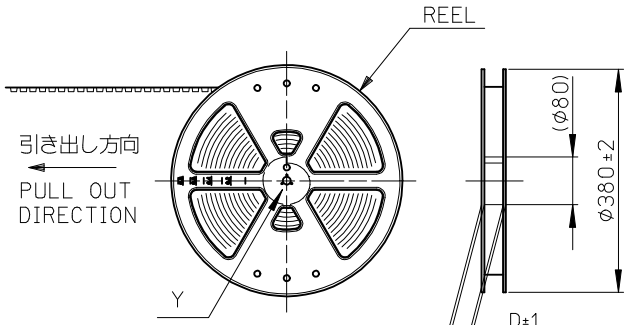

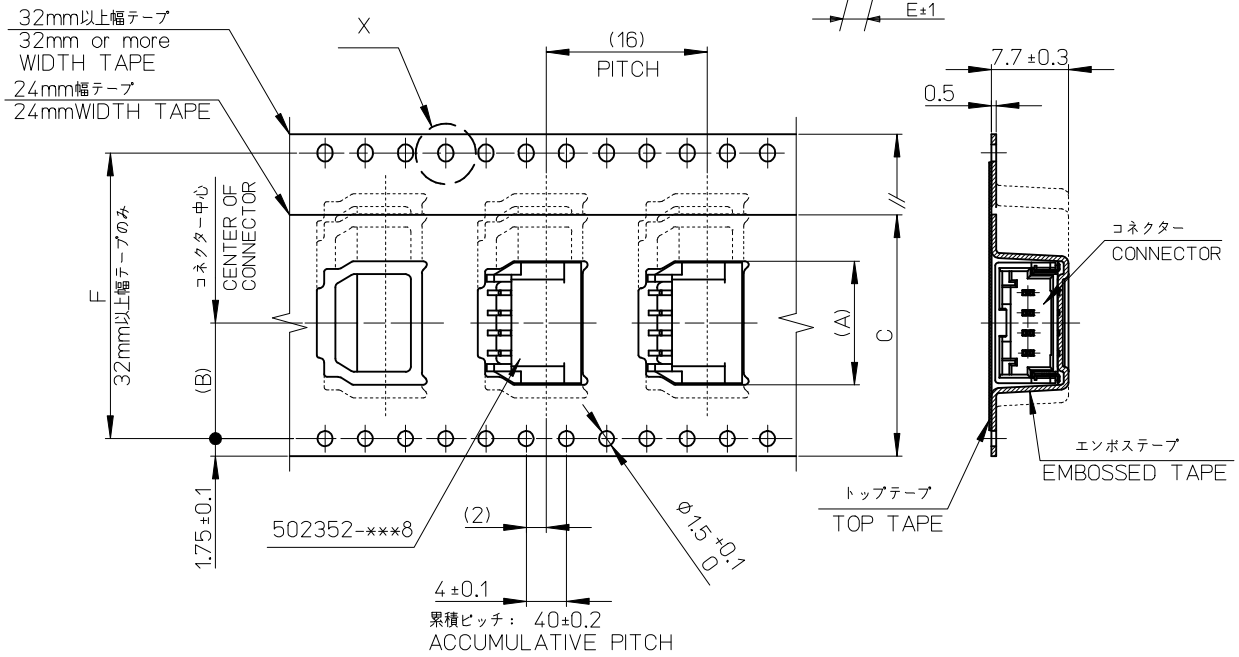




DETAIL X
(SCALE 10:1)

引き出し方向
PULL OUT DIRECTION

エンボステープ内の製品の向き
DIRECTION OF CONNECTOR
IN EMBOSSED TAPE

注記
NOTES

1. 製品番号
   ナチュラル・錫めっき: 502352-**00
   ナチュラル・金めっき: 502352-**10
   黒・錫めっき: 502352-**01
   赤・錫めっき: 502352-**02
   青・錫めっき: 502352-**03
   詳細寸法については、製品単体図面を参照下さい。
   PART NO.
   NATURAL Sn Plating: 502352-**00
   NATURAL Au Plating: 502352-**10
   BLACK Sn Plating: 502352-**01
   RED Sn Plating: 502352-**02
   BLUE Sn Plating: 502352-**03
   SEE SALES DRAWING FOR CONNECTOR
2. 梱包数量： 700個/リール
   NUMBER OF CONNECTORS 700PCS/REEL
3. リードテープ長さ
   LEAD TAPE LENGHT

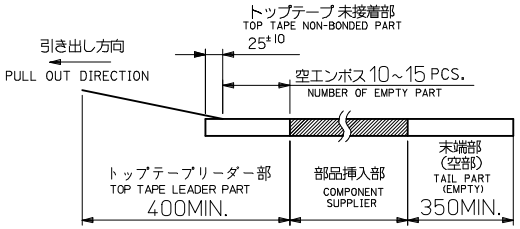

4. 材料
   MATERIAL
   キャリアテープ： ポリスチレン
   CARRIER TAPE: POLYSTYRENE
   トップテープ： PET, PE, PEF
   TOP TAPE: PET, PE, PEF
   リール： ポリスチレン
   REEL: POLYSTYRENE
5. 一般降参
   GENERAL TOLERANCES
   10 UNDER: 0.2
   10 OVER 30 UNDER: 0.25
   30 OVER: 0.3
   ANGULAR: ±1°

REVISED
EC NO: JTR2016-0015 2016/03/01
DRWN:KNAGAI02 2016/03/04
CH'KD:HKOMATSU 2016/03/08
APPR:MAYAMAMOTO 2016/03/08
DESCRIPTION
REV J

QUALITY SYMBOLS
F_V=0
F_C=0
F_P=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	± ---	± ---

ANGULAR ± - °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY	SHSHIBATA	DATE 2007/6/6
CHECKED BY	TAITO	DATE 2007/6/6
APPROVED BY	MAYAMAMOTO	DATE 2012/03/14

TITLE
2.0MM PITCH W/B CONN. WAFER ASSY EMBOSSED TAPE PACKAGE

molex

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-502352-002
SHEET NO.: 1 OF 2
SIZE A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

PLATING COLOR	F	E	D	C	(B)	(A)	エンボス梱包品 製品番号 MATERIAL NO.	極数 CKT.
Sn NATURAL	52.4	61.4	57.4	56	26.2	34.3	502352-1500	15
						32.3	502352-1400	14
	40.4	49.4	45.4	44	20.2	30.3	502352-1300	13
						28.3	502352-1200	12
						26.3	502352-1100	11
						24.3	502352-1000	10
						22.3	502352-0900	9
	28.4	37.4	33.4	32	14.2	20.3	502352-0800	8
						18.3	502352-0700	7
						16.3	502352-0600	6
		29.4	25.4	24	11.5	14.3	502352-0500	5
						12.3	502352-0400	4
						10.3	502352-0300	3
						8.3	502352-0200	2

PLATING COLOR	F	E	D	C	(B)	(A)	エンボス梱包品 製品番号 MATERIAL NO.	極数 CKT.
Au NATURAL	52.4	61.4	57.4	56	26.2	34.3	502352-1510	15
						32.3	502352-1410	14
	40.4	49.4	45.4	44	20.2	30.3	502352-1310	13
						28.3	502352-1210	12
						26.3	502352-1110	11
						24.3	502352-1010	10
						22.3	502352-0910	9
	28.4	37.4	33.4	32	14.2	20.3	502352-0810	8
						18.3	502352-0710	7
						16.3	502352-0610	6
		29.4	25.4	24	11.5	14.3	502352-0510	5
						12.3	502352-0410	4
						10.3	502352-0310	3
						8.3	502352-0210	2

PLATING COLOR	F	E	D	C	(B)	(A)	エンボス梱包品 製品番号 MATERIAL NO.	極数 CKT.
Sn BLACK								15
								14
								13
								12
								11
								10
								9
	28.4	37.4	33.4	32	14.2	20.3	502352-0801	8
						18.3	502352-0701	7
						16.3	502352-0601	6
		29.4	25.4	24	11.5	14.3	502352-0501	5
						12.3	502352-0401	4
						10.3	502352-0301	3
						8.3	502352-0201	2

PLATING COLOR	F	E	D	C	(B)	(A)	エンボス梱包品 製品番号 MATERIAL NO.	極数 CKT.
Sn RED								15
								14
								13
								12
								11
								10
								9
	28.4	37.4	33.4	32	14.2	20.3	502352-0802	8
								7
						16.3	502352-0602	6
		29.4	25.4	24	11.5			5
						12.3	502352-0402	4
						10.3	502352-0302	3
						8.3	502352-0202	2

PLATING COLOR	F	E	D	C	(B)	(A)	エンボス梱包品 製品番号 MATERIAL NO.	極数 CKT.
Sn BLUE								15
								14
								13
								12
								11
								10
								9
	28.4	37.4	33.4	32	14.2	20.3	502352-0803	8
								7
						16.3	502352-0603	6
		29.4	25.4	24	11.5			5
						12.3	502352-0403	4
						10.3	502352-0303	3
						8.3	502352-0203	2

REVISED
EC NO: JTR2016-0015 2016/03/01
DRWN:KNAGAI02 2016/03/04
CH'KD:HKOMATSU 2016/03/08
APPR:MAYAMAMOTO 2016/03/08
DESCRIPTION
REV J

QUALITY SYMBOLS
F =0
Fc =0
Fn =0

GENERAL TOLERANCES (UNLESS SPECIFIED)

	mm	INCH
4 PLACES	± ---	± ---
3 PLACES	± ---	± ---
2 PLACES	± ---	± ---
1 PLACE	± ---	± ---
0 PLACE	± ---	± ---
ANGULAR ± - °		

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

		DATE
DRAWN BY	SHSHIBATA	2007/6/6
CHECKED BY	TAITO	2007/6/6
APPROVED BY	MAYAMAMOTO	2012/03/14

TITLE: 2.0MM PITCH W/B CONN. WAFER ASSY EMBOSSED TAPE PACKAGE

molex

MATERIAL NO.: SEE CHART
DOCUMENT NO.: SD-502352-002
SHEET NO.: 2 OF 2
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION