

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST
FT	0


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	L1	REVISED PER ECO-08-029974	03DEC08	HMR	GS
	L2	REVISED PER ECO-10-000443	13JAN10	KK	AEG

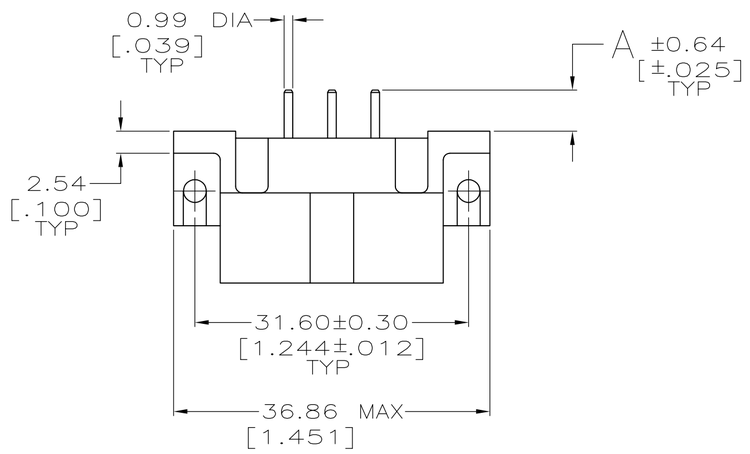

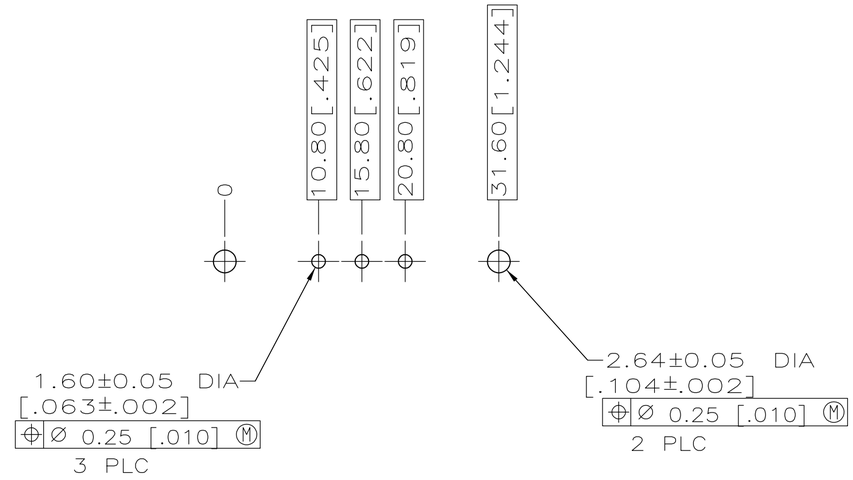

RECOMMENDED PC BOARD LAYOUT

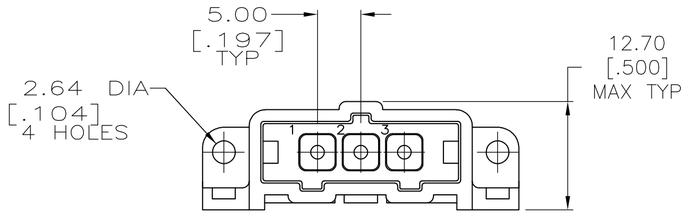

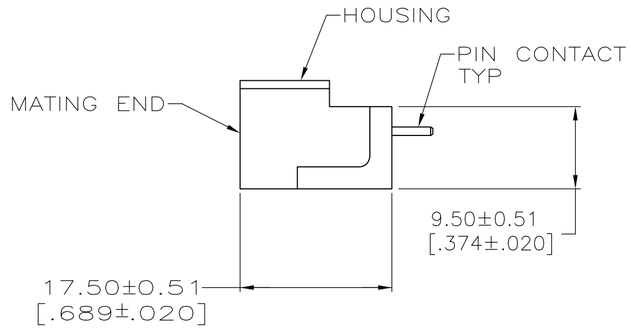

1. NYLON, RED.
2. BRASS PER ASTM B36.
3. 3.81um [.000150] MIN TIN-LEAD OVER 2.54um [.000100] MIN COPPER OR 1.27um [.000050] MIN NICKEL.
4. 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 5.36 [.211] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
5. .000150 MIN TIN OVER .000100 MIN CU, OR .000050 MIN NICKEL.
6. 0.76um [.000030] MIN GOLD FOR A LENGTH OF 5.08 [.200] MIN FROM MATING END 3.81um [.000150] MIN TIN FOR A LENGTH OF 5.36 [.211] MIN FROM OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
7. PRELIMINARY PART NUMBER.
8. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

	A	FINISH	PART NUMBER
7	3.50 [.137]	6	1-207365-0
8 OBSOLETE	7.52 [.296]	6	~~207365-9~~
	4.72 [.186]	6	207365-8
	4.72 [.186]	5	207365-7
	7.52 [.296]	4	207365-6
	4.72 [.186]	4	207365-3
	4.72 [.186]	3	207365-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± 0.25 [.010]
3 PLC ± -
4 PLC ± -
ANGLES ± -

MATERIAL HOUSING: 1 CONTACTS: 2

FINISH CONTACTS: SEE TABLE

DWN L.SIPE 07/20/92
CHK R.STONE 7-24-92
APVD A.TRAVIS 7-24-92
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

Tyco Electronics
Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
PIN HEADER ASSEMBLY, 3 POSN, IN-LINE, SMALL METRIC CONNECTOR, METRIMATE

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A2	00779	C-207365	—

CUSTOMER DRAWING

SCALE	SHEET	REV
2:1	1 OF 1	L2

207365