

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0191930016](#)
Status: **Active**
Description: VersaKrimp™ Ring Tongue Terminal for 18-22 AWG Wire

Documents:
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR18689
UL	E32244

General

Product Family	Ring and Spade Terminals
Series	19193
Crimp Quality Equipment	Yes
Mil-Spec	N/A
Product Name	VersaKrimp™
Type	Ring

Physical

Barrel Type	Closed - Brazed
Insulation	None
Material - Plating Mating	Tin
Packaging Type	Bag
Stud Size	10 (M5)
Wire Size AWG	18, 20, 22
Wire Size mm²	0.35 - 0.80

Material Info

Old Part Number	AA-321-10
-----------------	-----------

Reference - Drawing Numbers

Sales Drawing	AACD30101
---------------	-----------




image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

[19193Series](#)

Application Tooling | FAQ

*Tooling specifications and manuals are
found by selecting the products below.
Crimp Height Specifications are then
contained in the Application Tooling
Specification document.*

Global

Description	Product #
Hand Crimp Tool	0640030100
Crimp Head for the AT-200™ Pneumatic Hand Tool	0640070100

NOTES:

① MAT'L: COPPER

PLATING: ELECTRO-TIN (.0003 MIN.)


② BRAZED SEAM

STUD SIZES: (.005)

02 = .094
04 = .119
06 = .146
08 = .173
10 = .198
14 = .265
56 = .328
38 = .390
209 = .209

"UL" LISTING *E32244
"CSA" LISTING *18689

ALL DIMENSIONS = $\frac{\text{INCHES}}{\text{MM}}$

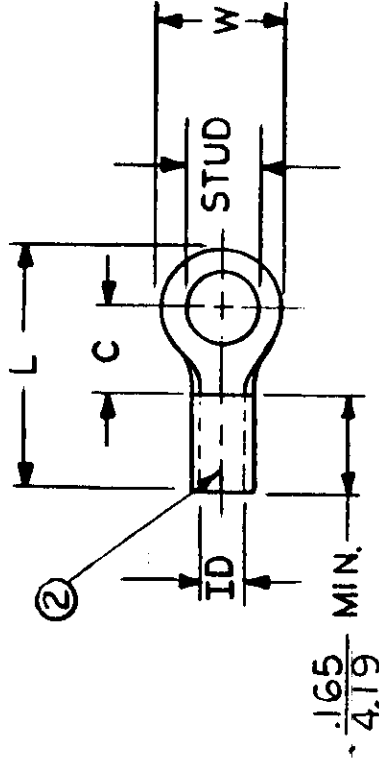

WIRE SIZE: 22-18 AWG
25-1.5 MM²

PART NUMBER	"W" ±.010	"C" MIN.	"L" MAX.	"ID" MIN.	AVAILABLE STUD SIZES	STOCK THICKNESS	
AA-320 -	$\frac{.225}{5.72}$	$\frac{.157}{3.99}$	$\frac{.484}{12.29}$	$\frac{.062}{1.57}$	02, 04, 06	$\frac{.028 \pm .001}{.71}$	
AA-321 -	$\frac{.312}{7.93}$	$\frac{.270}{6.86}$	$\frac{.641}{16.28}$	$\frac{.062}{1.57}$	06, 08, 10, 209	$\frac{.028 \pm .001}{.71}$	
AA-322 -	$\frac{.467}{11.86}$	$\frac{.386}{9.80}$	$\frac{.835}{21.21}$	$\frac{.062}{1.57}$	10, 14, 56	$\frac{.028 \pm .001}{.71}$	
AA-326 -	$\frac{.534}{13.56}$	$\frac{.552}{14.02}$	$\frac{1.034}{26.26}$	$\frac{.054}{1.37}$	10, 14, 56, 38	$\frac{.031 \pm .001}{.79}$	
AA-332 -	$\frac{.254}{6.45}$	$\frac{.240}{6.10}$	$\frac{.582}{14.78}$	$\frac{.062}{1.57}$	04, 06, 08	$\frac{.028 \pm .001}{.71}$	
REFERENCE SCALE: NTS DATE TITLE: RING TONGUE TERMINAL VERSAKRIMP 300-SERIES							ETC INCORPORATED
DIMENSIONAL TOLERANCES UNLESS OTHERWISE SPECIFIED FRAC. DEC. ANG.							DWG. NO. A CUSTOMER DWG.