
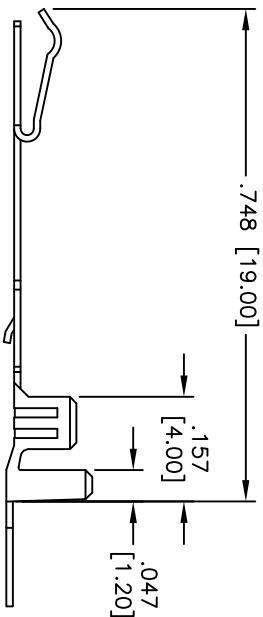



Rev	AWO #	Description	Date	Appr
-		RELEASED	2/02/10	

APPROVED: _____

DATE: _____ TITLE: _____

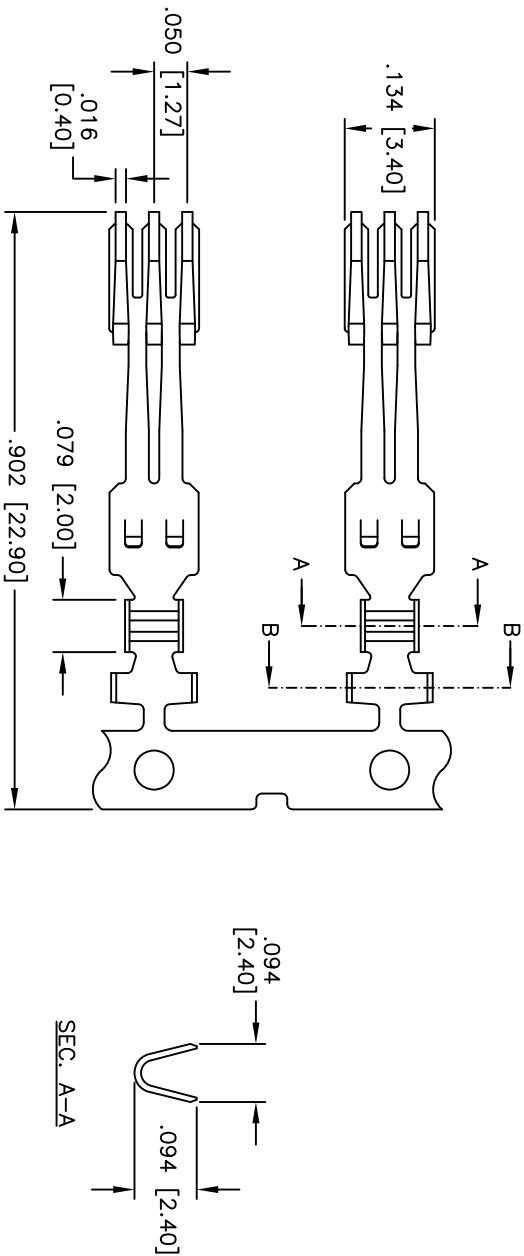

SEC. B-B



SPECIFICATIONS:

Material:
Contact: Phosphor Bronze

Plating:
Gold flash over Nickel underplate on contact area,
Tin over Copper underplate on tails.

Electrical:
Operating voltage: 15V DC
Wire range: 18–22 AWG
Current rating: 1.5A DC max
Contact resistance: Initially 30mohms max.
45mohms max. after stress

Dielectric withstanding voltage: 500V AC/Minute

Temperature Rating:
Ambient temperature: –35°C to +85°C

Environmental:
Lead free, RoHS compliant

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE
.050 [1.27] CRIMP TERMINAL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				Holes			
INCHES				Holes			
.X	± .10	ØX	± .10	.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015	.XX	± .015	ØXX	± .010
.XXX	± .015	ØXXX	± .010	.XXX	± .010	ØXXX	± .010
APPROVALS				DATE			
DRAWN	DY		2/02/10	CHECKED			
APPROVED							
SIZE	PART NO.	127CTA-R	REV.	REF:	S0004T	SCALE:	NTS
X			-				