

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0015389212

Status:


Active

Overview:

cgrid_sl_products

Description:

2.54mm (.100") Pitch SL™ FFC/FPC Connector - Single Row Male Version D, 21 Circuits

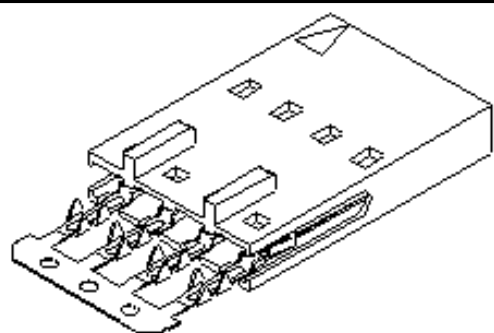

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-70430 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification

CSA	LR19980
UL	E29179

General

Product Family	FFC/FPC Connectors
Series	70431
Comments	Male
Overview	cgrid_sl_products
Product Name	SL™

Physical

Circuits (Loaded)	21
Color - Resin	Black
Contact Position	N/A
Durability (mating cycles max)	25
Entry Angle	Vertical
Flammability	94V-0
Material - Metal	Phosphor Bronze
Material - Plating Mating	Tin
Material - Plating Termination	Tin
Material - Resin	Polyester Alloy
Number of Rows	1
Orientation	Vertical
PCB Locator	No
PCB Retention	None
Packaging Type	Tube
Pitch - Mating Interface (in)	0.100 In
Pitch - Mating Interface (mm)	2.54 mm
Plating min: Mating (µin)	150
Plating min: Mating (µm)	3.75
Plating min: Termination (µin)	150
Plating min: Termination (µm)	3.75
Polarized to PCB	No
Stackable	Yes
Surface Mount Compatible (SMC)	N/A
Temperature Range - Operating	-40°C to +105°C
Termination Interface: Style	IDT or Pierce
Wire/Cable Type	FFC/FPC

Electrical

Current - Maximum per Contact	2A
Voltage - Maximum	250V

Material Info

Reference - Drawing Numbers

EU RoHS

ELV and RoHS
Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free
Status
Not Reviewed

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)


Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series
70431Series



This document was generated on 05/18/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

OPTION -A-


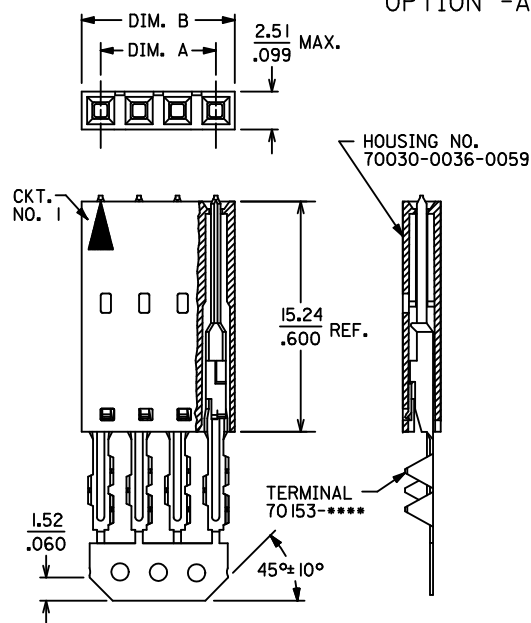


OPTION -D-

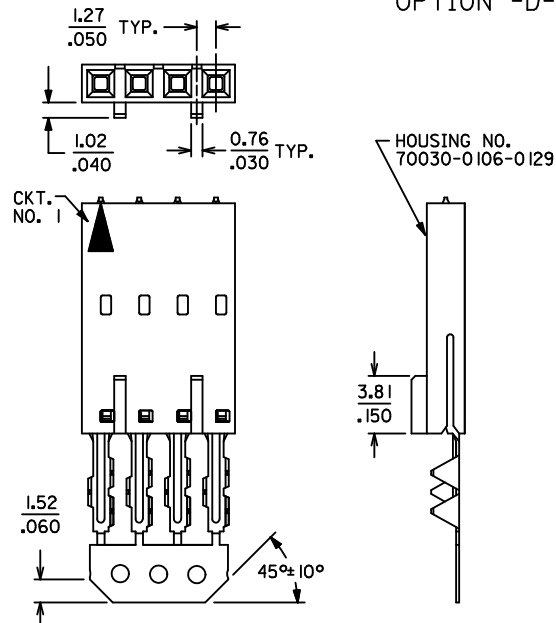

OPTIONAL CORE-OUT FOR
HOUSING OPTIONS A & D
CKT. SIZES 2-25
(FOR CONTROL OF BOW)

OPTION -G-

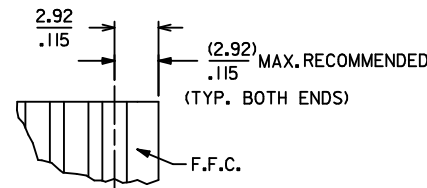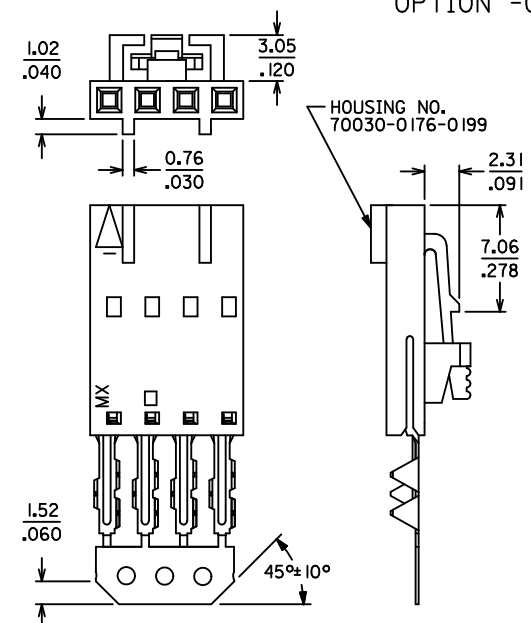

- NOTES:
- HOUSING: POLYESTER (PBT), UL94 V-0
COLOR: BLACK
 - FINISHES:
SEE PAGE 2 FOR PLATING FINISHES
 - PRODUCT SPECIFICATION: PS-70430
 - PACKAGING SPECIFICATION: PK-70873-0001
 - SEE CHART FOR CIRCUIT SIZES
 - TERMINALS ARE SHOWN PRE-LOADED INTO HOUSING
AND LOCKED INTO FIRST ROW OF LOCKING TANG
WINDOWS
 - ALL DIMENSIONS ARE FOR REFERENCE ONLY
 - SEE SHEET 2 FOR PART NUMBERS AND PLATINGS

CKT. SIZE	DIM. A (MAX.)	DIM. B (MAX.)
2	(2.54) .100	(5.05) .199
3	(5.08) .200	(7.59) .299
4	(7.62) .300	(10.13) .399
5	(10.16) .400	(12.67) .499
6	(12.70) .500	(15.21) .599
7	(15.24) .600	(17.75) .699
8	(17.78) .700	(20.29) .799
9	(20.32) .800	(22.83) .899
10	(22.86) .900	(25.37) .999
11	(25.40) 1.000	(27.91) 1.099
12	(27.94) 1.100	(30.45) 1.199
13	(30.48) 1.200	(32.99) 1.299
14	(33.02) 1.300	(35.53) 1.399
15	(35.56) 1.400	(38.07) 1.499
16	(38.10) 1.500	(40.61) 1.599
17	(40.64) 1.600	(43.15) 1.699
18	(43.18) 1.700	(45.69) 1.799
19	(45.72) 1.800	(48.23) 1.899
20	(48.26) 1.900	(50.77) 1.999
21	(50.80) 2.000	(53.31) 2.099
22	(53.34) 2.100	(55.85) 2.199
23	(55.88) 2.200	(58.39) 2.299
24	(58.42) 2.300	(60.93) 2.399
25	(60.96) 2.400	(63.47) 2.499

MODIFY PRODUCT SPEC EC NO: UCP2010-0987 DRWN:MSIBARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11	DESCRIPTION	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 4:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
				mm	INCH	DRAWN BY MGB	DATE 12/21/88	TITLE ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID	
			4 PLACES	±---	±---	CHECKED BY	DATE		
			3 PLACES	±---	±---	MGB	12/21/88		
			2 PLACES	±---	±---	APPROVED BY	DATE		
			1 PLACE	±---	±---	WAZ	12/21/88		
			ANGULAR ±1/2°		MATERIAL NO.		DOCUMENT NO.	SHEET NO. 1 OF 2	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		SDA-70431-****					
REV		SIZE C	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

	13	12	11	10	9	8	7	6	5	4	3	2	1																																																								
J	CKT. SIZE	TIN PLATE OPTION -A-		TIN PLATE OPTION -D-		15 GOLD PLATE OPTION -A-		15 GOLD PLATE OPTION -D-		30 GOLD PLATE OPTION -A-		30 GOLD PLATE OPTION -D-		TIN PLATE OPTION -G-																																																							
		EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.	EDP. NO.	ENG. NO.																																																						
	2	I5-38-9020	A-70431-0001	I5-38-9022	A-70431-0071	I5-47-4028	A-70431-0176	I5-47-5020	A-70431-0246	I5-47-5022	A-70431-0351	I5-47-5024	A-70431-0421																																																								
	3	-9030	-0002	-9032	-0072	-4038	-0177	-5030	-0247	-5032	-0352	-5034	-0422																																																								
	4	-9040	-0003	-9042	-0073	-4048	-0178	-5040	-0248	-5042	-0353	-5044	-0423																																																								
I	5	-9050	-0004	-9052	-0074	-4058	-0179	-5050	-0249	-5052	-0354	-5054	-0424																																																								
	6	-9060	-0005	-9062	-0075	-4068	-0180	-5060	-0250	-5062	-0355	-5064	-0425																																																								
	7	-9070	-0006	-9072	-0076	-4078	-0181	-5070	-0251	-5072	-0356	-5074	-0426																																																								
	8	-9080	-0007	-9082	-0077	-4088	-0182	-5080	-0252	-5082	-0357	-5084	-0427																																																								
	9	-9090	-0008	-9092	-0078	-4098	-0183	-5090	-0253	-5092	-0358	-5094	-0428																																																								
	10	-9100	-0009	-9102	-0079	-4108	-0184	-5100	-0254	-5102	-0359	-5104	-0429	I5-38-9103	A-70431-0149																																																						
	11	-9110	-0010	-9112	-0080	-4118	-0185	-5110	-0255	-5112	-0360	-5114	-0430																																																								
H	12	-9120	-0011	-9122	-0081	-4128	-0186	-5120	-0256	-5122	-0361	-5124	-0431																																																								
	13	-9130	-0012	-9132	-0082	-4138	-0187	-5130	-0257	-5132	-0362	-5134	-0432																																																								
	14	-9140	-0013	-9142	-0083	-4148	-0188	-5140	-0258	-5142	-0363	-5144	-0433																																																								
	15	-9150	-0014	-9152	-0084	-4158	-0189	-5150	-0259	-5152	-0364	-5154	-0434																																																								
	16	-9160	-0015	-9162	-0085	-4168	-0190	-5160	-0260	-5162	-0365	-5164	-0435																																																								
	17	-9170	-0016	-9172	-0086	-4178	-0191	-5170	-0261	-5172	-0366	-5174	-0436																																																								
G	18	-9180	-0017	-9182	-0087	-4188	-0192	-5180	-0262	-5182	-0367	-5184	-0437																																																								
	19	-9190	-0018	-9192	-0088	-4198	-0193	-5190	-0263	-5192	-0368	-5194	-0438																																																								
	20	-9200	-0019	-9202	-0089	-4208	-0194	-5200	-0264	-5202	-0369	-5204	-0439																																																								
	21	-9210	-0020	-9212	-0090	-4218	-0195	-5210	-0265	-5212	-0370	-5214	-0440																																																								
	22	-9220	-0021	-9222	-0091	-4228	-0196	-5220	-0266	-5222	-0371	-5224	-0441																																																								
	23	-9230	-0022	-9232	-0092	-4238	-0197	-5230	-0267	-5232	-0372	-5234	-0442																																																								
	24	-9240	-0023	-9242	-0093	-4248	-0198	-5240	-0268	-5242	-0373	-5244	-0443																																																								
F	25	I5-38-9250	A-70431-0024	I5-38-9252	A-70431-0094	I5-47-4258	A-70431-0199	I5-47-5250	A-70431-0269	I5-47-5252	A-70431-0374	I5-47-5254	A-70431-0444																																																								
<table><tr><td>PLATING PER ES-88:</td><td>CARRIER STRIP COLOR CODE</td></tr><tr><td>TIN</td><td>NONE</td></tr><tr><td>15 GOLD</td><td>YELLOW</td></tr><tr><td>30 GOLD</td><td>RED</td></tr></table> PLATING CHART PER ES-88-*** TIN: TIN OVERALL THICKNESS: 3.81 MICROMETERS (150 MICROINCHES) MINIMUM ALL OVER A NICKEL UNDERPLATE. 15 GOLD: SELECTIVE GOLD (Au) WITH SELECTIVE TIN THICKNESS: 0.38 MICROMETERS (15 MICROINCHES) MINIMUM GOLD (Au) IN SELECT AREA 1.90 MICROMETERS (75 MICROINCHES) MINIMUM TIN IN SELECT AREA ALL OVER A NICKEL UNDERPLATE. 30 GOLD: SELECTIVE GOLD (Au) WITH SELECTIVE TIN THICKNESS: 0.76 MICROMETERS (30 MICROINCHES) MINIMUM GOLD (Au) IN SELECT AREA 1.90 MICROMETERS (75 MICROINCHES) MINIMUM TIN IN SELECT AREA ALL OVER A NICKEL UNDERPLATE.																PLATING PER ES-88:	CARRIER STRIP COLOR CODE	TIN	NONE	15 GOLD	YELLOW	30 GOLD	RED	E																																													
PLATING PER ES-88:	CARRIER STRIP COLOR CODE																																																																				
TIN	NONE																																																																				
15 GOLD	YELLOW																																																																				
30 GOLD	RED																																																																				
D	<table><tr><td rowspan="5">SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11</td><td rowspan="5">QUALITY SYMBOLS</td><td colspan="2">GENERAL TOLERANCES (UNLESS SPECIFIED)</td><td colspan="2">DIMENSION STYLE MM/IN</td><td>SCALE 1:1</td><td>DESIGN UNITS INCH</td><td colspan="2">THIRD ANGLE PROJECTION</td><td colspan="5" rowspan="3">ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID</td></tr><tr><td rowspan="2">mm</td><td rowspan="4">INCH</td><td rowspan="2">DRAWN BY MGB</td><td rowspan="4">DATE 12/21/88</td><td rowspan="2">CHECKED BY MGB</td><td rowspan="4">DATE 12/21/88</td><td rowspan="2">APPROVED BY WAZ</td><td colspan="6" rowspan="2">DATE 12/21/88</td></tr><tr></tr><tr><td colspan="2">ANGULAR ±1/2°</td><td colspan="2">DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS</td><td colspan="2">SEE TABLE</td><td colspan="2">MATERIAL NO.</td><td colspan="2">DOCUMENT NO.</td><td colspan="2">SHEET NO. 2 OF 2</td></tr><tr><td colspan="2">SIZE</td><td colspan="11">THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION</td></tr></table>															SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID					mm	INCH	DRAWN BY MGB	DATE 12/21/88	CHECKED BY MGB	DATE 12/21/88	APPROVED BY WAZ	DATE 12/21/88						ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		MATERIAL NO.		DOCUMENT NO.		SHEET NO. 2 OF 2		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION											B
SEE SHEET 1 EC NO: UCP2010-0987 DRAWN:MS BARRA 2009/12/28 CHKD:DMORGAN 2010/01/08 APPR:SMILLER 2010/01/11	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 1:1	DESIGN UNITS INCH	THIRD ANGLE PROJECTION		ASSY, SL CONNECTOR, FFC MALE, SINGLE ROW 2.54/.100 GRID																																																											
		mm	INCH	DRAWN BY MGB	DATE 12/21/88	CHECKED BY MGB	DATE 12/21/88	APPROVED BY WAZ	DATE 12/21/88																																																												
		ANGULAR ±1/2°		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE TABLE		MATERIAL NO.		DOCUMENT NO.		SHEET NO. 2 OF 2																																																									
		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																																																	
A																A																																																					
	12	11	10	9	8	7	6	5	4	3	2	1																																																									