

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

- . - .


© COPYRIGHT - By TE CONNECTIVITY

ALL RIGHTS RESERVED.


LOC
HBDIST
-

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	D	PN. OBSOLETE	ECO-12-004810	24-APR-12	BLJ BH,Y

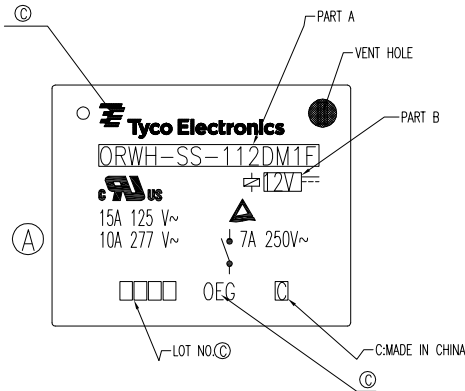


CIRCUIT DIAGRAM (BOTTOM VIEW)




DRILLING DIAGRAM (BOTTOM VIEW)

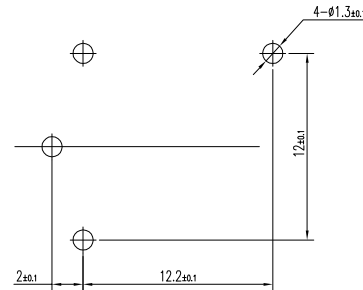

①	STATUS	TE PART NO	DESCRIPTION	PART B	PART A	ITEM
	OBSOLETE	1721153-1	ORWH-SS-103DM1F, 000	3V	ORWH-SS-103DM1F	A
	OBSOLETE	1721153-2	ORWH-SS-105DM1F, 000	5V	ORWH-SS-105DM1F	B
	ACTIVE	1721153-3	ORWH-SS-106DM1F, 000	6V	ORWH-SS-106DM1F	C
	OBSOLETE	1721153-4	ORWH-SS-109DM1F, 000	9V	ORWH-SS-109DM1F	D
	ACTIVE	1721153-5	ORWH-SS-112DM1F, 000	12V	ORWH-SS-112DM1F	E
	OBSOLETE	1721153-6	ORWH-SS-118DM1F, 000	18V	ORWH-SS-118DM1F	F
	ACTIVE	1721153-7	ORWH-SS-124DM1F, 000	24V	ORWH-SS-124DM1F	G
	OBSOLETE	1721153-8	ORWH-SS-148DM1F, 000	48V	ORWH-SS-148DM1F	H
	OBSOLETE	1721153-9	ORWH-SH-103DM1F, 000	3V	ORWH-SH-103DM1F	I
	OBSOLETE	1-1721153-0	ORWH-SH-105DM1F, 000	5V	ORWH-SH-105DM1F	J
	OBSOLETE	1-1721153-1	ORWH-SH-106DM1F, 000	6V	ORWH-SH-106DM1F	K
	ACTIVE	1-1721153-2	ORWH-SH-109DM1F, 000	9V	ORWH-SH-109DM1F	L
	ACTIVE	1-1721153-3	ORWH-SH-112DM1F, 000	12V	ORWH-SH-112DM1F	M
	OBSOLETE	1-1721153-4	ORWH-SH-118DM1F, 000	18V	ORWH-SH-118DM1F	N
	ACTIVE	1-1721153-5	ORWH-SH-124DM1F, 000	24V	ORWH-SH-124DM1F	O
	ACTIVE	1-1721153-6	ORWH-SH-148DM1F, 000	48V	ORWH-SH-148DM1F	P

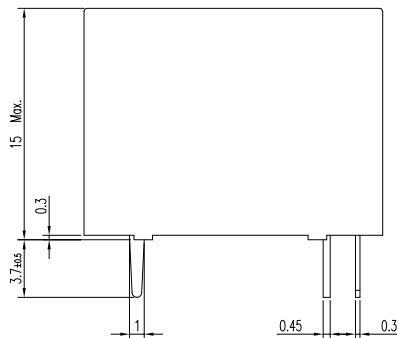


NOTE
① LOT NO. SYSTEM AS FOLLOWING:
WEEK
YEAR

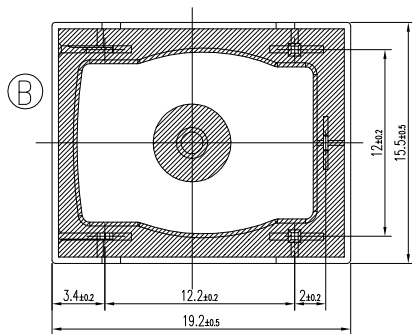

GENERAL TOLERANCE

Diagram dimension	Tolerance
0.99mm max.	±0.1mm
1 - 2.99mm	±0.2mm
3mm min.	±0.3mm

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL

TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC ±
1 PLC ±
2 PLC ±
3 PLC ±
4 PLC ±
ANGLES ±

FINISH

DWN
XN.ZHANGCHK
WAYNE.PENGAPVD
MJ.HO

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

		UV RESIN	UV SEAL(FOR SH)	13
		EPOXY RESIN	SEAL	12
CLASS 155 F		MW79	MAGNETIC WIRE	11
		HCP	COIL TERMINAL	10
UL94 V-0		PBT	BOBBIN	9
UL94 V-0		PBT	CASE	8
		Ag ALLOY	STATIONARY CONTACT	7
		Ag ALLOY	MOVABLE CONTACT	6
		Cu ALLOY	MOVABLE SPRING	5
		Cu ALLOY	NO TERMINAL	4
		Cu PLATED STEEL	CORE	3
		Cu PLATED STEEL	ARMATURE FORM A	2
		Ni PLATED STEEL	YOKE	1
INCOMBUSTIBILITY	TREATMENT	MATERIAL	DESCRIPTION	ITEM

TE

TE Connectivity

NAME ORWH-1M CD FREE CUSTOMER DRAWING			
SIZE A3	CAGE CODE 00779	DRAWING NO C=1721153	RESTRICTED TO -
SCALE 3:1		SHEET 1 OF 1	REV D