



1N4728A THRU 1N4764A

1W EPITAXIAL ZENER DIODE

FEATURES


- Low profile package
- Built-in strain relief
- Low inductance
- High temperature soldering : 260°C /10 seconds at terminals
- Glass package has Underwriters Laboratory Flammability Classification
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: Molded Glass DO-41G
- Terminals: Axial leads, solderable per MIL-STD-750, Method 2026 guaranteed
- Polarity: Color band denotes positive end
- Mounting position: Any
- Weight: 0.012 ounce, 0.336 gram



DO-41(GLASS)

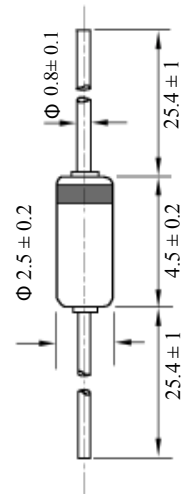

All Dimensions in mm

ABSOLUTE MAXIMUM RATINGS(LIMITING VALUES)(TA=25°C)

	Symbols	Value	Units
Zener current see table "Characteristics"			
Power dissipation at TA=50°C	P _{tot}	1 ¹⁾	W
Junction temperature	T _J	175	°C
Storage temperature range	T _{STG}	-65 to +175	°C
1)Valid provided that a distance of 8mm from case are kept at ambient temperature			

ELECTRCAL CHARACTERISTICS(TA=25°C)

	Symbols	Min	Typ	Max	Units
Thermal resistance junction to ambient	R _{thA}			170 ¹⁾	°C/W
Forward voltage at IF=200mA	V _F			1.2	V
1) Valid provided that a distance at 8mm from case are kept at ambient temperature					



1N4728A THRU 1N4764A

1W EPITAXIAL ZENER DIODE

Type	Nominal Zener Voltage ³⁾	Test Current	Maximum Zener Impedance ¹⁾			Maximum reverse leakage current		Surge current	Maximum regulator Current ²⁾	
	at I _{ZT} V _Z V	I _{ZT} mA	at I _{ZT} Z _{YT} Ω	Z _{ZK} Ω	at I _{ZK} mA	I _R μA	at V _R V	at T _A =0.25 I _R mA	I _{ZM} mA	
1N4728	3.3	76	10	400	1.0	100	1.0	1380	276	
1N4729	3.6	69	10				1.0	1260	252	
1N4730	3.9	64	9			50	1.0	1190	234	
1N4731	4.3	58	9				10	1.0	1070	217
1N4732	4.7	53	8	500		1.0		970	193	
1N4733	5.1	49	7	550		1.0		890	178	
1N4734	5.6	45	5	600		2.0		810	162	
1N4735	6.2	41	2	700		3.0		730	146	
1N4736	6.8	37	3.5			5.0		4.0	660	133
1N4737	7.5	34	4.0					5.0	605	121
1N4738	8.2	31	4.5		6.0			550	110	
1N4739	9.1	28	5.0		7.0		500	100		
1N4740	10	25	7		7.6		454	91		
1N4741	11	23	8		0.25		5	8.4	414	83
1N4742	12	21	9			9.1		380	76	
1N4743	13	19	10	9.9		344		69		
1N4744	15	17	14	11.4		304		61		
1N4745	16	15.5	16	12.2		285		57		
1N4746	18	14	20	750		13.7		250	50	
1N4747	20	12.5	22			15.2		225	45	
1N4748	22	11.5	23			16.7		205	41	
1N4749	24	10.5	25			18.2		190	38	
1N4750	27	9.5	35			20.6		170	34	
1N4751	30	8.5	40			1000		22.8	150	30
1N4752	33	7.5	45					25.1	135	27
1N4753	36	7.0	50					27.4	125	25
1N4754	39	6.5	60	29.7				115	23	
1N4755	43	6.0	70	1500				32.7	110	22
1N4756	47	5.5	80					35.8	95	19
1N4757	51	5.0	95					38.8	90	18
1N4758	56	4.5	110					2000	42.6	80
1N4759	62	4.0	125			47.1			70	14
1N4760	68	3.7	150			51.7			65	13
1N4761	75	3.3	175			56.0			60	12
1N4762	82	3.0	200			3000			62.2	55
1N4763	91	2.8	250	69.2					50	10
1N4764	100	2.5	350	76.0					45	9

Notes: 1) The Zener impedance is derived from the 1KHz AC voltage which results when an AC current having an RMS value equal to 10% of the Zener current (I_{ZT} or I_{ZK}) is superimposed on I_{ZT} or I_{ZK} . Zener impedance is measured at two points to insure a sharp knee on the breakdown curve and to eliminate unstable units.

2) Valid provided that electrodes at a distance of 10mm from case are kept at ambient temperature

3) Measured under thermal equilibrium and DC test conditions.



1N4728A THRU 1N4764A

RATINGS AND CHARACTERISTIC CURVES

FIG.1 – BREAKDOWN CHARACTERISTICS

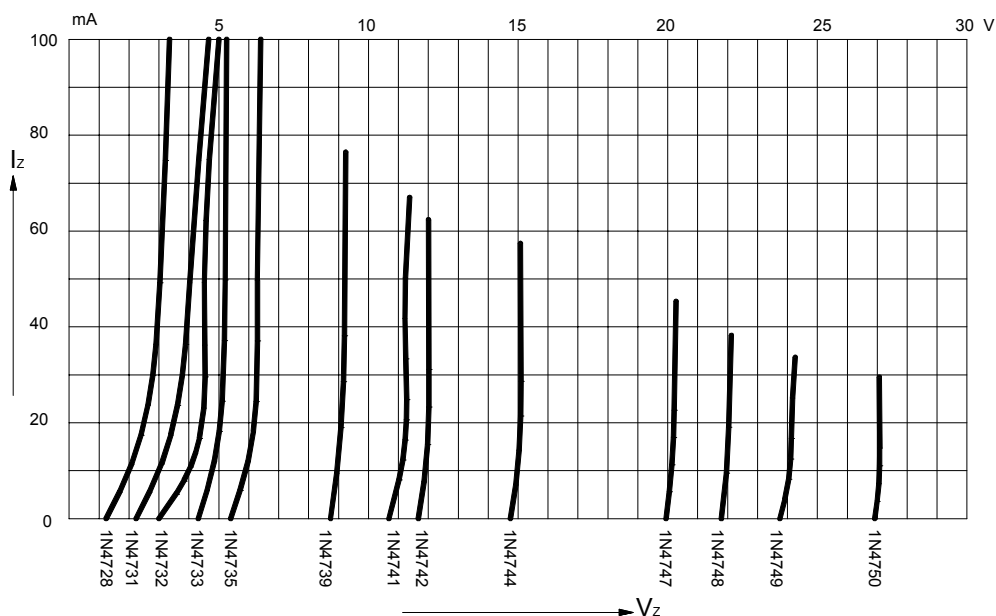


FIG.2 – ADMISSIBLE POWER DISSIPATION VERSUS AMBIENT TEMPERATURE

