

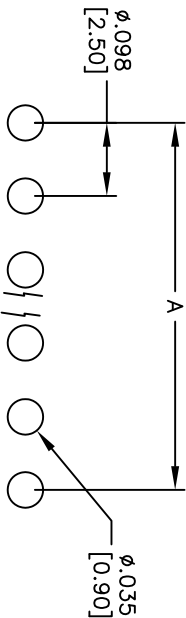
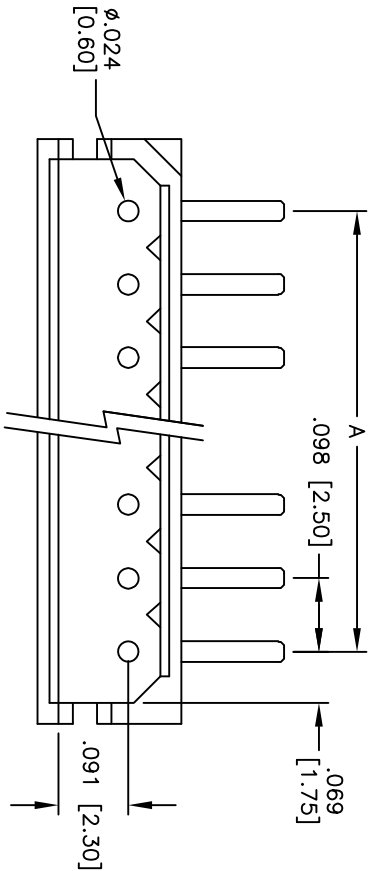


APPROVED: _____
DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/31/09	
A		REVISED SPEC.	05/15/12	

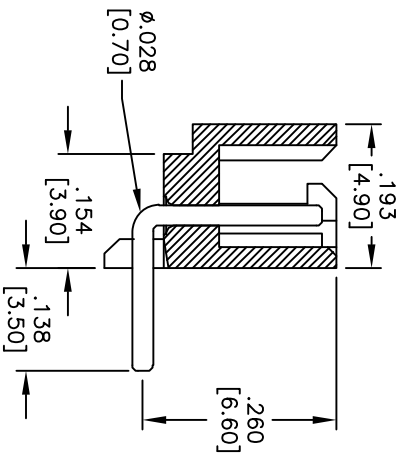

RECOMMENDED PCB LAYOUT

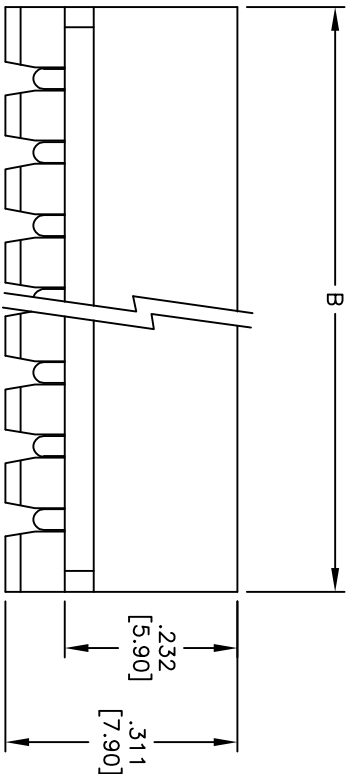

SPECIFICATIONS:

Material: Nylon66, rated UL 94V-0
Insulator color: Beige
Contacts: Brass
Plating: Tin over copper underplate overall.
Electrical:
Voltage Rating: 250V AC
Current Rating: 3 Amps Max
Dielectric Withstanding Voltage: 1000V AC for 1 minute.
Insulation Resistance: 1000 Megohms Min
Contact Resistance: 20 Milliohms Max
Temperature Range: -40°C to 105°C
Environmental:
Lead free, RoHS compliant

Positions: 02 thru 20
A = .098 [2.50] x No. of Spaces
B = .098 [2.50] x No. of Spaces + .197 [5.00]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

0.098 [2.50] PITCH WAFER, RIGHT ANGLE

PCB TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES .X ± .10 Ø.X ± .10 .XX ± .020 Ø.XX ± .015 .XXX ± .015 Ø.XXX ± .010										ADAM TECH 909 Rahway Avenue, Union, NJ 07083 Phone: 908-687-5000 Fax: 908-687-5710									
APPROVALS										DATE									
DRAWN					DY					7/31/09									
CHECKED																			
APPROVED																			
TITLE										.098 [2.50] PITCH WAFER, RIGHT ANGLE PCB TYPE									
SIZE					PART NO.					REV.									
X					25SH-E-XX-TR					A									
REF: S00123T					SCALE: NTS					SHEET 1 OF 1									

