

IGBT MODULE (L series)

■ Features

- High Speed Switching
- Low Saturation Voltage
- Voltage Drive

■ Applications

- Inverter for Motor Drive
- AC and DC Servo Drive Amplifier
- Uninterruptible Power Supply
- Industrial Machines, such as Welding Machines

■ Maximum Ratings and Characteristics

● Absolute Maximum Ratings

Items	Symbols	Ratings	Units
Collector-Emitter Voltage	V_{CES}	600	V
Gate-Emitter Voltage	V_{GES}	± 20	V
Collector Current	Continuous	I_C	300
	1ms	$I_{C\ pulse}$	600
	Continuous	$-I_C$	300
	1ms	$-I_{C\ pulse}$	600
Max. Power Dissipation	P_C	1200	W
Operating Temperature	T_j	+150	°C
Storage Temperature	T_{stg}	-40 to +125	°C
Net. Weight		410	g
Isolation Voltage	AC. 1min.	V_{isol}	2500
Screw Torque	Mounting *1	35	kg•cm
	Terminals *2	45	

*1 Recommendable Value 25 to 35kg•cm (M5)

*2 Recommendable Value 35 to 40kg•cm (M4)

● Electrical Characteristics ($T_j=25^\circ\text{C}$)

Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Zero Gate Voltage Collector Current	I_{CES}	$V_{GE}=0V$ $V_{CE}=600V$ $T_j=25^\circ\text{C}$			4.0	mA
Gate-Emitter Leakage Current	I_{GES}	$V_{CE}=0V$ $V_{GE}=\pm 20V$			200	nA
Gate-Emitter Threshold Voltage	$V_{GE(th)}$	$V_{CE}=20V$ $I_C=300mA$	3.0		6.0	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$V_{GE}=15V$ $I_C=300A$		2.7	3.5	V
Input Capacitance	C_{ies}	$V_{GE}=0V$		28500		pF
Output Capacitance	C_{oes}	$V_{CE}=10V$		—		
Reverse Transfer Capacitance	C_{res}	$f=1MHz$		—		
Turn-on Time *3	t_{on}	$V_{CC}=300V$		0.7	0.8	μs
	t_r	$I_C=300A$		0.4	0.6	
Turn-off Time *4	t_{off}	$V_{GE}=\pm 15V$		0.7	1.0	
	t_f	$R_G=6.8\Omega$		0.2	0.35	
Diode Forward On-Voltage	V_F	$I_F=300A$ $V_{GE}=0V$			2.5	V
Reverse Recovery Time	t_{rr}	$I_F=300A$ $-di/dt=900A/\mu s$ $V_{GE}=-10V$			300	ns


*3 Resistive load

*4 Inductive load


● Thermal Characteristics


Items	Symbols	Test Conditions	Min.	Typ.	Max.	Units
Thermal Resistance	$R_{th(j-c)}$	IGBT			0.104	°C/W
	$R_{th(j-e)}$	Diode			0.20	
	$R_{th(c-f)}$	With Thermal compound		0.025		

■ Outline Drawings

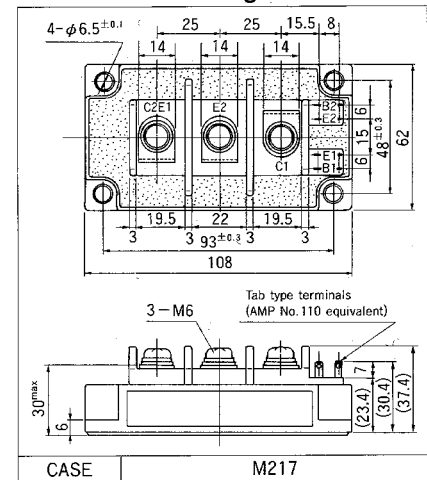


■ Equilavelent Circuit Schematic

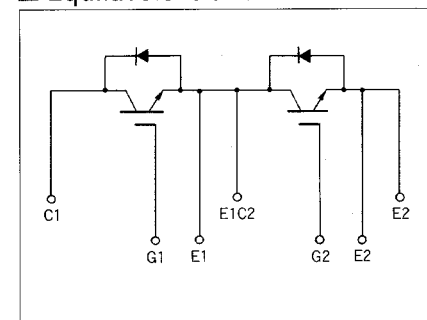


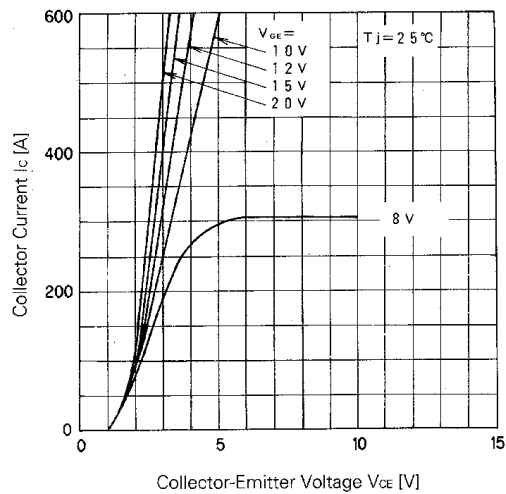


Collector Current vs. Collector-Emitter Voltage

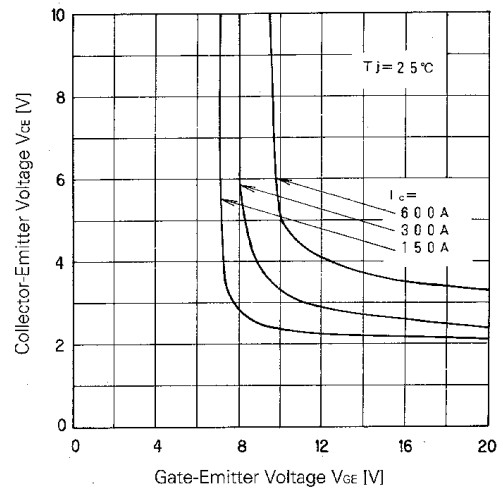


Collector-Emitter Voltage vs. Gate-Emitter Voltage

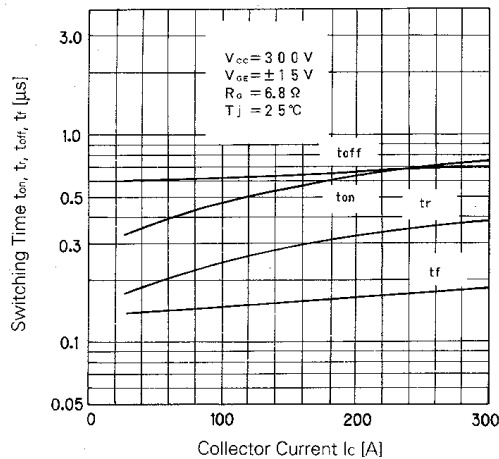


Switching Time

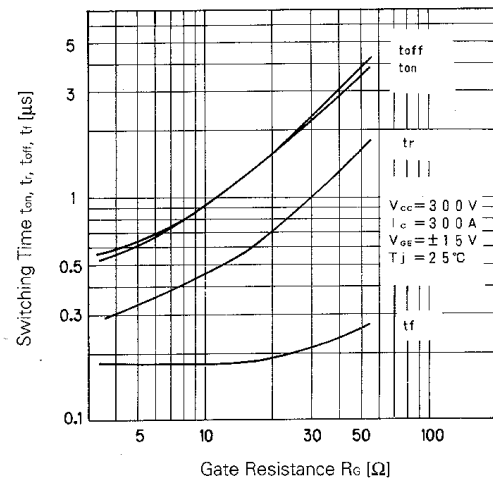





Switching Time-Gate Resistance

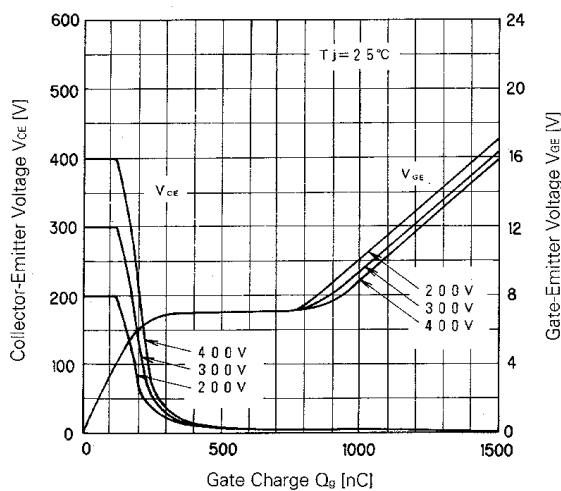

Dynamic Input Characteristic

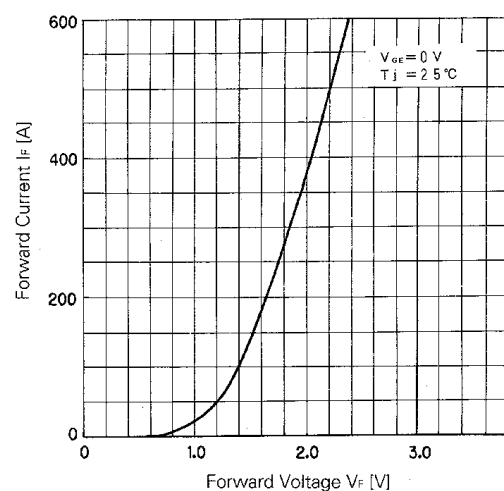

Forward Voltage of Free Wheel Diode

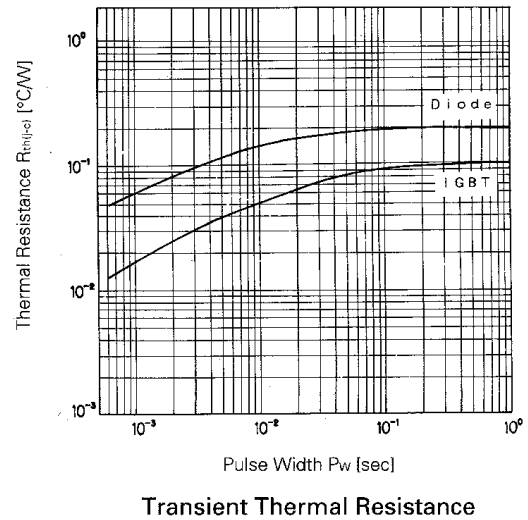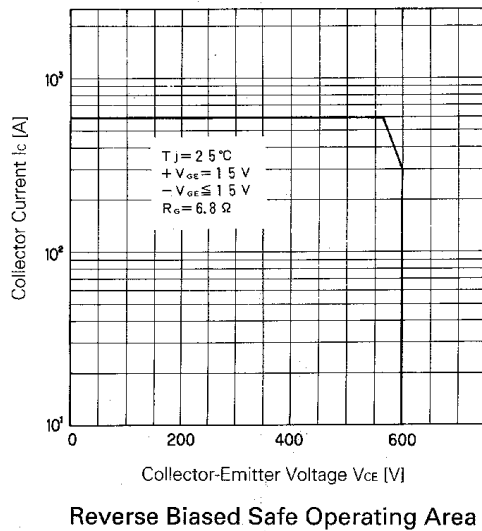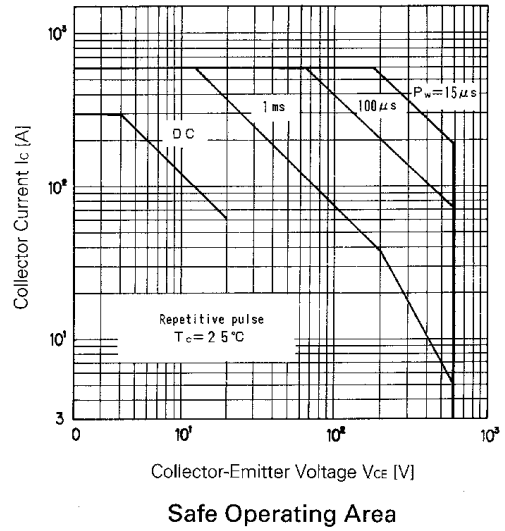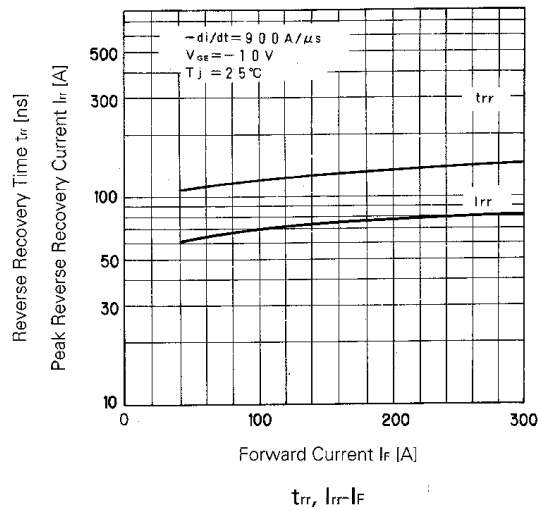

For more information, contact:

Collmer Semiconductor, Inc.

P.O. Box 702708

Dallas, TX 75370

972-733-1700

972-381-9991 Fax

<http://www.collmer.com>