FAST RECOVERY RECTIFIERS

VOLTAGE RANGE: 100 --- 200 V
CURRENT: 3.0 A


FEATURES

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon Alcohol,Isopropanol and similar solvents

MECHANICAL DATA

- ◇ Case:JEDEC DO--27,molded plastic
- ◇ Terminals: Axial lead ,solderable per MIL- STD-202,Method 208
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041ounces,1.15 grams
- ◇ Mounting position: Any

DO - 27

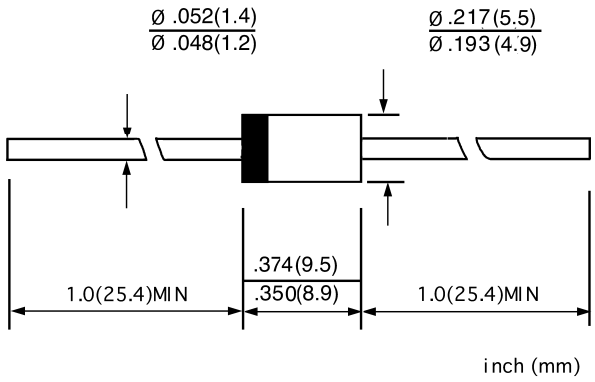

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25℃ ambient temperature unless otherwise specified.

Single phase,half wave,50Hz,resistive or inductive load. For capacitive load,derate by 20%.

		30 DF1	30 DF2	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	100	200	V
Maximum RMS voltage	V_{RMS}	70	140	V
Maximum DC blocking voltage	V_{DC}	100	200	V
Maximum average forw ard rectified current 9.5mm lead length, @T_A=75℃	$I_{F(AV)}$	3.0		A
Peak forw ard surge current 10ms single half-sine-w ave superimposed on rated load @T_J=125℃	I_{FSM}	200.0		A
Maximum instantaneous forw ard voltage @ 3.0A	V_F	1.0		V
Maximum reverse current @T_A=25℃ at rated DC blocking voltage @T_A=100℃	I_R	10.0 200.0		μA
Maximum reverse recovery time (Note1)	t_{rr}	200		ns
Typical junction capacitance (Note2)	C_J	32		pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	22		℃/W
Operating junction temperature range	T_J	-55 ---- + 150		℃
Storage temperature range	T_{STG}	-55 ---- + 150		℃


NOTE:1.Measured with I_F=0.5A, I_R=1A, I_{rr}=0.25A.

2.Measured at 1.0MHZ and applied rev erse v oltage of 4.0V DC.


3.Themal resistance from junction to ambient.

www.galaxycn.com

FIG.1 – REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

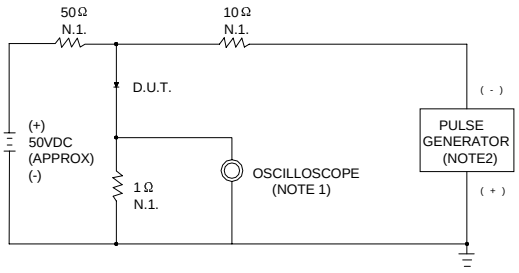

NOTES:1.RISE TIME =7ns MAX. INPUT IMPEDANCE=1MΩ.22pF
2.RISE TIME=10ns MAX. SOURCE IMPEDANCE=5OΩ

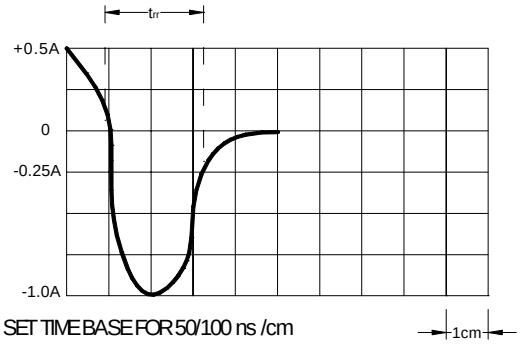

SET TIME BASE FOR 50/100 ns /cm

FIG.2 –FORWARD DERATING CURVE

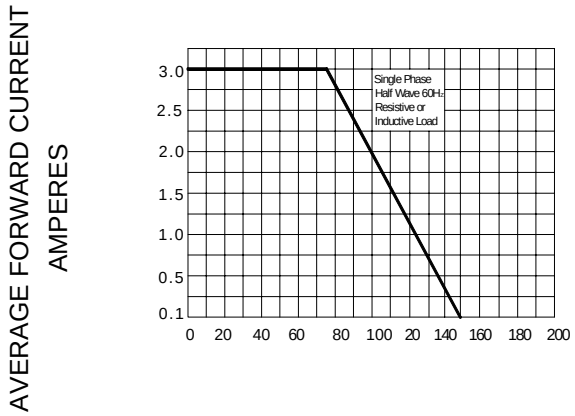


FIG.3 –PEAK FORWARD SURGE CURRENT

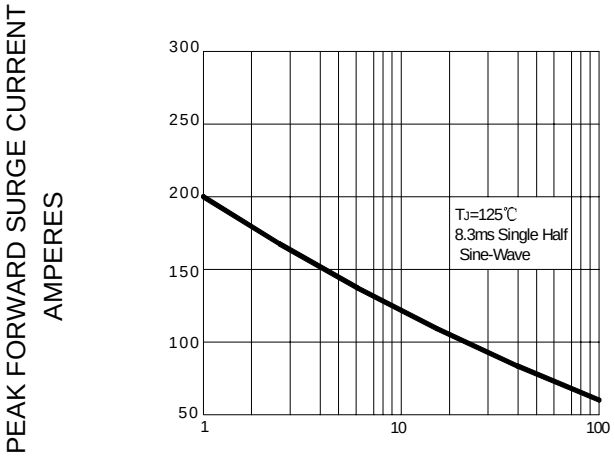


FIG.4–TYPICAL FORWARD CHARACTERISTIC

