



336SAK035M

RADIAL LEAD LOW PROFILE

Parts are RoHS compliant

Date code when parts became RoHS: 23

APPLICATIONS: General Purpose, Bypass, coupling, Filtering, Handheld devices

ELECTRICAL SPECIFICATIONS

Capacitance: 33 μ F

Dissipation Factor: 0.14 Max at 120 Hz and 20°C

Temperature Range: -40°C to +85°C

ESR: 7.033 Ohms Max at 20°C and 120 Hz

Impedance: N/A

Tolerance: -20 %, +20 %

WVDC: 35 Volts DC

SVDC: 44 Volts DC

Ripple Current: 100 mA at 120 Hz and 85°C

Impedance Ratios: -25°C/20°C 2 and -40°C/20°C - 4

Leakage Current: .03CV or 4 μ A, whichever is greater

34.7 μ A after 1 Minute

.01CV or 3 μ A, whichever is greater

11.6 μ A after 2 Minutes

Load Life: 2000 hours at 85°C with 100 % of rated voltage and with 0 % of rated ripple current

Capacitance Change: $\leq$ 20% of initial measured value

Dissipation Factor: $\leq$ 200% of maximum specified value

Leakage Current: $\leq$ 100% of maximum specified value

Frequency Multipliers:

50 HZ	120 HZ	400 HZ	1 KHZ	10 KHZ	100 KHZ
0.75	1	1.35	1.57	1.5	2

Temperature Multipliers:

45°C	60°C	70°C	65°C	75°C	85°C	105°C	125°C
1.8	1.7	1.4	1.6	1	1	0	0

PHYSICAL DIMENSIONS

Diameter (D): 5 mm + 0.5 mm

Length (L): 9 mm + 1 mm


Lead Spacing (S): 2 mm +/- 0.5 mm

Coating: BlackPET sleeving

Lead Wire Diameter (d): 0.5 mm +/- 0.05 mm

Lead Length: 15 mm +/- MIN mm

Lead Finish: Matte Tin

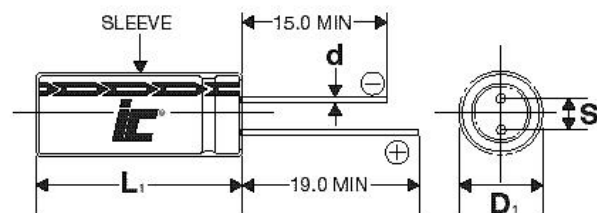

3757 W. Touhy Ave. Lincolnwood, IL 60712 (847) 675-1760 FAX (847) 673-2850
Illinois Capacitor (HK) Ltd., Tel: 85227930931, Fax: 85227930731, www.ilcap.com.hk
© Copyright 2017 Illinois Capacitor. A division of Cornell Dubilier, All Rights Reserved