
CAMBION â

Technical Data Sheet

Wearnes Cambion LTD
Castleton, Hope Valley, Derbyshire, S33 8WR, England
Telephone: +44(0)1433 621555 Fax: +44(0)1433 621290
Web: www.cambion.com Email: enquiries@cambion.com

350-7405 Spacer/Stand-off, round, thru hole, swage mount

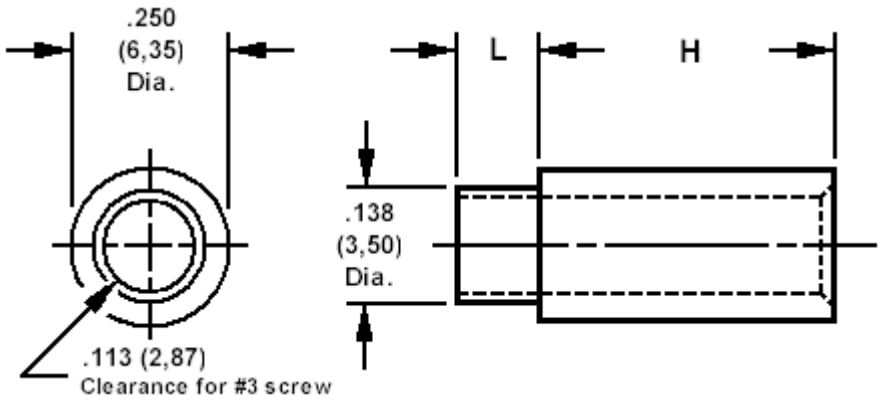

How to order code
350-7405-XX-YY-00
Basic Part No XX = H & L dimensions, YY = Plating Finish

DIMENSIONS (XX)								
Basic Part #	**(XX)**						**H**	**Swage Anvil**
350-7405	-01	-09	-17	-25	-33	-41	.125 (3,18)	A
	-02	-10	-18	-26	-34	-42	.188 (4,78)	A
	-03	-11	-19	-27	-35	-43	.250 (6,35)	B
	-04	-12	-20	-28	-36	-44	.375 (9,53)	B
	-05	-13	-21	-29	-37	-45	.500 (12,70)	C
	-06	-14	-22	-30	-38	-46	.625 (15,88)	C
	-07	-15	-23	-31	-39	-47	.750 (19,05)	D
	-08	-16	-24	-32	-40	-48	1.000 (25,40)	D
L	.062 (1,57)	.094 (2,39)	.125 (3,18)	.156 (3,96)	.219 (5,56)	.281 (7,14)		
For Board Thickness	.031 (0,79)	.062 (1,59)	.094 (2,38)	.125 (3,18)	.188 (4.76)	.250 (6,35)		

MATERIALS		
Component	**Material**	**Finish (YY)**
		-19
Spacer/Stand-Off	Aluminium	Clear Chromate

SWAGE TOOLING		
Recommended Swaging Tools:-		
Punch		435-6607-01-00-00
Anvil	A	435-6410-01-00-00
	B	435-6410-02-00-00
	C	435-6410-03-00-00
	D	435-6410-04-00-00

Copyright© Cambion® Wednesday, 11 June 2003