

MATERIAL AND FINISH:
Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:
Current rating: 10 A
Voltage rating: 250 VAC
Current rating: 15 A
Voltage rating: 250 VAC

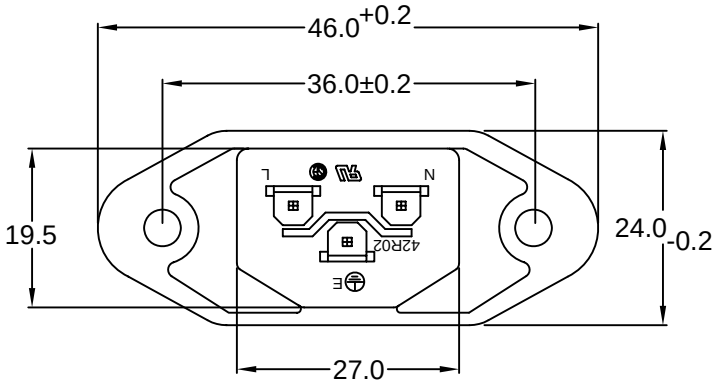

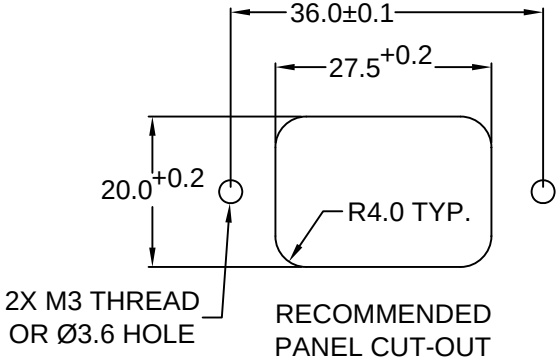

ORDERING CODE:
42R02-7 __ __ __
1 2 3

1 = TERMINAL OPTIONS
1 = .187(4.8)
2 = .250(6.3)


2 = COLOR
1 = BLACK
2 = GRAY


3 = ELECTRICAL CIRCUIT CONFIGURATION


1 = 15A 250V 120°C 2+GROUND

2 = 15A 250V 70°C 2+GROUND

4 = 15A 250V 70°C 2 POLE

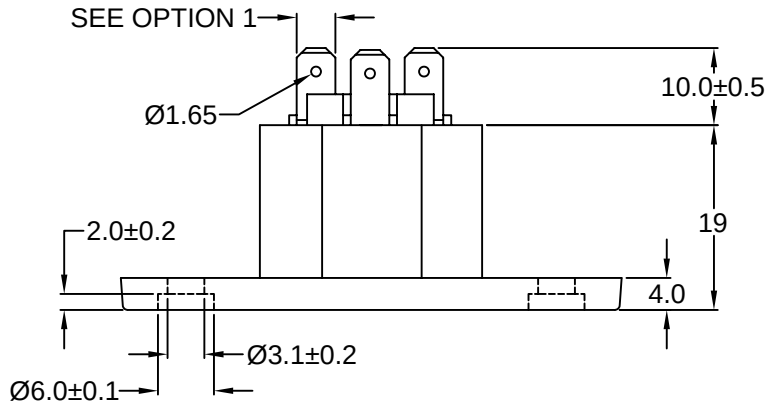



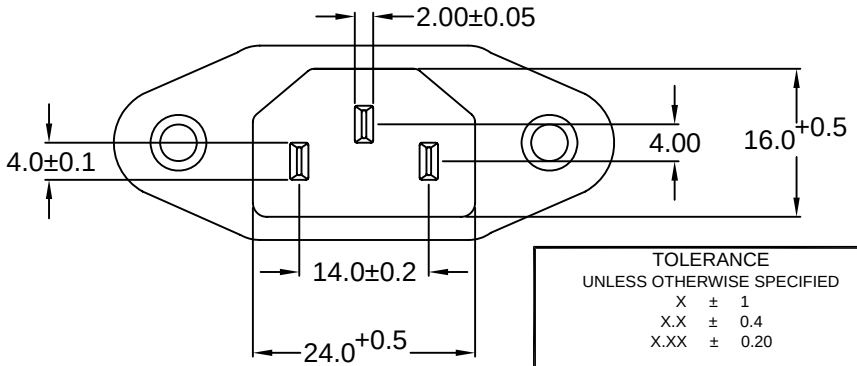

REVISIONS				
REV	DATE	CHANGE	CHNG	CHCK	APPR

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

RoHS COMPLIANT

DRAWN BY	GQ	DATE:	08/07/01
CHECK BY	TD	DATE:	8/14/01
APPR BY	PB	DATE:	8/14/01

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 C14 APPL. INLET; QUICK CONNECT TERMINALS; SIDE FLANGE

PART #: 42R02-7XXX

SHEET 1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: